

RANA Linear Surface&Suspended - Opal Diffuser
RANA LINEAR S 3KLM NW OPAL EM
0051283




PRODUCT OVERVIEW

Product name	RANA LINEAR S 3KLM NW OPAL EM
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Fixture rating	Enclosed
Environment	Internal
Warranty	5 years
Fixture luminous flux (lm)	3210
Luminaire efficacy (lm/W)	91.71
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Glare control	< 23
Photobiological Risk Group	RG0
Total power consumption (W)	35
Electrical protection	Class I
Control gear type	Electronic ballast
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK01
Product EAN number	5410288512839

PHOTOMETRY

RANA Linear Surface&Suspended - Opal Diffuser
RANA LINEAR S 3KLM NW OPAL EM
0051283

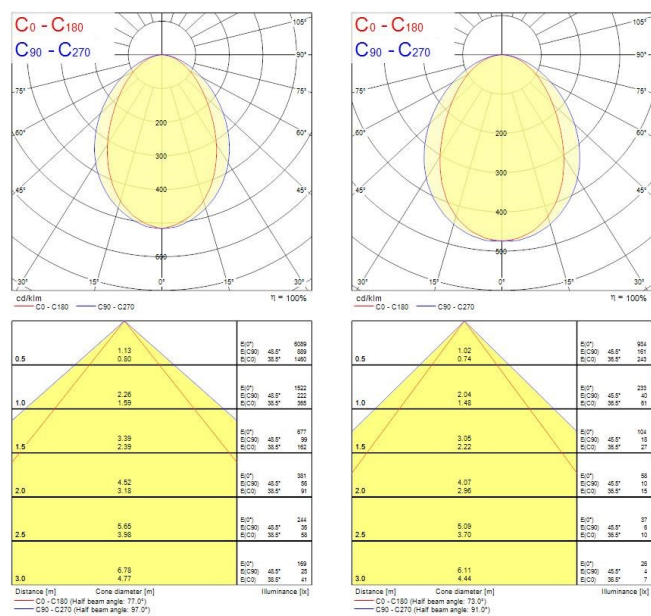

TECHNICAL DRAWINGS

