


EVMIF132X	G4 Rack PDU METERED INPUT		
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
CURRENT POWER AND ENERGY METERING FOR INPUT AND BRANCH	IEC 60309-2 32A 230V~ 6.0MM ² x 3C POWERCORD (LSZH) CABLE LENGTH: 3.0M	(24) IEC 60320 C13 HIGH RETENTION / P-LOCK (18) EATON C39 - COMBO C13/C19 HIGH RETENTION / P-LOCK (C19 ONLY)	OPERATING TEMPERATURE 0° TO 60° C 32° TO 140° F
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
1730mm (68.11") LENGTH 52mm (2.05") WIDTH 53mm (2.09") DEPTH ALUMINUM CHASSIS, BLACK	200-240V~ W+N+PE 32A 50/60Hz	200-240V~ 10A PER C13, 16A PER C39 16A MAX PER SECTION 32A MAX TOTAL	CE, UKCA, RCM, Cmim, Ukr, EAC
CIRCUIT BREAKERS	COMMUNICATION	ACCESSORIES	REGULATORY MODEL
(2) 16A 1-POLE	G4 NMC, DUAL GIGABIT ETHERNET WITH NETWORK CASCADING, POWER REDUNDANCY PORT, EMP PORT, 2xUSB-C, MENU PIXEL LCD, ADVANCED CYBERSECURITY UL 2900-1 and IEC 62443-4-2	SPARE PART ACCESSORY KIT SPK050 OPTIONAL ENVIRONMENTAL PROBE - EMPDT1H1C2 OPTIONAL G4 NMC - SPK055	EMIF-CHFB-C27K

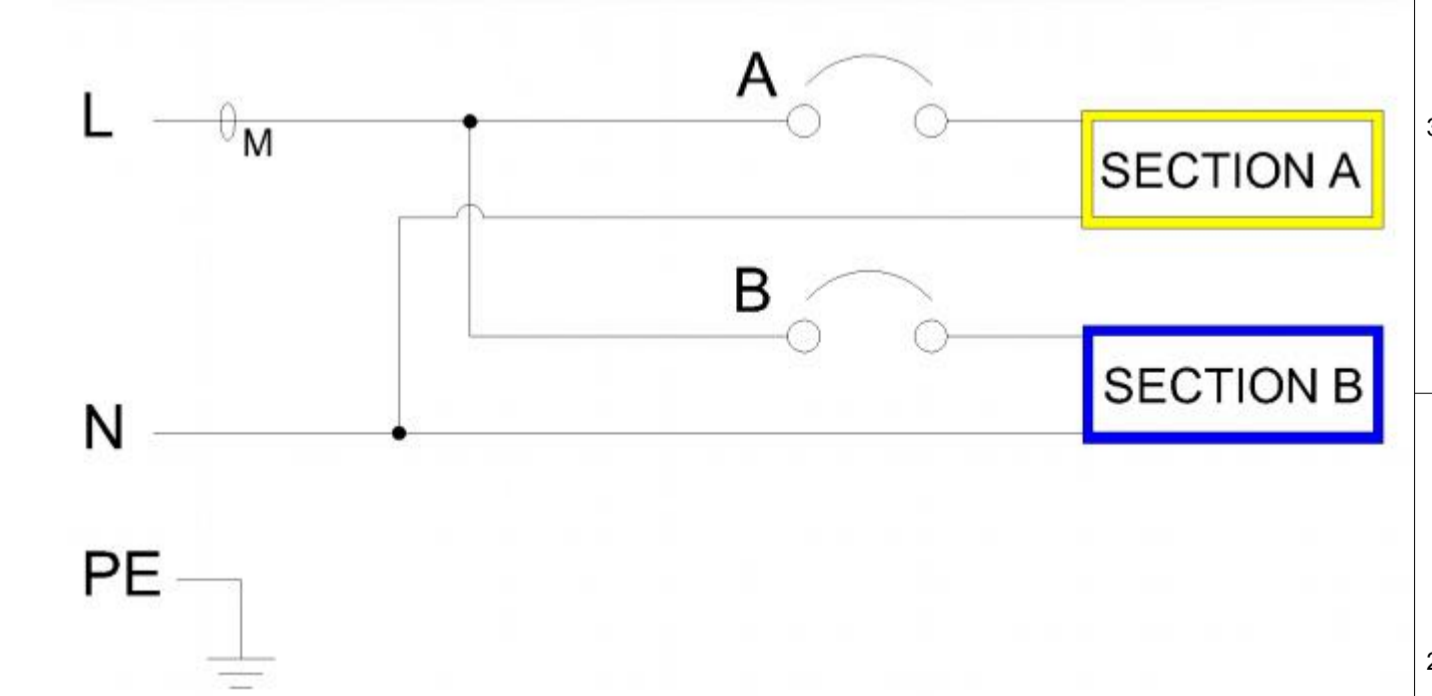

01 GLOBAL UPDATE	26.10.2023	RP	YS
00 FIRST RELEASE	05.10.2023	RP	YS
REV. MODIFICATION	DATE	DESSIN/DRAW	VERIF
EATON HEINEMANN PRODUCTS		ECHELLE / SCALE	N° MAG
CH-1345 LE LIEU SWITZERLAND		0.4	9001-22348
TRAITEMENT / FINISH NA		DESSINE LE / DRAWN THE	05.10.2023
MATIERE / MATERIAL NA		PAR / BY	RP
TOLERANCE GENERALE / GENERAL TOLERANCE ± 0.3 ± 0°20'		VERIFIE PAR / VERIFIED BY	YS
NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT X		DIMENSIONS AND TOLERANCES IN MILLIMETERS	
DESIGNATION	PDU G4 MI 0U 309 32A 1P 24xC13,18xC39	9001-22348_EVMIF132X	01
COTES A CONTROLER / INSPECTION DIMENSIONS	XX.X	COTES FONCTIONNELLES / FUNCTIONAL DIMENSIONS	XX.X
Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation.		This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.	