# Technical data sheet


## T piece for PYROLINE® Con S BSKH09-K0521 fire protection duct
## Item number: 7215641



T piece for PYROLINE® Con S fire protection duct, type BSKH09-K0521, consisting of fibreglass lightweight concrete which is resistant to water and frost, for the creation of T branches of the duct. Mounted connectors ensure quick mounting in situ, whilst loosely placed covers ensure quick inspection and reassignment.

Including connection screws and sealing strips.

Including connection screws and sealing strip.




Fibreglass lightweight concrete

### Master data


| | |
|---|---|
| Item number | 7215641 |
| Type | BSKH09-T0521 |
| Description 1 | T piece |
| Description 2 | for BSKH09-K0521 |
| Manufacturer | OBO |
| Dimension | 50x210 |
| Colour | Grey |
| Material | Fibreglass lightweight concrete |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 1812 kg |
| Weight unit | kg/100 pc. |

# Technical data sheet

## T piece for PYROLINE® Con S BSKH09-K0521 fire protection duct

## Item number: 7215641

### Dimensions

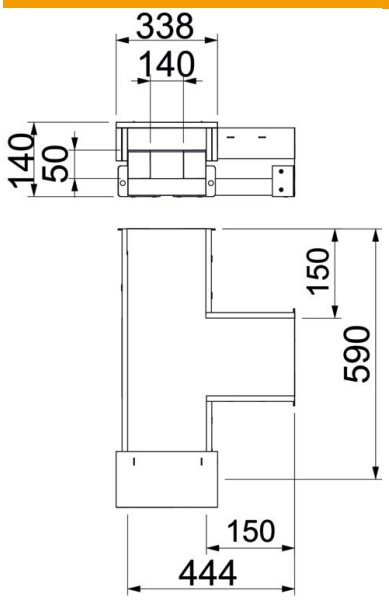


| | |
|---|---|
| External dimensions | 338 x 140 |
| Internal dimensions | 210 x 50 |
| Length | 640 mm |
| Width | 454 mm |
| Height | 140 mm |
| Dimension B | 338 mm |
| Dimension b | 210 mm |
| Dimension h | 50 mm |
| Dimension H | 140 mm |
| Dimension L | 590 mm |
| Dimension l | 444 mm |

### Technical data

| | |
|---|---|
| Number of flammable sides | 4 |
| Fire resistance class E − function maintenance | 30 |
| Fire resistance class I − installation duct | 90 |
| With perforation | no |
| ROHS-conformant | yes |
| Partitions possible | yes |
| Jacketing | Without |
| Material of the insulation | Glass-fibre lightweight concrete |