

Data Sheet | Item Number: 713-1477/107-000

THT male header, 2-row; 0.8 x 0.8 mm solder pin; straight; 100% protected against mismatching; with orientation nose; Threaded flange; Pin spacing 3.5 mm; 34-pole; black





<https://www.wago.com/713-1477/107-000>



Color: ■ black

Similar to illustration

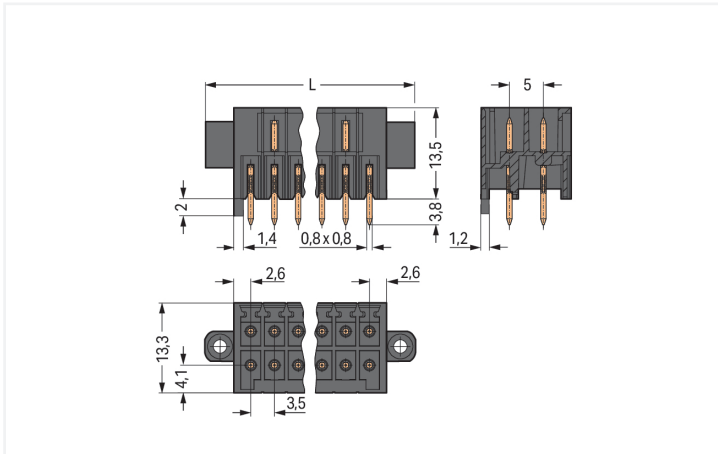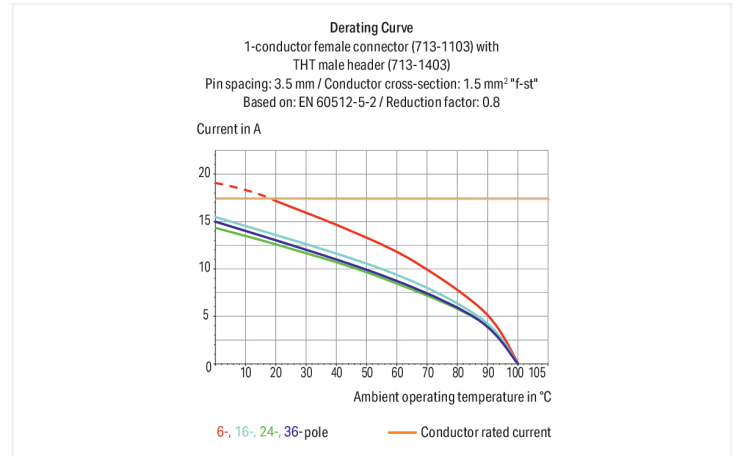

Dimensions in mm

$L = [(pole\ no./2) - 1] \times pin\ spacing + 13.6\ mm$

Male connector, 713 Series, black

Convenient electrical installations are guaranteed with this male connector (item number 713-1477/107-000). The dimensions are (69.6 x 17.3 x 13.3) mm (width x height x depth).

The contact surface is coated with tin. THT is used to assemble the pcb connector.

Notes

Safety Information

The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

Variants:

Other pole numbers
Other solder pin lengths
Gold-plated or partially gold-plated contact surfaces
Other versions (or variants) can be requested from WAGO Sales or configured at <https://configurator.wago.com/>.

Electrical data

Ratings per	IEC/EN 60664-1			Approvals per	UL 1059		
Overvoltage category	III	III	II	Use group	B	C	D
Pollution degree	3	2	2	Rated voltage	150 V	50 V	-
Nominal voltage	80 V	160 V	250 V	Rated current	10 A	10 A	-
Rated impulse withstand voltage	2.5 kV	2.5 kV	2.5 kV				
Rated current	10 A	10 A	10 A				

Approvals per	CSA		
Use group	B	C	D
Rated voltage	150 V	-	-
Rated current	12 A	-	-

Connection Data

Total number of potentials	34	Connection 1	
Number of connection types	1	Pole number	34
Number of levels	2		

Physical data

Pin spacing	3.5 mm / 0.138 inches
Width	69.6 mm / 2.74 inches
Height	17.3 mm / 0.681 inches
Height from the surface	13.5 mm / 0.531 inches
Depth	13.3 mm / 0.524 inches
Solder pin length	3.8 mm
Solder pin dimensions	0.8 x 0.8 mm
Drilled hole diameter with tolerance	1.2 ^(+0.1) mm

Mechanical data

Variable coding	Yes
Anti-rotation protection	Yes

Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for PCB
Mismating protection	Yes
Mating direction to the PCB	90 °
Locking of plug-in connection	Threaded flange

PCB contact

PCB contact	THT
Solder pin arrangement	over the entire male connector (in-line)
Number of solder pins per potential	1

Material data

Note (material data)	Information on material specifications can be found here
Color	black
Material group	I
Insulation material (main housing)	Polyphthalamide (PPA GF)
Flammability class per UL94	V0
Contact material	Electrolytic copper (E _{Cu})
Contact Plating	Tin
Fire load	0.183 MJ
Weight	9.2 g

Environmental requirements

Limit temperature range	-60 ... +100 °C
Processing temperature	-35 ... +60 °C

Commercial data

Product Group	3 (Multi Conn. System)
PU (SPU)	20 pcs
Packaging type	Box
Country of origin	PL
GTIN	4045454809553
Customs tariff number	85366930000

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-04-02
eCl@ss 9.0	27-44-04-02
ETIM 9.0	EC002637
ETIM 10.0	EC002637
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	7220a0a3-71be-40db-ac0e-b7119f207a1d
SCIP notification number (Belgium)	4bda7315-aca5-4484-a670-5bcb972929c0
SCIP notification number (Bulgaria)	4dd243b1-d410-4c6a-a3e8-d7a545ab34db
SCIP notification number (Czech Republic)	8b05cbc3-a9ca-4358-b57a-f40c62beac15
SCIP notification number (Denmark)	2be433b7-2b26-4dc5-b177-be9bf3139ab8
SCIP notification number (Finland)	3cc0e8af-dc16-4ca1-bbc4-997a0cdf6f6c
SCIP notification number (France)	bcc530dc-9e3f-4ca1-aec7-595ca58626a7
SCIP notification number (Germany)	7f6b536a-ac22-4bad-bc77-8efa07206b04
SCIP notification number (Hungary)	8d4fa484-92e0-4cda-940c-1cab53c4418
SCIP notification number (Italy)	cdd288d8-9699-4787-a3e1-5f2287cd5eca
SCIP notification number (Netherlands)	cfca45b0-af2f-4c11-9875-c704681cb75b
SCIP notification number (Poland)	23b20419-35bd-4d8d-b6b8-10e3ead2eda6
SCIP notification number (Romania)	a6436f33-cab2-4965-965e-12d1cdb42c71
SCIP notification number (Sweden)	7026ea2d-14ad-4098-aaed-317cfbd8c8ef

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 61984	NL-102427
CSA CSA Group	C22.2	2315087
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-133740

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 713-1477/107-000	↓
------------------------------------------------------	---

Documentation

Additional Information

Technical Section	03.04.2019	pdf 2027.26 KB	↓
-------------------	------------	-------------------	---

CAD/CAE-Data

CAD data

2D/3D Models
713-1477/107-000

CAE data

ZUKEN Portal
713-1477/107-000

PCB Design

Symbol and Footprint
via SamacSys
713-1477/107-000Symbol and Footprint
via Ultra Librarian
713-1477/107-000

1 Compatible Products

1.1 System counterpart

1.1.1 Female connector/socket



Item No.: 713-1117/107-000

1-conductor female connector, 2-row; CA-GE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 34-pole; 100% protected against mismatching; Screw flange; black

1.2 Optional Accessories

1.2.1 Coding

1.2.1.1 Coding




Item No.: 714-101

Coding key; orange

Installation Notes

Coding



Coding a male header by inserting a coding pin.