

# Technical data sheet

## 15° Long support for PV module mounting, flat roof

Item number: 5901655



Long support to mount photovoltaic modules on flat roofs in combination with the TP 45/4700 support profile and KLU universal clamp. Slope angle 15°. Lockable fastening on support profile.



St

Steel

DD

Strip galvanised zinc/aluminium, Double Dip

### Master data

Item number	5901655
Type	STL 15 DD
Description 1	Long support
Description 2	for flat roof system
Manufacturer	OBO
Dimension	86x166x300
Colour	zinc
Material	Steel
Surface	Strip galvanised zinc/aluminium, Double Dip
Surface standard	DIN EN 10346
Smallest sales unit	4
Unit of quantity	Piece
Weight	210 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	6,8516 kg CO2e / 1 Piece


# Technical data sheet

## 15° Long support for PV module mounting, flat roof

Item number: 5901655



### Dimensions

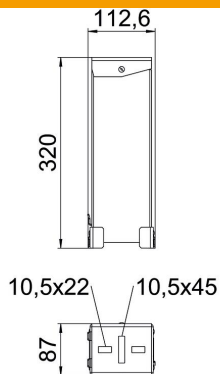

Length	164 mm
Width	87 mm
Height	340 mm

### Technical data

Angle of inclination, max.	15 °
Angle of inclination, min.	15 °
Depth	0 mm
Adjustable	yes
Photovoltaic connection and fastening element version	Other
Mounting type photovoltaic mounting systems	Flat roof
Torsion spring stiffness (k.rot.y)	0
Torsion spring stiffness (k.rot.z)	0