



### Features

- A ceiling recessed LED downlight IP44 (from the front) with phase dimmable driver, perfect where limited ceiling void is available with only 38mm product depth and 90mm cutout. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 830LM, 3000K, Driver Current: 250mA, CRI80, 80° beam angle, IP44 from the front, IK07, (HxW) 38x109mm, Class 2, 220-240V. Meets TP(a) requirements.

### Product Overview

Product name	START Downlight 90 IP44 830Lm 830 DIM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
E-number FI	4278448
Fixture luminous flux (lm)	830
Luminaire efficacy (lm/W)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	8.3
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9010 - Pure white
IP rating	IP44/20
IK rating	IK07

## START Downlight 90 IP44 830Lm 830 DIM 0030379


Product EAN number

5410288303796

Warranty

5 years

### Photometry

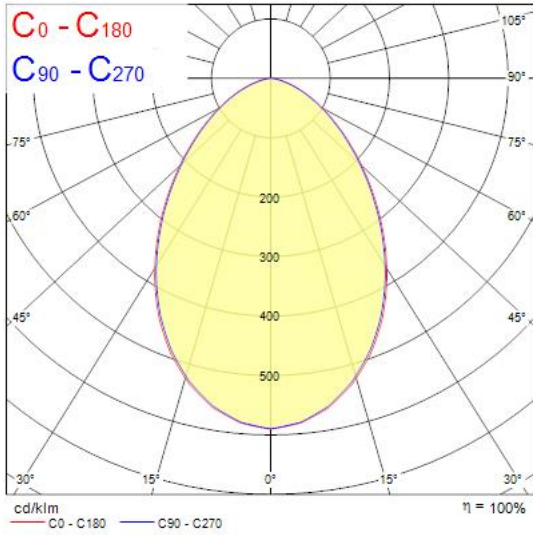

### Technical drawings

