

## Features

- GRADEO S 1500 830/835/840 is a modular high efficacy low glare surface and suspended LED Linear luminaire developed for education and seminar room environments. Optical solution: Micro Prismatic diffuser combined with lenses to provide homogeneous and high efficient light. Minimalist, robust body design, luminaire dimensions: 1580x205x53mm, white powder coated steel body (RAL9016) and plastic end caps. IP40, IK06 rating. 3-steps dip switch driver (250/300/350mA drive current) with integrated CCT switch options (3000/3500/4000K). CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency. 23-32W system power, 3100-4600lm luminous flux, up to 144lm/W system efficacy with 4000K CCT option in case of direct distribution, UGR<19 glare level. 3300-4900lm luminous flux, up to 152lm/W system efficacy with 4000K CCT option in case of direct/ indirect light distribution with Gradeo indirect modules, 80/20% D/I ratio. Luminance at 65° < 3000 cd/m<sup>2</sup>, lifespan: 100,000 hours L80B50, photobiological safety risk group 1. Electrical protection Class I.


## Product Overview

<b>Product name</b>	GRADEO S 1500 830/835/840
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling surface mounting, Suspended
<b>General application</b>	Education, Office
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4279685
<b>Fixture luminous flux (lm)</b>	4600

## GRADEO S 1500 830/835/840 0042742

Luminaire efficacy (lm/W)	144
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	85
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	32
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Housing colour	RAL9016
IP rating	IP40
IK rating	IK07
Product EAN number	5410288427423
Warranty	5 years
Dimming method	N/A

### Photometry

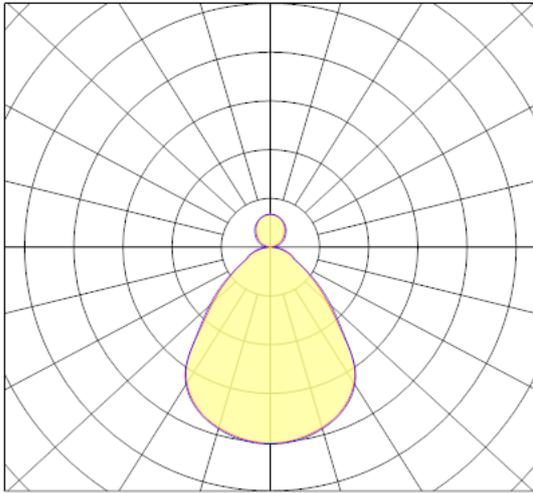

cd/klm  
— C0 - C180 — C90 - C270