

Concealed thermostat with one function volume control - Brushed Dark Platinum

SERIES SPECIFIC

36 425 970 Product version up to 8/24/2020



- cover plate Ø 150 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- WRAS

	Brushed Dark Platinum	36 425 970-99
	Chrome	36 425 970-00
	Brushed Platinum	36 425 970-06
	Platinum	36 425 970-08
	Dark Chrome	36 425 970-19
	Light Gold (PVD)	36 425 970-26
	Brushed Light Gold (PVD)	36 425 970-27
	Brushed Durabrass (23kt Gold)	36 425 970-28
	Matte Black	36 425 970-33
	Brushed Gold (PVD)	36 425 970-37
	Brushed Dark Brass (PVD)	36 425 970-39
	Brushed Bronze (PVD)	36 425 970-42
	Brushed Dark Bronze (PVD)	36 425 970-43
	Brushed Champagne (22kt Gold)	36 425 970-46
	Champagne (22kt Gold)	36 425 970-47
	Brushed Chrome	36 425 970-93

Required miscellaneous



Concealed thermostat - 35 425 970 90
 •min. recess depth 80 mm
 •max. recess depth 136 mm

Required miscellaneous



Concealed thermostat with built-in isolators - 35 426 970 90
 •min. recess depth 80 mm
 •max. recess depth 136 mm

Required miscellaneous




xGRID Installation track 555 mm - 12 360 970 90

Recommended miscellaneous




xGRID Attachment set for integrating in the dry wall construction - 12 340 970 90

36 425 970 Product version up to 8/24/2020
mm [inches]

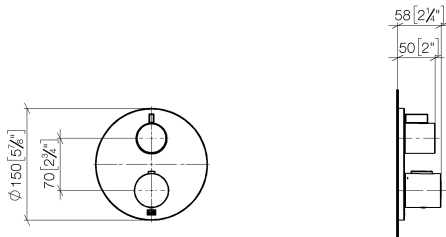

Flow rate chart

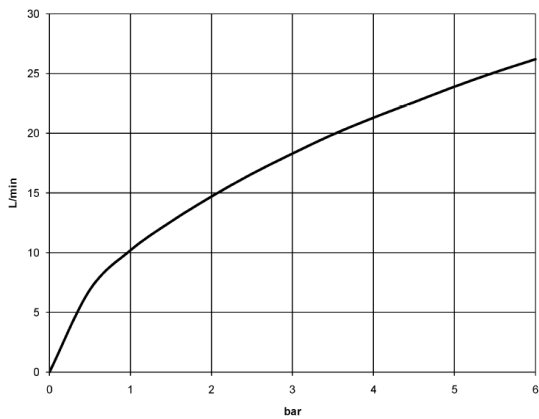

Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen

VA-Zeichen



Concealed thermostat with one function volume control - Brushed Dark
Platinum

SERIES SPECIFIC

36 425 970 Product version up to 8/24/2020

Certificates and sustainability

LGA_19

ETA_20

LGA_19

DVGW_DW-
6512DN0

WRAS_250402


EPD-DOR-20230287

-IBA1-EN

Environmental.prod

uct-declarat

36 425 970 Product version up to 8/24/2020

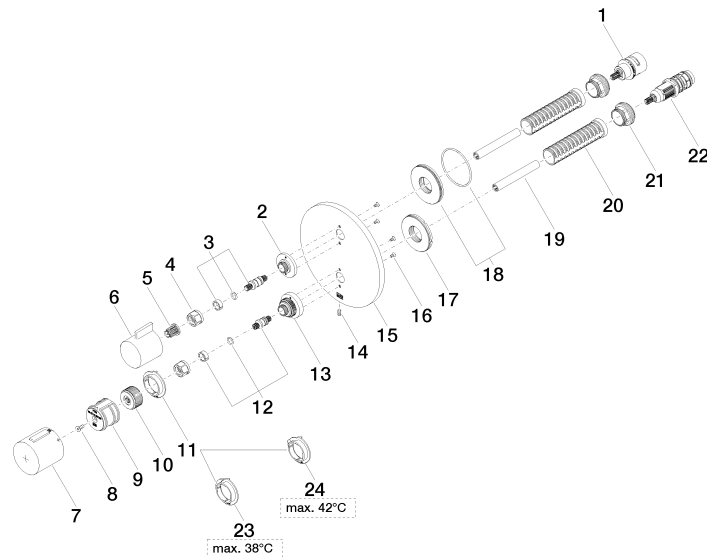

Concealed thermostat with one function volume control - Brushed Dark Platinum

SERIES SPECIFIC

36 425 970 Product version up to 8/24/2020

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	24 09 28 10 189 90	Temperature limitation ring Thermostat, black -	1.00	14
	20 90 18 40 077 01 90	Sleeve -	2.00	14
	5 90 12 12 002 00 90	Fixing cap white Ø 15 x 12 mm -	1.00	14
	15 09 11 02 242-99	Rosette Ø 150 x 9 mm - Brushed Dark Platinum	1.00	40
	12 04 29 06 024 01-00	Spindle with double toothing Ø 12,15 x 30 mm - Chrome	1.00	20
	23 09 28 10 188 90	Temperature limitation ring Thermostat, 38° stop -	1.00	14
	10 09 12 12 054 90	Handle mount Ø 28,50 x 16 mm -	1.00	14
	6 09 20 67 006-99	Handle for thermostat 41 x 40 x 53 mm - Brushed Dark Platinum	1.00	82
	22 90 15 02 013 00 90	Thermostat cartridge Ø 27 x 82 mm, 16-18 l/min. -	1.00	14
	18 90 30 01 190 00 90	Connection Ø 55 x 9 mm -	1.00	14
	17 09 30 01 296 90	Shaft M24x1 Ø52 external -	1.00	14
	1 90 90 03 166 00 90	Head part Temperature maintenance head part Lifetime 90° Motion -	1.00	14
	7 90 17 33 017 00-99	Handle Thermostat Ø48mm with marking - Brushed Dark Platinum	1.00	40
	3 04 29 06 111 01-00	Spindle with double toothing Ø 12,15 x 37,2 mm - Chrome	1.00	20
	4 90 23 30 023 00 90	Cap nut -	2.00	14
	21 09 24 04 257 90	Mounting Nut Ø 32 x 19,5 mm -	2.00	14
	11 09 28 10 187 90	Temperature limitation ring Thermostat -	1.00	14
	13 09 12 12 051-99	Fixing cap mount Ø 35 x 26,5 mm - Brushed Dark Platinum	1.00	40
	9 90 12 12 052 00 90	Retainer -	1.00	14
	16 09 30 30 157 90	Mounting Countersunk screw with hexagon socket M3 x 6 mm -	4.00	14
	19 90 23 01 124 00 90	Sleeve -	2.00	14
	14 09 31 11 134 90	Mounting Threaded pin with hexagon socket with point M4 x 10 mm -	1.00	14
	8 90 30 30 124 00 90	Mounting Countersunk screw with hexagon socket M4 x 10 mm -	1.00	14
	2 09 12 12 053-99	Fixing cap mount Ø 34,5 x 15 mm - Brushed Dark Platinum	1.00	40