




### Features

- LED T5 replacement batten, seamless linking (up to 10M), ideal for direct lighting such as under cabinet or in kitchens, 120 degree beam angle, includes switch, includes 0.30m stripped cable, white polycarbonate body, includes standard and tilting brackets


### Product Overview

Product name	LED PIPE L300 WW
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
E-number FI	4278203
Fixture luminous flux (lm)	350
Luminaire efficacy (lm/W)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Photobiological Risk Group	RG0
Total power consumption (W)	3.5
Electrical protection	Class II
Control gear type	LED driver constant current
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288513614
Warranty	3 years

### Photometry

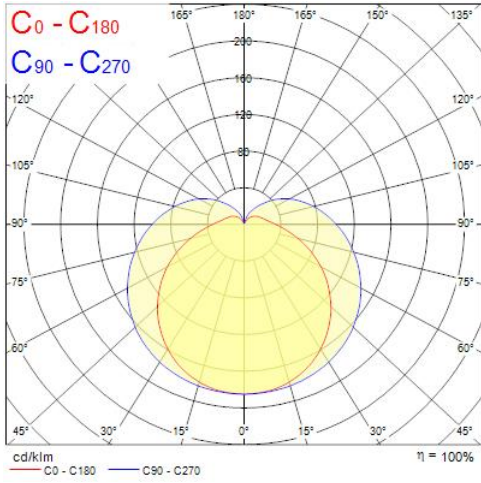

### Technical drawings

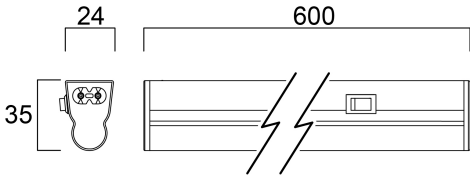

### Data table

#### GENERAL DATA

Product name

LED PIPE L300 WW

## LED PIPE L300 WW 0051361

Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
E-number FI	4278203
Warranty	3 years

### OPTICAL DATA

Fixture luminous flux (lm)	350
Luminaire efficacy (lm/W)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Photobiological Risk Group	RG0

### ELECTRICAL DATA

Total power consumption (W)	3.5
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.5
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	50
Inrush Current (A)	5
Inrush Duration (µs)	120
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	266
Max. products per 20A B Breaker	320

## LED PIPE L300 WW 0051361

Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5
--	-----

### LIFETIME DATA

Lifespan L70 B50	30000
------------------	-------

### PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	300
Nominal Product Width (mm)	24
Weight (kg)	0.043

### PACKAGING

Single packaging type	Carton
Product EAN number	5410288513614
Packaging single width (cm)	4.6
Packaging single depth (cm)	3.1
DUN14 (outer)	15410288513611
Packaging outer length / height (cm)	32.0

### SAFETY DATA

Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No