



### Features

- Exterior LED Floodlight, comes complete with 1000mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, integrated anti-condensation valve, IP66, IK08, Class I, 3000K, CRI80, DALI dimmable, 3000lm, 23W, 130lm/W, Asymmetrical Wide beam, 100.000hrs L80B50 lifespan, 331 x 237 x 68mm (LxWxD) dimensions, 2.4kg weight, RAL9017 Traffic Black color.


### Product Overview

Product name	Kalani IP66 3KLM 830 ASYM DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Other
General application	Logistics & Industry
ETIM Class	EC001744
Fixture luminous flux (lm)	3000
Luminaire efficacy (lm/W)	130
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	65x120
Photobiological Risk Group	RG1
Total power consumption (W)	23
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
LED Flickering Rate	Low (6% - 20%)

## Kalani IP66 3KLM 830 ASYM DALI 0056805

Housing colour	RAL 9017 - Traffic black
IP rating	IP66
IK rating	IK08
Product EAN number	5410288568058
Warranty	5 years
Dimming method	DALI-2
Useful luminous flux (#use)	3000

### Photometry

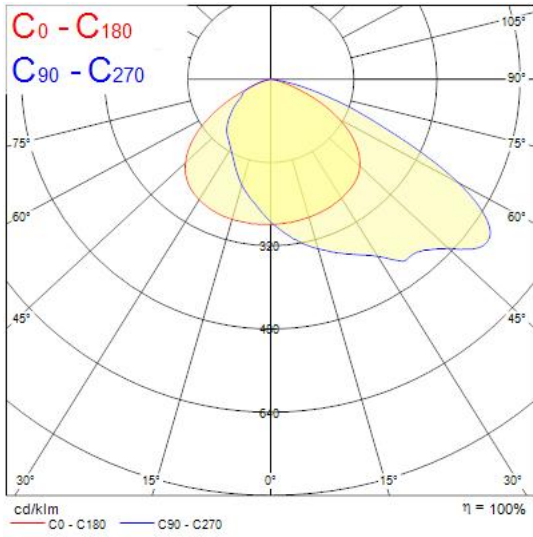

### Technical drawings

