Insaver Slim UGR19 IP44 175 wide bezel 1050lm 830
0030442

Features

• Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 9W; 1050lm; 117lm/W; 3000K; UGR <19 with shallow product depth 50mm. The bezel matches the look of PIR version (SKUs 0030320, 0030321). Meets TP(a) requirements.

Product Overview

Product name	Insaver Slim UGR19 IP44 175 wide bezel 1050lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
E-number FI	4278409
Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	117
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	9
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20

Light your world

© Feilo Sylvania | Date Printed:05.02.2024

Insaver Slim UGR19 IP44 175 wide bezel 1050lm 830
0030442

IK rating	IK07
Product EAN number	5410288304427
Warranty	5 years

Photometry

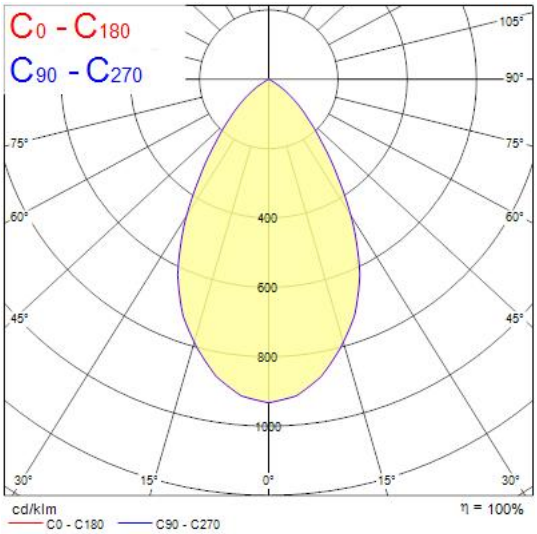

Technical drawings

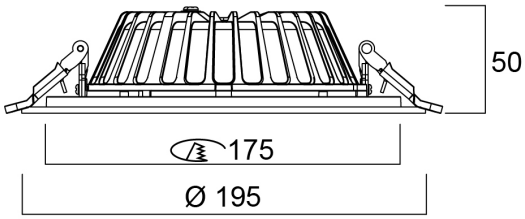

Light your world

© Feilo Sylvania | Date Printed:05.02.2024