

LED PIPE L1500 HIGH OUTPUT WW 0051375



Features


- LED T5 replacement batten, high output range: more lumens per meter with efficiency up to 125 lum/watt, seamless linking (up to 10M), ideal for direct lighting such as under cabinet or in kitchens, 120 degree beam angle, includes switch, includes 0.30m stripped cable, white polycarbonate body, includes standard and tilting brackets

Product Overview


Product name	LED PIPE L1500 HIGH OUTPUT WW
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
E-number FI	4278220
Fixture luminous flux (lm)	2175
Luminaire efficacy (lm/W)	114
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Photobiological Risk Group	RG0
Total power consumption (W)	19
Electrical protection	Class II
Control gear type	LED driver constant current
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288513751
Warranty	3 years

LED PIPE L1500 HIGH OUTPUT WW 0051375

Photometry

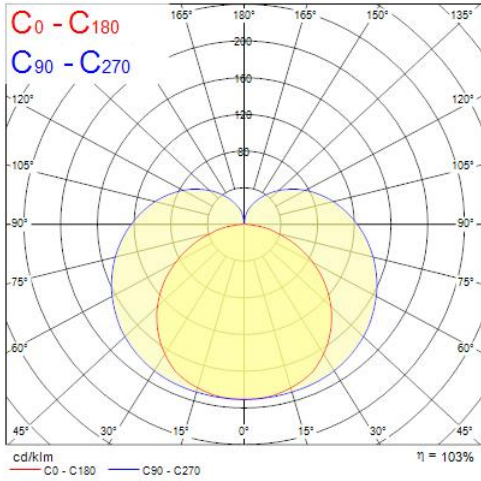

Technical drawings

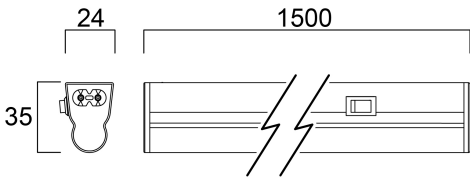

Data table

GENERAL DATA

Product name

LED PIPE L1500 HIGH OUTPUT WW

LED PIPE L1500 HIGH OUTPUT WW 0051375

Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
E-number FI	4278220
Warranty	3 years

OPTICAL DATA

Fixture luminous flux (lm)	2175
Luminaire efficacy (lm/W)	114
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	19
Lamp power factor	0.7
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	150
Inrush Current (A)	100
Inrush Duration (µs)	150
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	69
Max. products per 20A B Breaker	82
Connectable conductor cross section - Max (mm²)	1.5

LED PIPE L1500 HIGH OUTPUT WW 0051375

LIFETIME DATA

Lifespan L70 B50	30000
------------------	-------

PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1500
Nominal Product Width (mm)	24
Weight (kg)	0.213

PACKAGING

Single packaging type	Carton
Product EAN number	5410288513751
Packaging single width (cm)	4.6
Packaging single depth (cm)	3.1
DUN14 (outer)	15410288513758
Packaging outer length / height (cm)	152.0

SAFETY DATA

Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No