



Features

- 5 metre IP65 LED reel with pre-attached 3M adhesive type; equipped with 400 LEDs; 8250lm per 5m (1650lm per 1m); 24V; 3000K; CRI90; R9>50; SDCM≤3;Compatible with emergency packs: 0046600, 0046601


Product Overview

Product name	Flex Pro IP65 8250lm 930
Technology	LED
General application	Hospitality
ETIM Class	EC002706
E-number FI	4278339
Fixture luminous flux (lm)	8250
Luminaire efficacy (lm/W)	113
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Photobiological Risk Group	RG1
Power consumption (W)	72
Total power consumption (W)	72
Electrical protection	Class III
Dimmable	Yes
Housing colour	Transparent
IP rating	IP65
IK rating	IK00
Product EAN number	5410288681887
Warranty	5 years
Dimming method	Other


Flex Pro IP65 8250lm 930
0068188

Useful luminous flux (#use)	8250
-----------------------------	------

Photometry

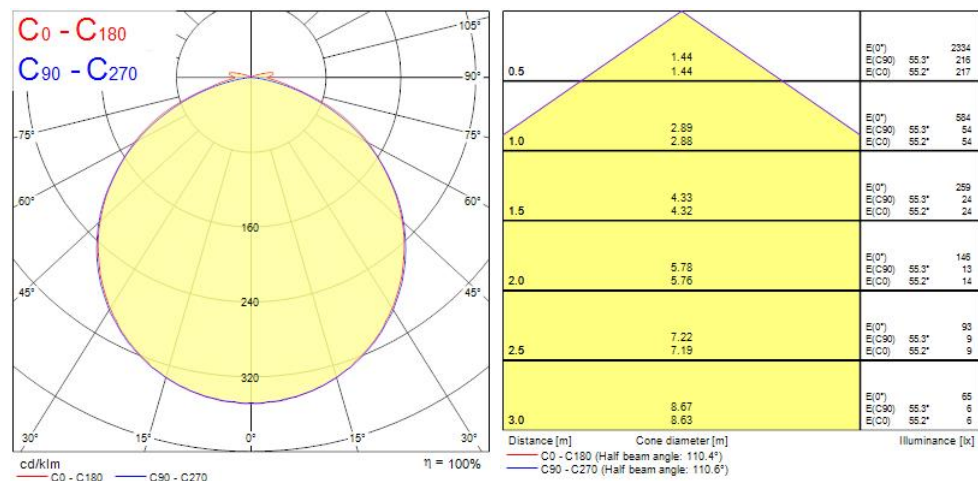

Technical drawings

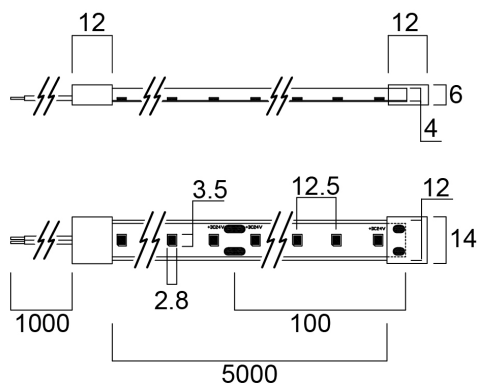

Data table

GENERAL DATA

Flex Pro IP65 8250lm 930 0068188

Product name	Flex Pro IP65 8250lm 930
Technology	LED
General application	Hospitality
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002706
E-number FI	4278339
Warranty	5 years

OPTICAL DATA

Useful luminous flux (#use)	8250
Fixture luminous flux (lm)	8250
Luminaire efficacy (lm/W)	113
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Photobiological Risk Group	RG1

ELECTRICAL DATA

Power consumption (W)	72
Total power consumption (W)	72
Primary Supply/Product voltage - min (V)	24
Primary Supply/Product voltage - max (V)	24
Electrical protection	Class III
Control gear required	Yes
Dimmable	Yes
Dimming method	Other
Drive current (mA)	3000
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	DC



Flex Pro IP65 8250lm 930
0068188

LIFETIME DATA

Lifespan L70 B50	54000
Lifespan L70 B10	54000
Lifespan L80 B10	50000
Lifespan L90 B10	44000

PHYSICAL DATA

Housing colour	Transparent
IP rating	IP65
IK rating	IK00
Nominal Product Length (mm)	5000
Nominal Product Width (mm)	12
Nominal Product Height (mm)	4
Weight (kg)	0.2

PACKAGING


Product EAN number	5410288681887
Packaging single length / height (cm)	23.5
Packaging single width (cm)	22.5
Packaging single depth (cm)	3.0
DUN14 (inner)	15410288681884
Units per outer package	20
Packaging outer length / height (cm)	49.0
Packaging outer width (cm)	35.0
Packaging outer depth (cm)	24.0

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No

Energy label

**ENERG**
SYLVANIA
0068188

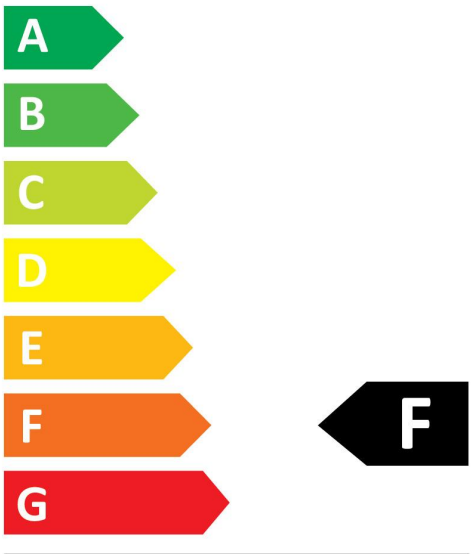


72
kWh/1000h



2019/2015

**ENERG**
SYLVANIA
0068188

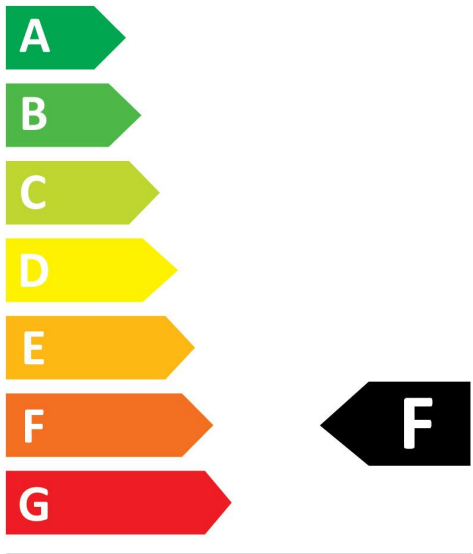

72
kWh/1000h



2019/2015