


SYLPIPE HIGH OUTPUT LED PIPE L600 HIGH OUTPUT NW 0051377

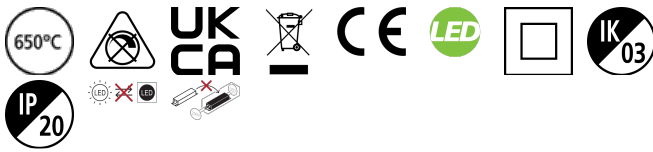

PRODUCT OVERVIEW

Product name	LED PIPE L600 HIGH OUTPUT NW
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
E-number FI	4278222
Warranty	3 years
Fixture luminous flux (lm)	1000
Luminaire efficacy (lm/W)	125
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG0
Total power consumption (W)	8
Electrical protection	Class II
Control gear type	LED driver constant current
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288513775

DATA TABLE

General data

Product name	LED PIPE L600 HIGH OUTPUT NW
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
E-number FI	4278222
Warranty	3 years

SYLPIPE HIGH OUTPUT LED PIPE L600 HIGH OUTPUT NW 0051377

Optical data

Fixture luminous flux (lm)	1000
Luminaire efficacy (lm/W)	125
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	8
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.5
Electrical protection	Class II
Control gear type	LED driver constant current
Drive current (mA)	100
Inrush Current (A)	100
Inrush Duration (µs)	150
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	164
Max. products per 20A B Breaker	197
Connectable conductor cross section - Max (mm ²)	1.5

Lifetime data

Lifespan L70 B50	30000
------------------	-------

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	600
Nominal Product Width (mm)	24
Weight (kg)	0.085

Packaging


Single packaging type	Carton
Product EAN number	5410288513775
Packaging single width (cm)	4.6
Packaging single depth (cm)	3.1
DUN14 (outer)	15410288513772
Packaging outer length / height (cm)	62.0

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

SYLPIPE HIGH OUTPUT LED PIPE L600 HIGH OUTPUT NW 0051377

PHOTOMETRY

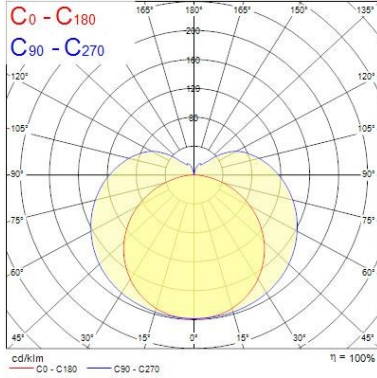

TECHNICAL DRAWINGS

