



Features

- 5 metre IP65 LED reel with pre-attached 3M adhesive type; equipped with 300 LEDs; 2750lm per 5m (550lm per 1m); 24V; 4000K; CRI80; SDCM ≤3; Compatible with emergency packs: 0046600, 0046601


Product Overview

Product name	START Flex IP65 840 2750lm
Technology	LED
Mount	Other
General application	Hospitality, Retail
ETIM Class	EC002706
E-number FI	4276598
Fixture luminous flux (lm)	2750
Luminaire efficacy (lm/W)	115
Correlated colour temperature (k)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Beam Angle (°)	N/A
Photobiological Risk Group	RG1
Power consumption (W)	24
Total power consumption (W)	24
Electrical protection	Class III
Dimmable	Yes
Housing colour	Beige
IP rating	IP65
IK rating	IK00
Product EAN number	5410288681283


START Flex IP65 840 2750lm
0068128

Warranty	5 years
Dimming method	Other
Useful luminous flux (#use)	2750

Photometry

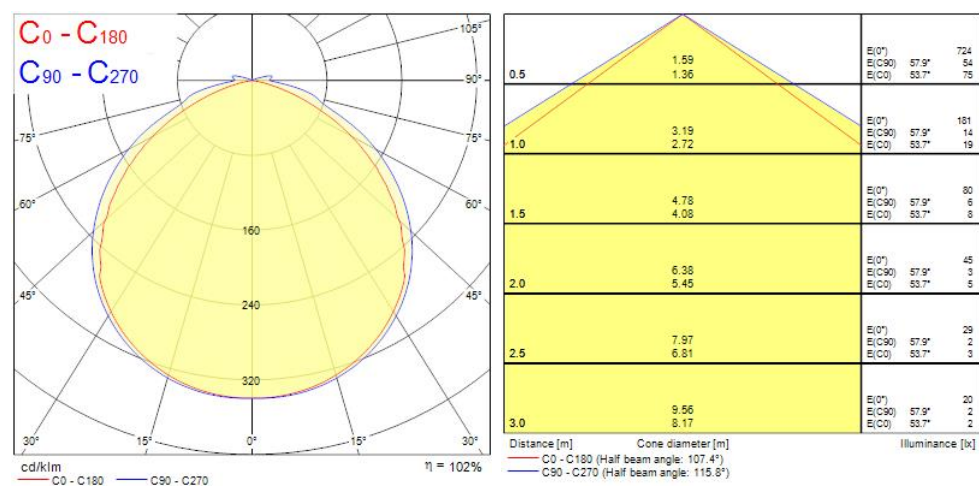

Technical drawings

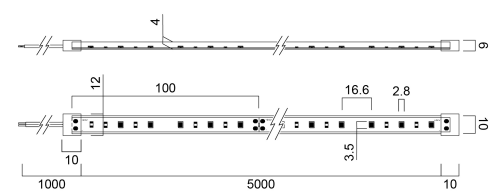

Data table

GENERAL DATA

Product name	START Flex IP65 840 2750lm
Technology	LED
Mount	Other

START Flex IP65 840 2750lm 0068128

General application	Hospitality, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002706
E-number FI	4276598
Warranty	5 years

OPTICAL DATA

Useful luminous flux (#use)	2750
Fixture luminous flux (lm)	2750
Luminaire efficacy (lm/W)	115
Correlated colour temperature (k)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	120
Beam Angle (°)	N/A
Photobiological Risk Group	RG1

ELECTRICAL DATA

Power consumption (W)	24
Total power consumption (W)	24
Primary Supply/Product voltage - min (V)	24
Primary Supply/Product voltage - max (V)	24
Electrical protection	Class III
Control gear required	Yes
Dimmable	Yes
Dimming method	Other
Drive current (mA)	1000
Lamp Energy Label (class)	F

LIFETIME DATA

Lifespan L70 B50	54000
Lifespan L70 B10	54000

START Flex IP65 840 2750lm 0068128

Lifespan L80 B10	50000
Lifespan L90 B10	44000

PHYSICAL DATA

Housing colour	Beige
IP rating	IP65
IK rating	IK00
Nominal Product Length (mm)	5000
Nominal Product Width (mm)	10
Nominal Product Height (mm)	4
Weight (kg)	0.3

PACKAGING

Product EAN number	5410288681283
Packaging single length / height (cm)	23.5
Packaging single width (cm)	22.5
Packaging single depth (cm)	3.0
DUN14 (inner)	15410288681280
Units per outer package	20
Packaging outer length / height (cm)	49.0
Packaging outer width (cm)	34.0
Packaging outer depth (cm)	24.0

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No

Energy label



0068128




24
kWh/1000h



2019/2015



0068128

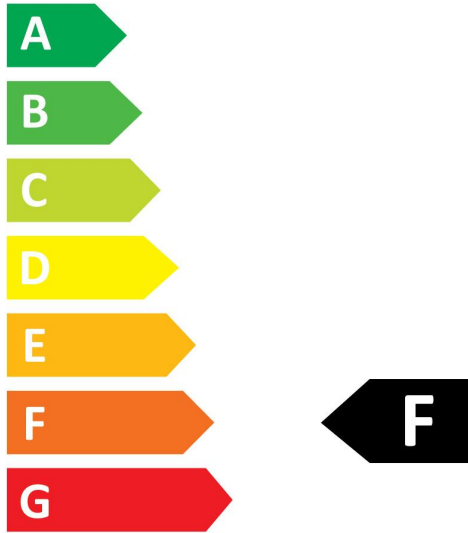

24
kWh/1000h



2019/2015