


Panel IP66 CR R 1200 Helder 40W 3973lm 940 UGR DALI EM

Artikelnummer 0042019

SYLVANIA

LiteGuard™

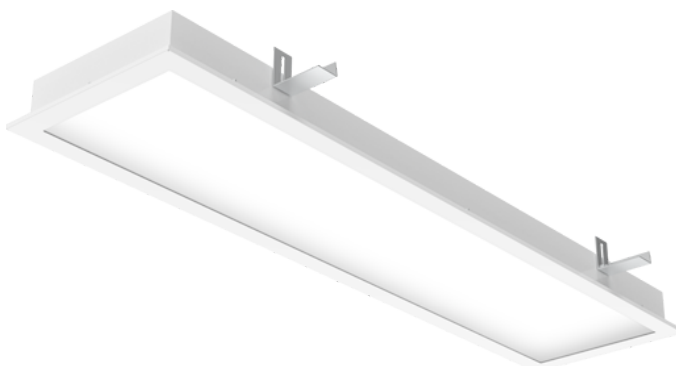

PANEL IP66 CR R 598R CMPG L3 3750LM 940 DALI EM is a recessed LED lighting fixture designed for clean areas in hospitals, laboratories, microelectronics production, food industry, clean screwless design for easy cleaning with rounded edges of the frame eliminates the sediments and bacteriums creation, powder coated steel body with white finishing (RAL9016), diffuser made of clear tempered safety glass and MP plexiglass, 1198x298x79mm luminaire dimensions, 3750lm luminous flux, 37W system power, 101lm/W efficacy, power consumption in EM mode 3.8W & 340lm luminous flux, CRI Ra>90 4000K CCT light source, suitable for ambient temperatures from -20°C up to 60°C, lifespan: L80B10 70000h @Ta 30°C, L70B10 100000hr @ Ta 30°C, certified for clean areas in compliance with ISO 14644-1 class 2-9, minimum height of mounting space is 200 mm, electrical connection by means of ADELS connector, maximum cross section of wires 2,5 mm², impact protection IK08, ingress protection rating IP66/IP50 upper side of the luminaire, electrical protection Class I, DALI dimmable driver, 3-hours integrated EM, 5 years warranty, UGR<19.

Panel IP66 CR R 1200 Helder 40W 3973lm 940 UGR DALI EM

Artikelnummer 0042019

SYLVANIA

Elektrische gegevens

Nood type	
Nood duur (u)	3
Totaal energieverbruik (W)	37
Primaire voedingsspanning min	240.0
Primaire voedingsspanning max	220.0
Lamp arbeidsfactor	0.98
THD (bij 230 V, 50 Hz, volledige belasting, bij 100% dimniveau) ≤ xx.x %	9
Elektrische beschermingsklasse	Klasse 1
Type ballast	LED constante stroom driver
Dimbaar	Ja
Dimtechnologie	DALI-2
Inschakelstroom (A)	22.4
Duur inschakelstroom (µs)	176
Energie-efficiëntieklasse (A->G) van de lichtbron in dit product	C
Nominale frequentie (Hz)	50/60Hz
Max. Armaturen per 10A C automaat	21
Max. Armaturen per 16A C automaat	36
Max. Armaturen per 16A B automaat	22
Aansluitbare geleider doorsnede min	0.5
Aansluitbare geleider doorsnede max	2.5

Gegevens levensduur

Gemiddelde nominale levensduur - L70 B50	100000
--	--------

Fysieke gegevens

Kleur behuizing	RAL 9016 - Traffic white / Bezel
IP waarde	IP66
IK waarde	IK08
Afwerking diffusor	Prismatisch
Materiaal diffusor	Gehard veiligheidsglas
Lengte (mm)	1198
Breedte (mm)	298
Hoogte (mm)	79
Gewicht (kg)	12.0

Verpakkingen

EAN code	5410288420196
Enkele lengte verpakking (cm)	127.5
Enkele breedte verpakking (cm)	34.0
Hoogte eenheidsverpakking (cm)	9.5
DUN14 (inner)	05410288420196
Eenheden per omdoos	1
Lengte omdoos (cm)	127.5
Breedte omdoos (cm)	34.0
Diepte omdoos (cm)	9.5

Veiligheidsgegevens

Gloeidraad test (°)	850
Optimale bedrijfsomstandigheden (°C)	5-35