


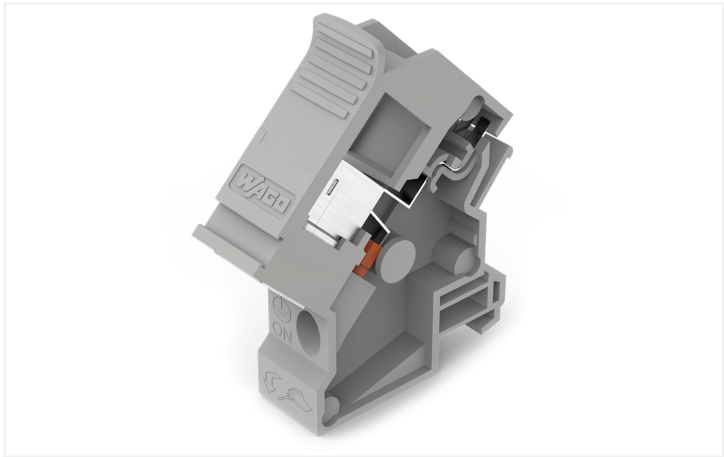

Electrical data	
Contact resistance (max.)	5 mΩ
Specialty functions	With shield connection

Safety and protection	
Protection type	IP20

Connection Data			
Mating cycles	750	Connection 1	
Connection Cable	Cat. 6A (min.)	Pluggable connector	RJ-45 (shielded)
		Pole number 1	8
		Connection type	System

Connection 2	
Pole number	8
Connection type	System
Connection technology	IDC connection
Solid conductor	0.4 ... 0.65 mm² / 26 ... 22 AWG
Stranded conductor	0.4 ... 0.65 mm² / 26/7 ... 22/7 AWG
Strip length	4.5 ... 9.6 mm / 0.18 ... 0.38 inches



Physical data	
Width	18 mm / 0.709 inches
Height	90 mm / 3.543 inches
Depth from upper-edge of DIN-rail	59 mm / 2.323 inches

Mechanical data	
Mounting type	DIN-35 rail
Housing design	Mounting carrier
Mating cycles	750

Material data	
Contact material (connector)	CuSn
Fire load	0 MJ
Weight	39 g

Environmental requirements	
Ambient temperature (operation)	-10 ... +60 °C
Ambient temperature (storage)	-40 ... +70 °C
Relative humidity	≤ 95 % (non-condensing)

Commercial data	
PU (SPU)	1 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4066966083484
Customs tariff number	85366990990

Product Classification	
UNSPSC	39121413
ETIM 9.0	EC002780
ETIM 10.0	EC002780
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

Approvals for marine applications



Approval	Standard	Certificate Name
DNV DNV Germany GmbH	DNV-CG-0339,Aug.2021	TAE00004KF



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 289-197

↓

Documentation

Bid Text

289-197

docx

14.97 KB

↓

289-197

xml

3.97 KB

↓

ausschreiben.de 289-197

↓

Instruction Leaflet

Übergabemodul; RJ-45; Schneidklemmtechnik; Cat. 6A;

12.2019

11.05.2023

pdf

295.40 KB

↓

Übergabemodul; RJ-45; Schneidklemmtechnik; Cat. 6A;

11.05.2023

png

170.36 KB

↓

CAD/CAE-Data

CAD data

2D/3D Models 289-197

↓

CAE data

EPLAN Data Portal 289-197

↓