


Walraven RapidStrut® Slide Nut (zp)

(H2420)

to connect construction parts to the rail

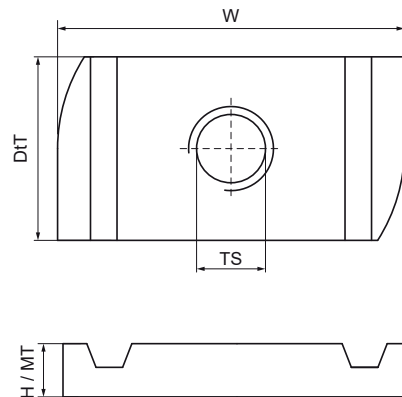

Features & benefits

- material: steel 1.0332
- zinc plated
- M10 & M12 tested for fire safety according to EN 1366-1.
- Tested values in combination with BIS RapidStrut® Rail 41x41x2.5mm.



Product Number	VVS Number	For Rail Type	Thread Size	Material Thickness	Torque Moment For Installation	Maximum Allowed Load Fax	Maximum Allowed Load Faz	Total Height	Total Width	Total Depth
Reference Letter			TS	MT	T _{inst.}	F _{a,x}	F _{a,z}	H	W	DtT
Unit description				mm	Nm	N	N	mm	mm	mm
6517006	18043606	41x21, 41x41, 41x51, 41x62, 41x82	M6	5.00	7	950	2,660	5	34	19
6517008	18043608	41x21, 41x41, 41x51, 41x62, 41x82	M8	6.00	25	2,200	4,500	6	34	19
6517010	18043610	41x21, 41x41, 41x51, 41x62, 41x82	M10	8.00	40	2,550	5,000	8	34	19
6517012	18043612	41x21, 41x41, 41x51, 41x62, 41x82	M12	9.00	50	2,950	5,000	9	34	19