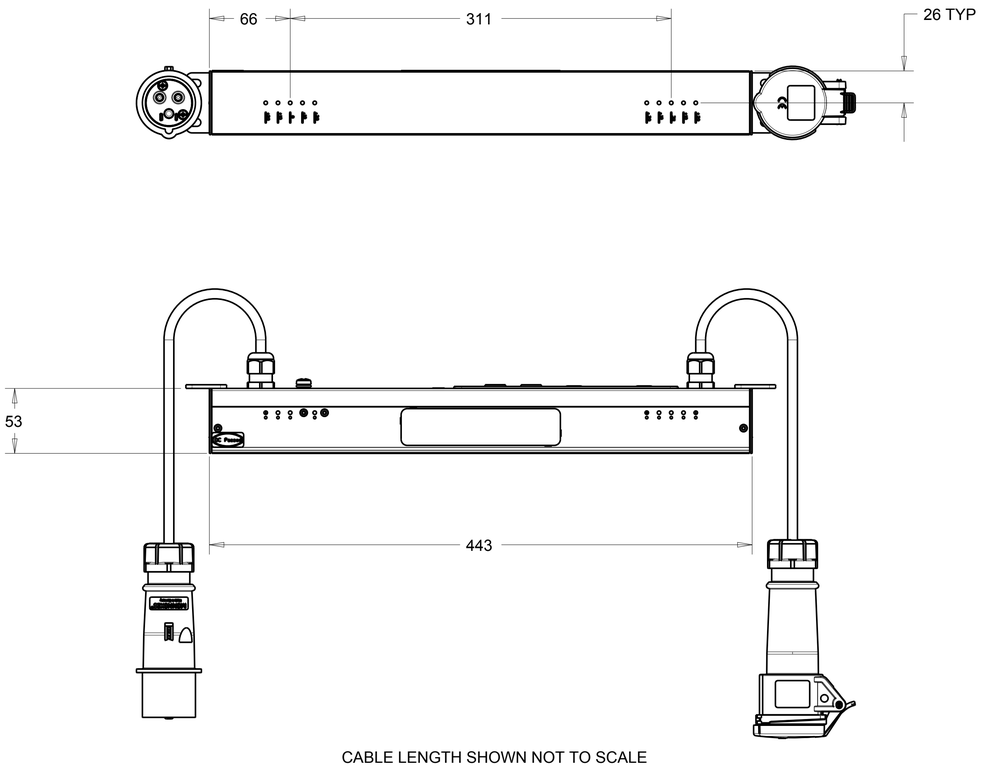

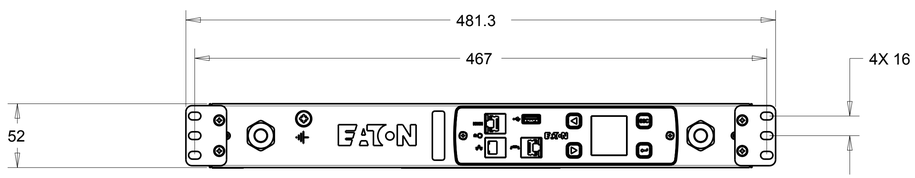

EILB13	G3+ INLINE METERED		
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
CURRENT POWER AND ENERGY METERING	IEC 60309-2 16A 230V~ W+N+PE (M) 1.5MM HO5 POWER CORD CABLE LENGTH: 3.0 M	IEC 60309-2 16A 230V~ W+N+PE (F) 1.5MM HO5 POWER CORD CABLE LENGTH: 3.0 M	0 TO 60° C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 443 MM WIDTH: 52 MM DEPTH: 53MM ALUMINIUM CHASSIS, BLACK MNT PATTERN SK-23919-Y1	1Ø; 200-240V~;W+N+PE 50/60HZ 16A	1Ø; 200-240V~;W+N+PE 50/60HZ 16A	CE, CB
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
NONE	NONE	STANDARD KSP016 - EMEA HOR INSTALL NETWORK PACK OPTIONAL EMPDT1H1C2 - ENVIRONMENTAL PROBE	EIL3CEHFAAA71AM



PICTORIAL VIEW
SCALE 0.200

REV.	MODIFICATION	DATE	DESS/DRAW	VERIF.
-	-	-	-	-
03	VIEW WITH NEW BRACKET	26.07.2017	VV	MB
02	REVISED DIMENSIONS FOR MOUNTING BRACKETS.	09.06.2015	G.McD.	M.B.
01	REVISED TO FIX GRAPHICS.	21.05.2014	G.McD.	M.B.
00	INITIAL RELEASE.	06.03.2014	-	M.B.

EATON

HEINEMANN PRODUCTS
CH-1345 LE LIEU SWITZERLAND

VUE/VIEW EUROPE | ECHELLE / SCALE 4/10 | N° MAG EILB13
DESSINE LE / DRAWED THE 06.03.2014
PAR / BY
VERIFIE PAR / VERIFIED BY M.B.

TOLERANCE GENERALE / GENERAL TOLERANCE
TRAITEMENT / FINISH NA
MATIERE / MATERIAL NA
NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT X
DIMENSIONS AND TOLERANCES IN MILLIMETERS

DESIGNATION: EPDU IL 0U (309 16A 1P)1X309
NUMERO DU PLAN / PLAN NUMBER: SK-30919-Y1
REV.: 03

COTES A CONTROLER / INSPECTION DIMENSIONS XX.XX
COTES FONCTIONNELLES / FUNCTIONAL DIMENSIONS # XX.XX

Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation.
This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.