

# Concord

## OPTIX RECESSED 600 4L LUMI HCL TW ALU SSC 2023880



### Features

- OPTIX RECESSED 600 4L LUMI HCL TW ALU SSC is a ceiling recessed luminaire for office and education applications with Aluminised plastic extra low glare optics and RAL9016 colour fixture body. SylSmart Standalone controlled tunable white light engine. 2700-6200K Tunable White LED, chromaticity tolerance of 3-step MacAdam ellipse. For 2700K - Colour rendering index Ra >98; Melanopic Ratio MEER: 0.528; Fidelity Index R#: 97; Gamut Index R#: 101. For 4000K - Colour rendering index Ra >96; Melanopic Ratio MEER: 0.822; Fidelity Index R#: 95; Gamut Index R#: 101. For 6200K - Colour rendering index Ra >99; Melanopic Ratio MEER: 1.077; Fidelity Index R#: 96; Gamut Index R#: 99. For 4000K luminous flux: 4350lm. Power consumption: 46W. Luminaire efficacy: 95lm/W. UGR<16 Luminance at 65°<200 Cd/m<sup>2</sup>, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C. 68,000hrs L80B20 lifespan.

### Product Overview


Product name	OPTIX RECESSED 600 4L LUMI HCL TW ALU SSC
Technology	LED LumiNature
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	4350
Luminaire efficacy (lm/W)	95
Correlated colour temperature (k)	4000
Light colour	Tuneable White HCL
CRI (Ra)	96

# Concord

## OPTIX RECESSED 600 4L LUMI HCL TW ALU SSC 2023880

Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	46
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768238804
Warranty	5 years
Dimming method	SylSmart SSC

### Photometry

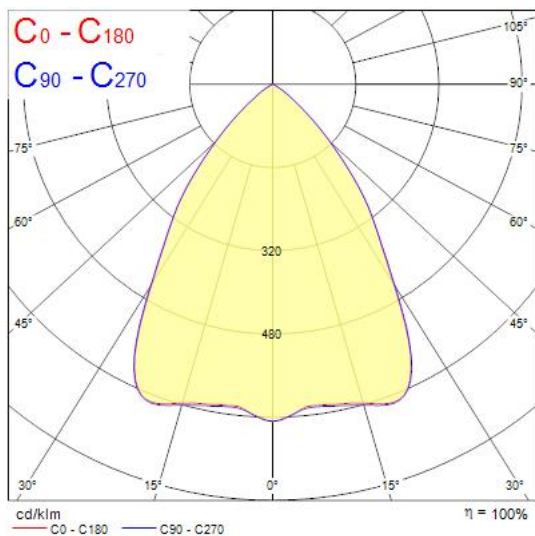

### Technical drawings

