




Features

- 5 metre high output neutral white IP65 silicon sleeved LED reel supplied with 25 x 200mm clear polycarbonate mounting strips which is pre-attached with 3M adhesive tape and 10 end caps, 7020 lumens, 82W, 86lm/W, 24V, 4000K, IP65, 40,000hrs (L70), (LxWxD) 5000x14x4mm


Product Overview

Product name	LumiStrip HO IP65 5M NW
Technology	LED
Housing	Other
Environment	Internal/External
General application	Hospitality, Residential & Consumer, Retail
ETIM Class	EC002706
E-number FI	4271153
E-number SE	7503265
Fixture luminous flux (lm)	7020 (1404/metre)
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	120
Total power consumption (W)	82
Electrical protection	Class III
IP rating	IP65
Product EAN number	8711971369752
Warranty	5 years

Photometry

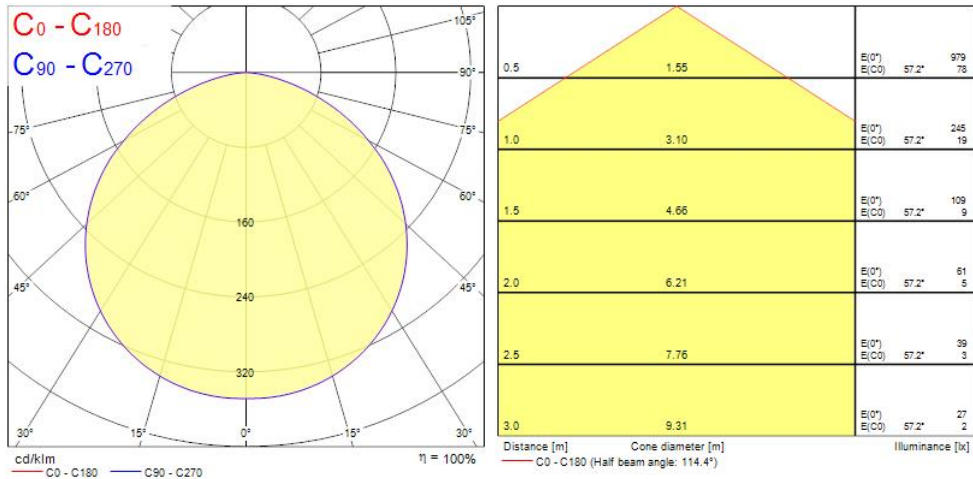

Technical drawings

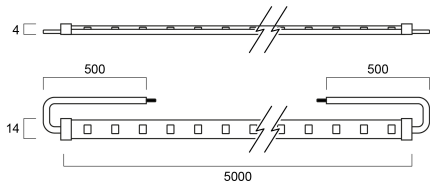

Data table

GENERAL DATA

Product name	LumiStrip HO IP65 5M NW
Technology	LED
Housing	Other
Environment	Internal/External
General application	Hospitality, Residential & Consumer, Retail
Operating temperature range (°C)	-25°C...+50°C



LumiStrip HO IP65 5M NW
3036975

ETIM Class	EC002706
E-number FI	4271153
E-number SE	7503265
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	7020 (1404/metre)
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	120

ELECTRICAL DATA

Total power consumption (W)	82
Primary Supply/Product voltage - min (V)	24
Primary Supply/Product voltage - max (V)	24
Electrical protection	Class III
Control gear required	No

PHYSICAL DATA

IP rating	IP65
Diffuser finish	Transparent
Diffuser material	Silicone
Nominal Product Length (mm)	5000
Nominal Product Width (mm)	14
Nominal Product Height (mm)	4
Weight (kg)	0.535

PACKAGING

Product EAN number	8711971369752
--------------------	---------------

LumiStrip HO IP65 5M NW
3036975

Packaging single length / height (cm)	27.37
Packaging single width (cm)	22.7
Packaging single depth (cm)	4.5
DUN14 (inner)	18711971369759
Units per outer package	9
Packaging outer length / height (cm)	42.9
Packaging outer width (cm)	26.4
Packaging outer depth (cm)	30.6

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-25-50
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No