

27 808 980 Product version up to 6/3/2020



- COMPACT RAIN, max. flow rate 15 l/min (at 3 bar)
- 3/8" shower outlet
- metal shower hose 1250mm with integrated anti-twist protection
- with anti-scale system

Technical data:

- rosette for shower holder 60 x 60mm
- rosette for wall elbow 60 x 60mm
- 1/2" wall elbow

Notes:

Intrinsic protection against back flow.

Recommended miscellaneous




Concealed wall elbow -

- min. recess depth 90 mm
- max. recess depth 163 mm


35 085 970 90

27 808 980 Product version up to 6/3/2020

mm [inches]

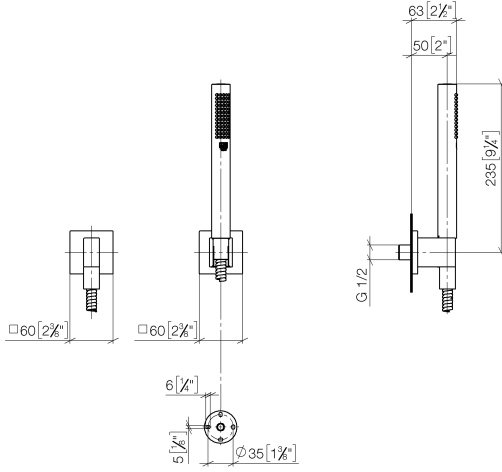

Flow rate chart

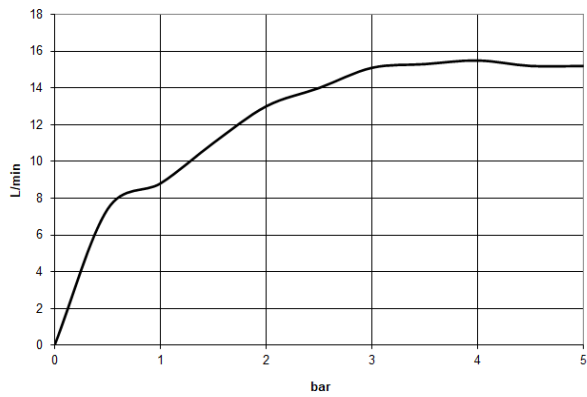

Codes & Standards

DIN 4109

EN 1717

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Hand shower set with individual rosettes - Brushed Durabrass (23kt Gold)


SERIES SPECIFIC

27 808 980 Product version up to 6/3/2020

Certificates and sustainability

LGA_29

Belgaqua_22_280_2 WRAS_2209

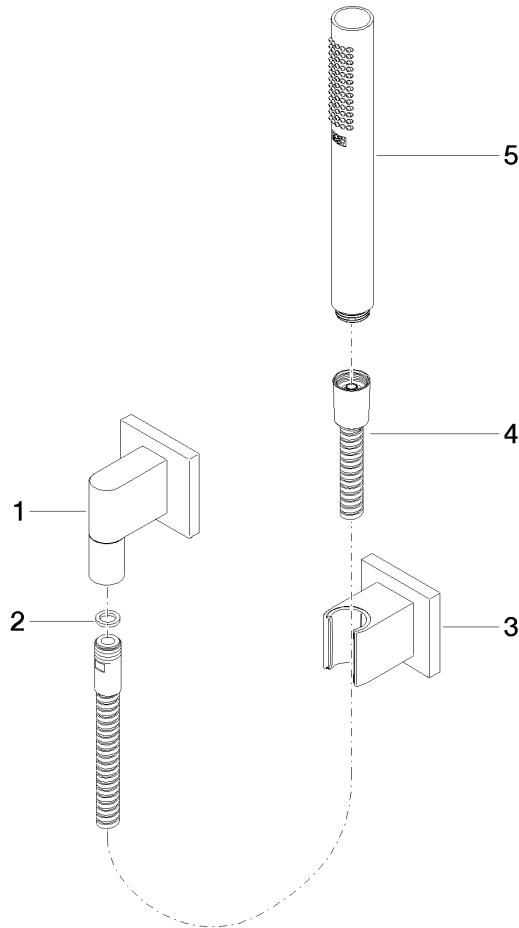

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
4	90 30 02 072 00-28	Metal shower hose 1/2" x 3/8" x 1250 mm - Brushed Durabron (23kt Gold)	1.00	40
1	28 450 980-28	Wall elbow - Brushed Durabron (23kt Gold)	1.00	40
3	28 050 980-28	Wall bracket - Brushed Durabron (23kt Gold)	1.00	40
2	90 14 20 026 00 90	Washer 14 x 8 x 2 mm Centellen WS 3820 -	1.00	14
5	90 12 11 140 40-28	Bar-type hand shower 15 l/min. - Brushed Durabron (23kt Gold)	1.00	-

Spare part can no longer be ordered, please order the replacement item