

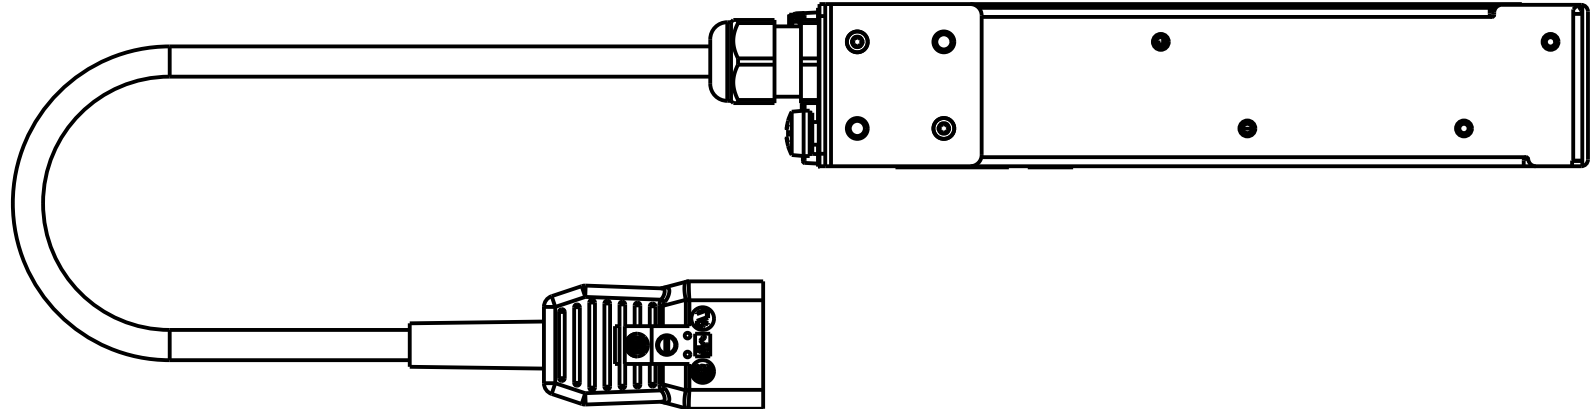
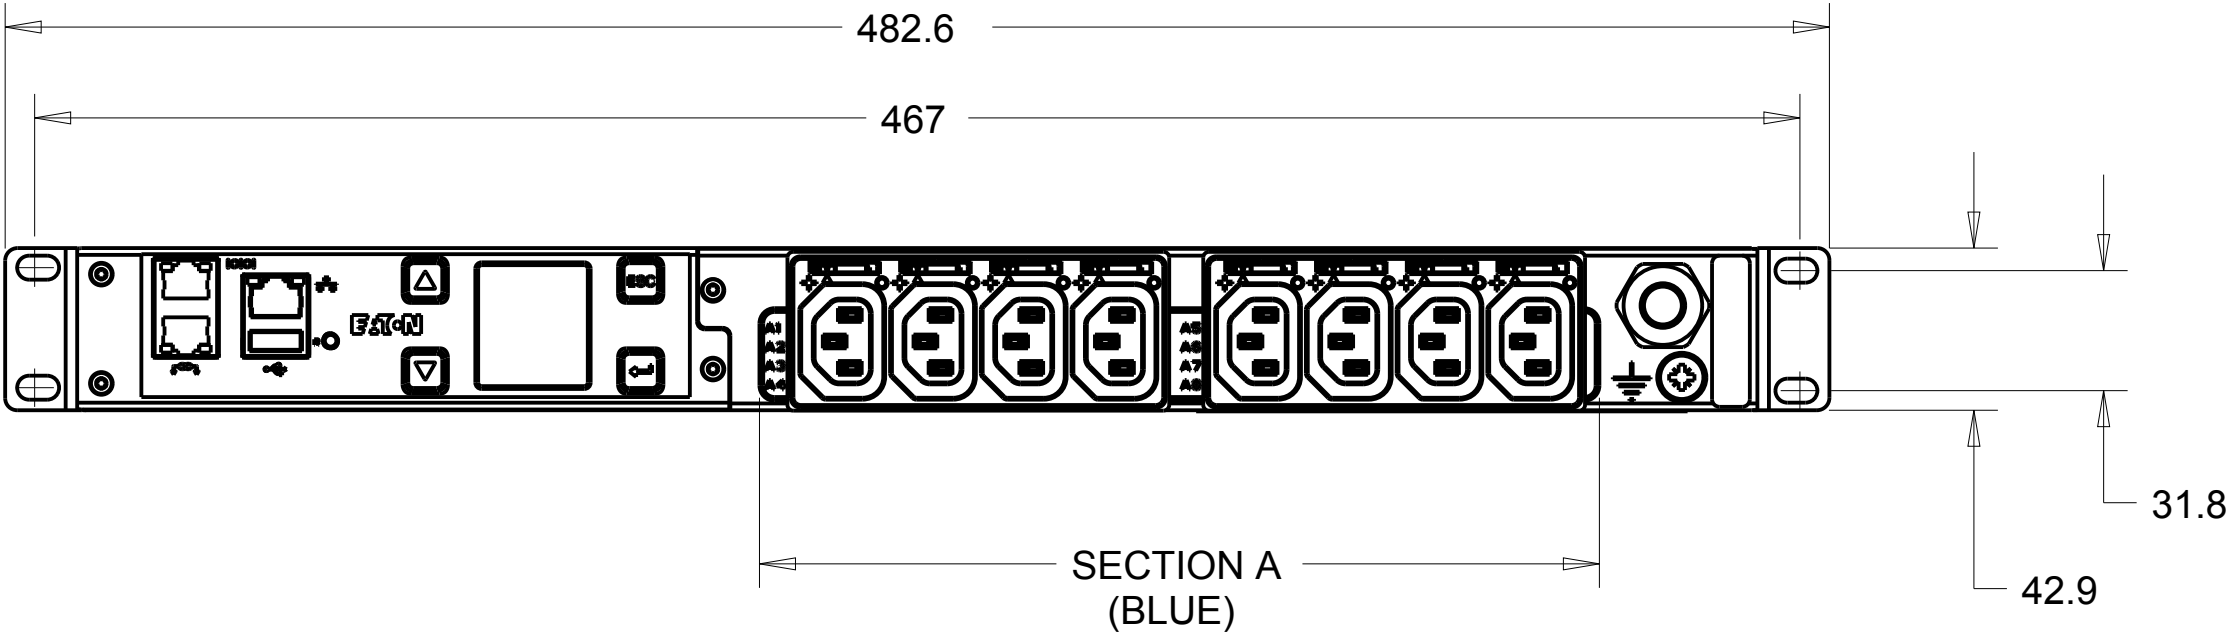


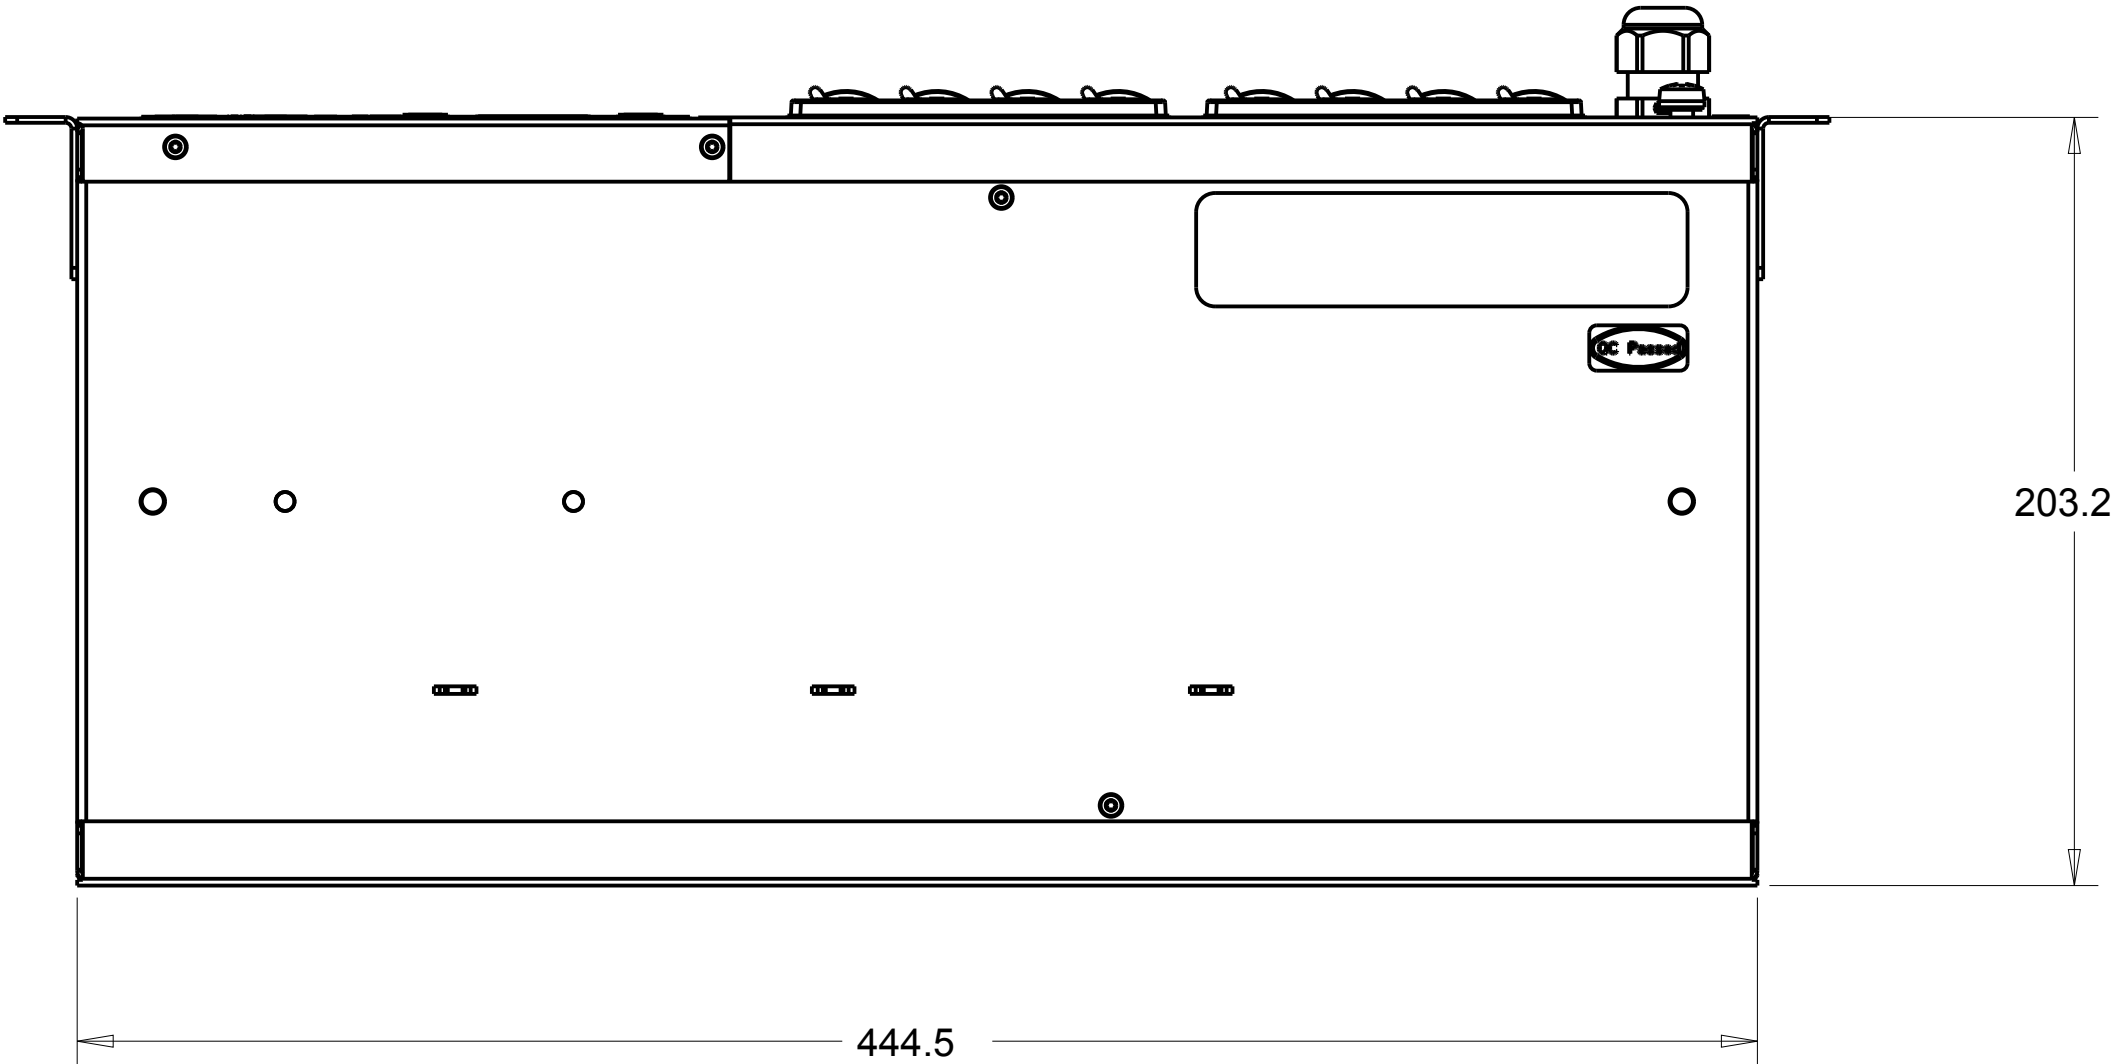


CABLE SHOWN NOT TO SCALE

CIRCUIT SCHEMATIC

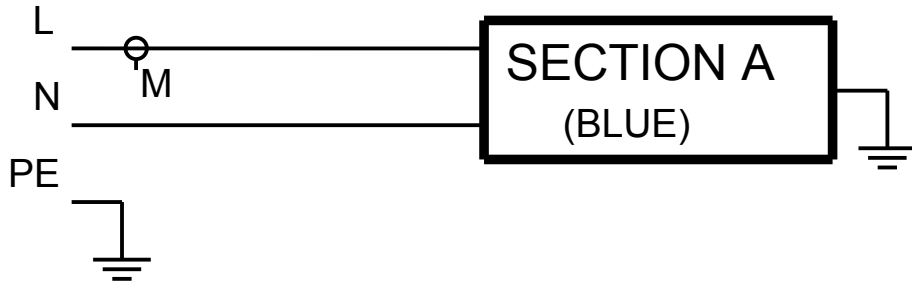

EMIH28		G3+ METERED INPUT	
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
CURRENT POWER AND ENERGY METERING FOR INPUT AND BRANCH	IEC 60309 C20 16A 230V~ W+N+PE 1.5MM HO5 POWER CORD CABLE LENGTH: 3.0 M	(8) IEC 60320 C13 GRIP / P-LOCK	0 TO 60° C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 203.2 MM WIDTH: 444.5 MM DEPTH: 42.9 MM ALUMINIUM CHASSIS, BLACK 19 INCH RACK MOUNT	1Ø; 200-240V~;W+N+PE 50/60HZ 16A	200-240V~;50/60HZ 10A PER C13 16A MAX TOTAL	CE, CB
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
NONE	NONE	STANDARD KSP011 - 1U INSTALL NETWORK PACK OPTIONAL EMPD11H1C2 - ENVIRONMENTAL PROBE	EMI3CXHFABB13AM

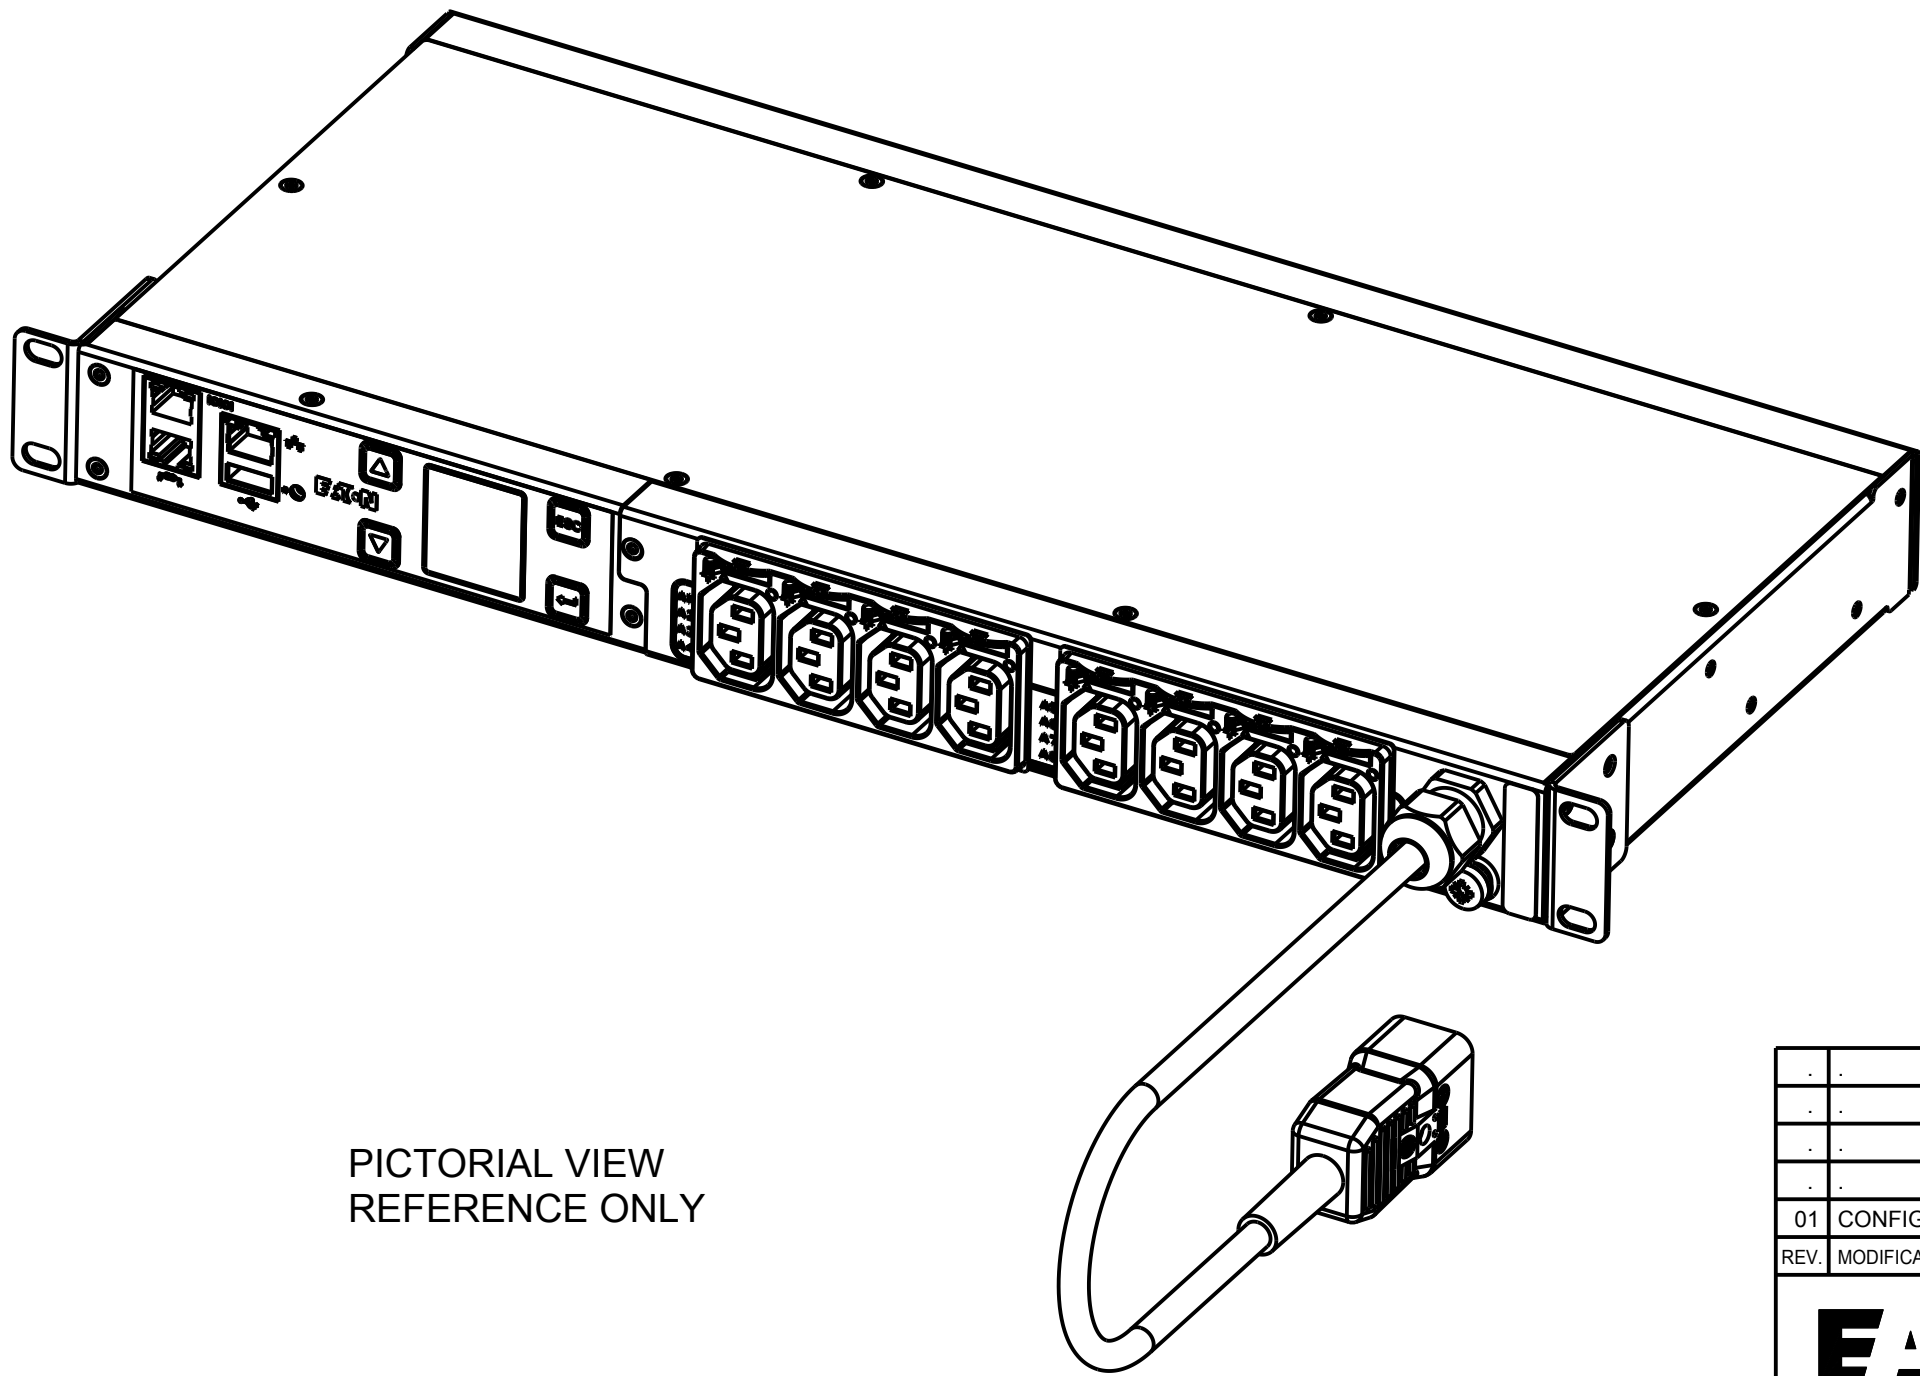

PICTORIAL VIEW
REFERENCE ONLY

01 CONFIGURATION NUMBER CORRECTION, WAS: EMI3CCHFABB13AM		18.05.2016	CW	MB
REV.	MODIFICATION	DATE	DESSIN/DRAW	VERIF.
EAT•N		HEINEMANN PRODUCTS	VUE/VIEW EUROPE: 1/2	N° MAG: EMIH28
CH-1345 LE LIEU SWITZERLAND		DESSINE LE / DRAWED THE		29.02.2016
		PAR / BY		CW
TOLERANCE GENERALE / GENERAL TOLERANCE		VERIFIE PAR / VERIFIED BY		MB
TRAITEMENT / FINISH NA				
MATIERE / MATERIAL NA				
NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT X		DIMENSIONS AND TOLERANCES IN MILLIMETERS		
DESIGNATION EPDU MI 1U (C20 16A 1P)C13X8		SK-77119-Y1		01
COTES A CONTROLER INSPECTION DIMENSIONS XX.XX		COTES FONCTIONNELLES FUNCTIONAL DIMENSIONS # XX.XX		NUMERO DU PLAN PLAN NUMBER
Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation. This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.				