

Proven performance
and easy installation



Pipe Fixing Essentials

2026



Contents

Walraven RSWB	3
Walraven RapidRail® Fixing System	4
Walraven RapidStrut® Channel System	8
Pipe Clamps	12
Phenolic Blocks	17
Pipe Fixing Extras	19

Walraven RSWB (Rapid Sliding Wall Bracket)



- Features and Benefits**
- Extendable bracket for faster mounting of pipework, electrical boxes, shower valves, flues and more!
 - Can be fixed to wood or metal joists
 - Shorter version expands from 25-40cm
 - Longer version expands from 40-60cm
 - Quicker and easier to install than wooden noggins
 - Can be set at multiple depths
 - A lightweight product made from high quality galvanised steel

Part No	Length	Pack Quantity
59491016	10-16" (25-40cm)	50
59491624	16-24" (40-60cm)	50



10-16" RSWB – ideal for fixing pipes in floor joists.
Use with Walraven starQuick® clamps for an even faster fixing!

Installers who have used the RSWB say:

"Handy for running
pipe under floors"

"Time saver
in every way"


"A solution to
many problems"

"These are a
game changer"

RapidRail® Fixing System

Walraven RapidRail® Fixing System

Walraven RapidRail® Light-Duty Channel



- Features and Benefits**
- C-profile
 - for quick and easy fixing of multiple pipes
 - 1.9kg lighter per metre than strut, so it's easier to cut, handle and install
 - EPD (Environmental Product Declaration)
 - choose RapidRail® Hammerfix or Slide Nuts for fast attachment of clips on both sides of the rail
 - material: steel 1.0242
 - pre-galvanized

Part No	Type	L	B (mm)	H (mm)	Bundle (m)
650530202	30x20	2 m	30	20	20

Load test data available on our website.

Walraven RapidRail® End Cap



- Features and Benefits**
- for clean finishing of rail end, covers all burrs
 - easy to fix securely
 - material: PE (polyethylene)

Part No	Colour	Pack 1
6566000	Green	50

Walraven RapidRail® Cantilever Arm



- Features and Benefits**
- base plate with welded C-profile
 - for quick and adjustable fixing of one or multiple pipes
 - CO2 welded
 - with continuous perforation
 - material: base plate made of steel 1.0332 (DD11)
 - zinc plated

Part No	L	Type	Pack 1
66032015	150 mm	30x20	20
66032020	200 mm	30x20	20
66032025	250 mm	30x20	20

Full range of sizes on our website.

Walraven RapidRail® Wall Plate



- Features and Benefits**
- U-profile welded on wall plate
 - for wall fixing of rail
 - rail can be fixed with slot downwards or sideways
 - slots at 90° to each other to simplify fixing
 - with pre-assembled RapidRail® Sliding nut(s) for a quick fixing, and retains assembly in place before final tightening
 - material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
 - zinc plated

Part No	Length	Pack 1
6613200	100mm	25



EPD available for this product!

walraven

Small but mighty lightweight channel system

Walraven's 30x20 RapidRail® channel system is a great alternative to using 41x41 strut for standard heating and plumbing installations.

- Easier to cut on site as it's made of thinner material
- Easier to install, especially overhead
- Easier to store and transport because it is available in 2m lengths
- Precision engineered to a high standard
- Better for the environment because it uses 1.9kg less steel per metre than 41x41!
- It's small but mighty with load tested performance to prove its strength
- Complete range of fast-fit accessories

Walraven RapidRail® Slide Nut



- Features and Benefits**
- slide nut with washer and RapidRail® spring
 - pre-assembled for quick fixing
 - material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
 - zinc plated

Part No	G	Pack 1
6513106	M6	50
6513108	M8	50
6513110	M10	50

Walraven RapidRail® Hammerfix



- Features and Benefits**
- slide nut with stud bolt, washer and RapidRail® spring
 - ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
 - material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
 - zinc plated

Part No	G	L	Pack 1
6523802	M8	25 mm	25
6523803	M8	30 mm	25
6523804	M8	40 mm	25
6523805	M8	50 mm	25
6523806	M8	60 mm	25
6523807	M8	70 mm	25
6523808	M8	80 mm	25
6523809	M8	90 mm	25
6523810	M8	100 mm	25
6523812	M8	120 mm	25
6523815	M8	150 mm	25
6523818	M8	180 mm	25
6523820	M8	200 mm	25
6523002	M10	25 mm	25
6523003	M10	30 mm	25
6523004	M10	40 mm	25
6523005	M10	50 mm	25
6523006	M10	60 mm	25
6523008	M10	80 mm	25
6523010	M10	100 mm	25
6523016	M10	160 mm	25

M6 RapidRail® Hammerfix are available upon request.


Installation Guide



1. Insert



2. Turn 1/4 stroke

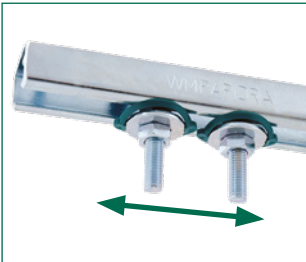


3. Slide



4. Lock



Installation by Glistar Services

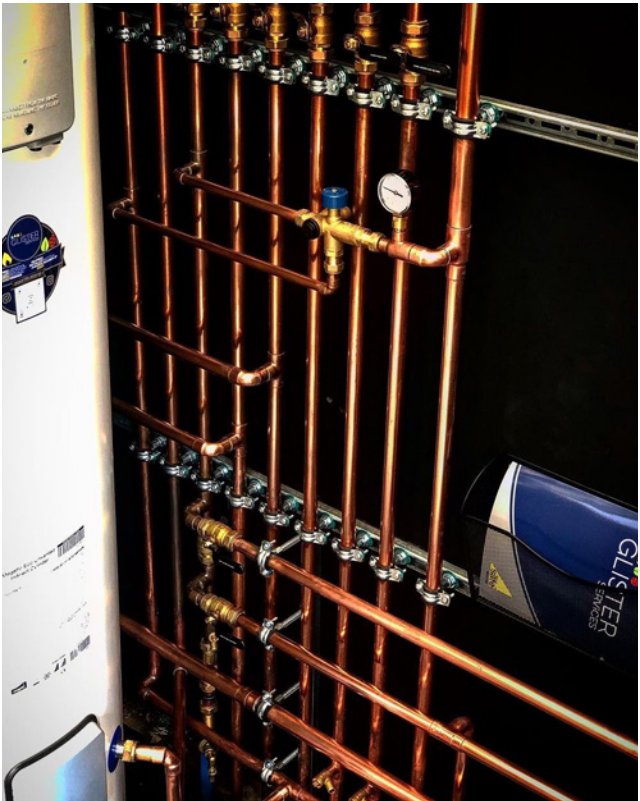

Walraven RapidRail® Ball Swivel Hanger



- Features and Benefits**
- slide nut with ball swivel hanger, washer and RapidRail® spring
 - recommended for metal pipes up to DN 50, plastic pipes up to DN 100
 - with inspection hole to check screw-in depth (attention: when the threaded rod is screwed-in too deep, the ball swivel is blocked)
 - material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
 - zinc plated

Part No	G	L	Pack 1
6520100	M8	45 mm	25
6520200	M8	70 mm	25
6520110	M10	45 mm	25
6520210	M10	70 mm	25

Please note. Always use 2 ball swivel hangers (see application picture). The maximum length change that can be dealt with, depends on the fixing distance (ceiling - pipe). The height difference that occurs as a result, needs to be taken into consideration.

Walraven RapidRail® Connector 90°



- Features and Benefits**
- connector with pre-assembled RapidRail® Slide nut(s)
 - to make rail fabrications
 - material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
 - zinc plated

Part No	Model	Pack 1
6584001	Long / long	25
6584002	Short / long	25
6584003	Short / short	25
6584011	Long / long	25

Visit our website to see our full range of RapidRail® connectors.

RapidStrut® Channel System

Walraven RapidStrut® Channel System

Walraven RapidStrut® Channel



- Features and Benefits**
- channel system with advanced features
 - fixing holes for concrete screws along the channel
 - serrated inner flanges for extra grip
 - cutting marks on all three sides
 - fire tested
 - load tested
 - Conforms to BS6946:1988
 - EPD (Environmental Product Declaration)
 - Third party quality and safety endorsements through ETA and RAL
 - Traceability coding
 - Range of materials available including:
 - Pre-galv
 - BIS UltraProtect® 1000
 - Stainless Steel

Pre-galvanised Channel

Part No	Type	Thickness	Length
6505324	21L (41x21)	1.5mm	3m
6505344	41L (41x41)	1.5mm	3m
6505624	21L (41x21)	1.5mm	6m
6505644	41L (41x41)	1.5mm	6m
6505345	41H (41x41)	2.5mm	3m
6505325	21H (41x21)	2.5mm	3m
6505645	41H (41x41)	2.5mm	6m
6505625	21H (41x21)	2.5mm	6m

BIS UltraProtect® 1000 Channel (BUP1000)

Part No	Type	Thickness	Length	Material
65018327	21IH (41x21)	2.5mm	3m	BUP 1000
65018627	21IH (41x21)	2.5mm	6m	BUP 1000
65018247	41IH (41x41)	2.5mm	2m	BUP 1000
65018347	41IH (41x41)	2.5mm	3m	BUP 1000
65018647	41IH (41x41)	2.5mm	6m	BUP 1000

Full range of profiles and finishes on our website.

Walraven RapidStrut® Cantilever Arm (BUP1000)



- Features and Benefits**
- base plate with welded RapidStrut® Profile for quick and adjustable fixing of one or multiple pipes
 - CO2 welded
 - load tested
 - material: steel with BIS UltraProtect® 1000
 - other cantilever arms available including back-to-back

Part No	Type	L	Pack 1
66084130	41H (41x41)	350mm	10
66084145	41H (41x41)	450mm	10
66084160	41H (41x41)	600mm	8
66084175	41H (41x41)	750mm	8
66082130	21H (41x21)	300mm	10
66082145	21H (41x21)	450mm	20
66082160	21H (41x21)	600mm	10

Full range of sizes and lengths on our website.

Walraven RapidStrut® Slide Nut G2 (BUP1000)



- Features and Benefits**
- slide nut with washer and RapidStrut® spring
 - ready-to-use pre-assembled for a quick fixing
 - material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
 - surface protection: BIS UltraProtect® 1000

Part No	Type	Pack 1
665185108	M8	20
665185110	M10	20
665185112	M12	20

Walraven RapidStrut® Hammerfix G2 (BUP1000)



- Features and Benefits**
- slide nut with stud bolt, washer and RapidStrut® spring
 - ready-to-use pre-assembled for a quick fixing
 - material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
 - surface protection: BIS UltraProtect® 1000

Part No	Type	L	Pack 1
652785004	M10	40mm	15
652785006	M10	60mm	5
652785008	M10	80mm	5

Full range of sizes on our website.

Free structural calculations tool
for channel on our website



Don't use any channel, choose Walraven RapidStrut®

There are plenty of strut channel solutions on the market, but Walraven RapidStrut® is different. If you're looking to elevate your installations, take a look at what makes our precision engineered channel system different.

What makes it different?

- Fire tested system so you can install a fire rated installation
- Environmental Product Declaration (EPD) available
- Advanced corrosion protection with BIS UltraProtect® 1000
- 8.5mm fixing holes for concrete screws all along the channel
- Fully load tested to meet your structural requirements (including cantilevers)
- Traceability coding printed on every piece of channel
- In house technical support and designs offered

Walraven RapidStrut® Ball Swivel Hanger



- Features and Benefits**
- slide nut with ball swivel hanger, washer and RapidStrut® spring
 - recommended for metal pipes up to DN 50, plastic pipes up to DN 100
 - ready-to-use pre-assembled for a quick fixing
 - material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
 - zinc plated
 - tested for fire safety according to EN 1363-1

Part No	Type	Pack 1
66530805	M8	25
66530005	M10	25

Please note. Always use 2 ball swivel hangers and secure by additional hexagon nut. The maximum length change that can be dealt with, depends on the fixing distance (ceiling – pipe). The height difference that occurs as a result, needs to be taken into consideration.

Walraven RapidStrut® End Cap



- Features and Benefits**
- for clean finishing of rail end, covers all burrs
 - easy to fix securely
 - material: PE (polyethylene), green

Part No	Type	Pack 1
6566041	41H (41x41)	50
6566021	21H (41x21)	50

Full range of sizes and lengths on our website.

Walraven RapidStrut® 90° Connector G2 (BUP1000)



- Features and Benefits**
- for easy construction of RapidStrut® frames
 - includes pre-assembled slide nuts for quick fixing
 - twist and tighten technology
 - material: metal parts made of steel 1.0332; springs made of POM (polyoxymethylene), green
 - surface protection: BIS UltraProtect® 1000

Part No	Height / Width (mm)	Pack 1
665885205	113.75 / 113.75	20
665885203	113.75 / 72.75	25
665885202	72.75 / 72.75	50
665885102	72.75 / 52.75	50

Walraven RapidStrut® Base Plate G2 (BUP1000)



- Features and Benefits**
- for easy fixing of RapidStrut® Channel to substrate
 - includes pre-assembled fixings to grip channel (twist and tighten)
 - material: metal parts made of steel 1.0332; springs made of POM (polyoxymethylene), green
 - surface protection: BIS UltraProtect® 1000
 - tested for fire safety according to EN 1366-1

Part No	Length	Pack 1
665885400	100mm	10

Visit our website to see our full range of RapidStrut® connectors and accessories.

What is an EPD?

An EPD provides comprehensive details on the environmental impact of a product, empowering you to make more informed and eco-conscious choices.

As we continue to prioritise environmental responsibility, we are pleased to share that we have EPDs available for, Walraven RapidRail®, RapidStrut® and Maxx, as well as Walraven pipe clamps.

This is just the beginning—more EPDs for our products will follow soon, reinforcing our dedication to a greener future. Find out more about EPDs and our sustainability journey at: walraven.com/en/sustainability



Walraven BIS UltraProtect® 1000

Walraven RapidStrut® channel is available in multiple materials including:

- Pre-galv
- Walraven BIS UltraProtect® 1000 (BUP1000)
- Stainless steel

BUP1000 protection is our standard alternative to Hot Dip Galv (HDG), and is available on a range of Walraven products including channel and clamps.

This unique surface protection was developed to offer a better corrosion resistance than HDG. Whilst HDG coated products will last up to 600hrs salt spray test, **Walraven's BUP1000 system withstands a salt spray test of at least 1000 hours.**



Advanced anti-corrosion protection

Pipe Clamps





EPD's available on
Walraven Pipe
Clamps

High quality pipe supports that won't let you down

Our extensive range of pipe clamps includes lined and unlined clips for lightweight, domestic pipework up to heavy-duty commercial installations.

Whether you're looking for easy-installation features, quality testing and approvals or advanced corrosion protection for outdoor use, we've got you covered.

- Walraven 2S clamps for everyday use
- Walraven Bifix® G2 for tough jobs
- Walraven Heavy Duty Clamps for high loads
- Walraven Split Bands for traditional pipe fixing

Metal Pipe Clamps

Walraven 2S Clamp with Lining (M8/10)



- Features and Benefits**
- standard two-screw clamp
 - for every day use on steel, copper or multilayer pipes
 - gapless range from Ø 10-225mm
 - rubber lining grips in steel parts to prevent sliding of the lining
 - screws secured with anti-loss washer
 - medium safe load according to RAL GZ-655
 - material: steel
 - zinc plated
 - noise insulating lining, EPDM rubber, black
 - age resistant lining
 - sound insulating lining according DIN 4109


Part No	D (mm)	D (")	G	Pack 1
33435014	10 - 14	1/8 - 1/4	M8/10	50
33435019	15 - 19	3/8	M8/10	50
33435024	20 - 24	1/2	M8/10	50
33435030	25 - 30	3/4	M8/10	50
33435037	31 - 37	1	M8/10	50
33435046	38 - 46	1 1/4	M8/10	50
33435052	47 - 52	1 1/2	M8/10	50
33435061	53 - 61	2	M8/10	50
33435067	62 - 67	-	M8/10	50
33435074	68 - 74	-	M8/10	50
33435081	75 - 81	2 1/2	M8/10	50
33435087	82 - 87	-	M8/10	50
33435095	88 - 95	3	M8/10	50
33435103	96 - 103	-	M8/10	50
33435112	104 - 112	-	M8/10	25
33435118	113 - 118	4	M8/10	25
33435127	119 - 127	-	M8/10	25
33435137	128 - 137	-	M8/10	25
33435144	138 - 144	5	M8/10	25
33435153	145 - 153	-	M8/10	25
33435162	154 - 162	-	M8/10	15
33435172	163 - 172	6	M8/10	15
33435183	173 - 183	-	M8/10	15
33435194	184 - 194	-	M8/10	15
33435205	195 - 205	-	M8/10	15
33435216	206 - 216	-	M8/10	10
33435225	217 - 225	8	M8/10	10

Walraven 2S Clamp (M8/10)



- Features and Benefits**
- standard two-screw clamp
 - for fixing insulated steel or copper pipes
 - gapless range from Ø 10-225mm
 - screws secured with anti-loss washers
 - material: steel
 - zinc plated
 - medium safe load according to RAL GZ-655

Part No	D (mm)	D (")	G	Pack 1
33035014	10 - 14	1/8 - 1/4	M8/10	50
33035019	15 - 19	3/8	M8/10	50
33035024	20 - 24	1/2	M8/10	50
33035030	25 - 30	3/4	M8/10	50
33035037	31 - 37	1	M8/10	50
33035046	38 - 46	1 1/4	M8/10	50
33035052	47 - 52	1 1/2	M8/10	50
33035061	53 - 61	2	M8/10	50
33035067	62 - 67	-	M8/10	50
33035074	68 - 74	-	M8/10	50
33035081	75 - 81	2 1/2	M8/10	50
33035087	82 - 87	-	M8/10	50
33035095	88 - 95	3	M8/10	50
33035103	96 - 103	-	M8/10	50
33035112	104 - 112	-	M8/10	25
33035118	113 - 118	4	M8/10	25
33035127	119 - 127	-	M8/10	25
33035137	128 - 137	-	M8/10	25
33035144	138 - 144	5	M8/10	25
33035153	145 - 153	-	M8/10	25
33035162	154 - 162	-	M8/10	25
33035172	163 - 172	6	M8/10	25
33035183	173 - 183	-	M8/10	15
33035194	184 - 194	-	M8/10	15
33035205	195 - 205	-	M8/10	15
33035216	206 - 216	-	M8/10	15
33035225	217 - 225	8	M8/10	10

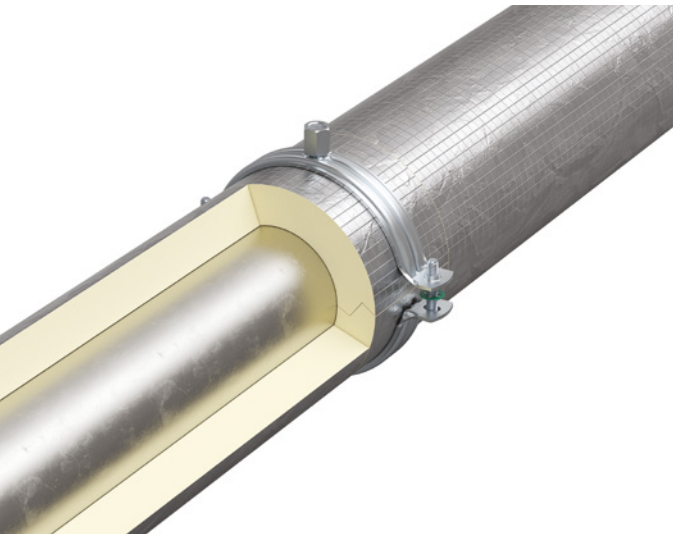

Walraven Bifix® G2 with Lining (M8/10) (BUP1000)



- Features and Benefits**
- advanced two-screw clamp with premium design
 - quick closing mechanism
 - 2 component EPDM lining provides easy positioning of the pipe during installation
 - when the clamp is closed, the pipe rests on soft black rubber lining for increased noise reduction
 - sound insulating lining according to DIN4109
 - advanced geometry for increased strength
 - medium to high safe load according to RAL GZ-655 and RAL GZ-656
 - material: steel
 - surface protection:
 - product is part of the UltraProtect® 1000 system
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227


Part No	D (mm)	D (")	DN	G	Pack 1
31085014	10 - 14	1/4	8	M8/10	50
31085019	15 - 19	3/8	10	M8/10	50
31085023	20 - 23	1/2	15	M8/10	50
31085028	25 - 28	3/4	20	M8/10	50
31085035	31 - 35	1	25	M8/10	50
31085039	36 - 39	-	-	M8/10	50
31085045	40 - 45	1 1/4	32	M8/10	50
31085052	48 - 52	1 1/2	40	M8/10	50
31085058	54 - 58	-	-	M8/10	50
31085064	60 - 64	2	50	M8/10	50
31085070	66 - 70	-	-	M8/10	50
31085079	75 - 79	2 1/2	65	M8/10	50
31085083	80 - 83	-	-	M8/10	50
31085091	88 - 91	3	80	M8/10	25
31085097	92 - 97	-	-	M8/10	25
31085105	100 - 105	-	-	M8/10	25
31085115	108 - 115	4	100	M8/10	25
31085130	125 - 130	-	-	M8/10	25
31085140	133 - 140	5	125	M8/10	25
31085160	152 - 160	-	-	M8/10	25
31085169	165 - 169	6	150	M8/10	10
31285180	176 - 180	-	-	M10	15
31285200	192 - 200	-	-	M10	15
31285210	205 - 210	-	-	M10	10
31285225	219 - 225	8	200	M10	10

Walraven Bifix® G2 (M8/10) (BUP1000)



- Features and Benefits**
- advanced two-screw clamp with premium design
 - for fixing insulated steel or copper pipe
 - with quick closing mechanism
 - advanced geometry for increased strength
 - material: steel
 - surface protection:
 - product is part of the UltraProtect® 1000 system
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
 - medium to high safe load according to RAL GZ-655 and RAL GZ-656
 - tested for fire safety

Part No	D (mm)	D (")	DN	G	Pack 1
3008014	10 - 14	1/4	8	M8/10	50
3008019	15 - 19	3/8	10	M8/10	50
3008023	20 - 23	1/2	15	M8/10	50
3008028	25 - 28	3/4	20	M8/10	50
3008035	31 - 35	1	25	M8/10	50
3008039	36 - 39	-	-	M8/10	50
3008045	40 - 45	1 1/4	32	M8/10	50
3008052	48 - 52	1 1/2	40	M8/10	50
3008058	54 - 58	-	-	M8/10	50
3008064	60 - 64	2	50	M8/10	50
3008070	66 - 70	-	-	M8/10	50
3008079	75 - 79	2 1/2	65	M8/10	50
3008083	80 - 83	-	-	M8/10	50
3008091	88 - 91	3	80	M8/10	50
3008105	100 - 105	-	-	M8/10	50
3008115	108 - 115	4	100	M8/10	25
3008130	125 - 130	-	-	M8/10	25
3008140	133 - 140	5	125	M8/10	25
3008160	152 - 160	-	-	M8/10	25
3008169	165 - 169	6	150	M8/10	25
3008180	176 - 180	-	-	M8/10	15
3008200	192 - 200	-	-	M8/10	15
3008210	205 - 210	-	-	M8/10	15
3008225	219 - 225	8	200	M8/10	15

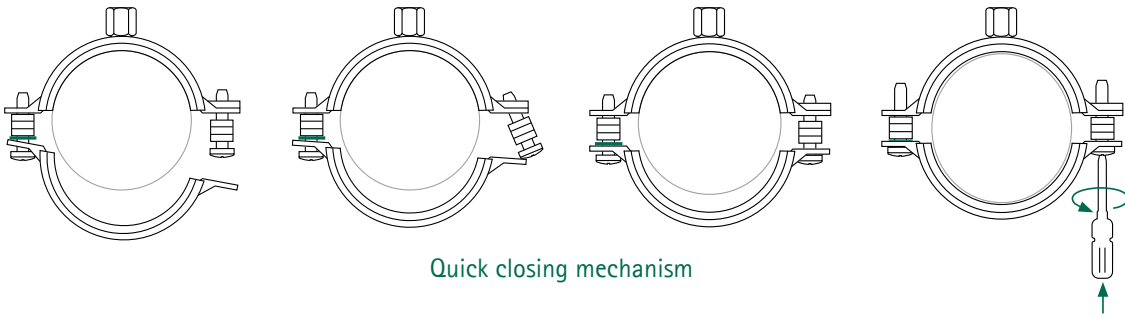

Walraven Bifix® 5000 G2 (BUP1000)



- Features and Benefits**
- advanced two-screw clamp with premium design
 - for installing all types of plastic pipes
 - with quick closing mechanism
 - with removable spacer washers for either sliding or anchoring
 - material: steel
 - surface protection:
 - product is part of the UltraProtect® 1000 system
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
 - noise insulating lining, EPDM rubber, green
 - inner part of lining is flush to improve sliding of pipe in clamp
 - age resistant lining
 - sound insulating lining according DIN 4109
 - medium to high safe load according to RAL GZ-655 and RAL GZ-656

Part No	D (mm)	G	Pack 1
3188016	16	M8/10	50
3188020	20	M8/10	50
3188025	25	M8/10	50
3188032	32	M8/10	50
3188040	40	M8/10	50
3188050	50	M8/10	50
3188056	56	M8/10	50
3188063	63	M8/10	50
3188075	75	M8/10	50
3188090	90	M8/10	25
3188110	110	M8/10	25
3188125	125	M8/10	25
3188135	135	M8/10	25
3188160	160	M8/10	10
3188200	200	M8/10	10

Walraven Heavy Duty Clamp HD500 (BUP 1000)



- Features and Benefits**
- two-part clamps designed for heavy loads
 - certified load-bearing capacity
 - tested for fire safety
 - bolts secured with anti-loss washer with CO2 welded connection nut
 - material: steel
 - surface protection:
 - product is part of the Walraven BIS UltraProtect® 1000 system
 - suitable corrosive environments
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

Part No	D (mm)	G	Fa,z (N)	Pack 1
33038045	40-45	M8/M10	2,100	25
33038052	47-52	M8/M10	2,100	25
33038065	59-65	M8/M10	2,100	25
33048078	72-78	M10/12	4,000	25
33048385	79-85	M10/12	4,000	25
33048092	86-92	M10/12	4,000	25
33048106	98-106	M10/12	4,000	25
33048116	108-116	M10/12	4,000	25
33048133	125-133	M10/12	4,000	25
33048140	132-140	M10/12	4,000	25
33048154	148-154	M10/12	4,000	15
33048169	159-169	M10/12	8,200	15
33048183	173-183	M10/12	8,200	15
33048202	192-202	M10/12	8,200	15

Full range of sizes on our website.

Walraven Heavy Duty Lined Clamp HD1501 (BUP 1000)



- Features and Benefits**
- two-part clamps designed for heavy loads
 - noise insulating lining, EPDM rubber, black
 - sound insulating according to DIN 4109
 - noise reduction according to ISO 3822-1 up to 18dB(A)
 - certified load-bearing capacity
 - tested for fire safety
 - bolts secured with anti-loss washer
 - with CO2 welded connection nut
 - material: steel
 - surface protection:
 - product is part of the Walraven BIS UltraProtect® 1000 system
 - suitable corrosive environments
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

Part No	D (mm)	G	Fa,z (N)	Pack 1
33138023	19-23	M8/M10	1,500	25
33138029	25-29	M8/M10	1,500	25
33138035	30-35	M8/M10	1,500	25
33138045	40-45	M8/M10	1,500	25
33138051	46-51	M8/M10	1,500	25
33138064	59-64	M8/M10	1,500	25
33148078	72-78	M10/12	2,300	25
33148092	86-92	M10/12	2,300	25
33148116	108-116	M10/12	2,300	25
33148169	159-169	M10/12	3,800	25

Full range of sizes on our website.

Walraven Split Band Clips



- Features and Benefits**
- two-piece traditional pipe clips
 - zinc plated
 - available in other finishes including:
 - hot dip galv
 - stainless steel

Part No	D (mm)	NB	Pack 1
B4103060	60	50	50
B4103076	76	65	40
B4103089	89	80	35
B4103114	114	100	25
B4103168	168	150	10

Full range of sizes on our website.

Walraven Split Band Clips (Over Insulation)



- Features and Benefits**
- two-piece traditional pipe clips
 - for use over insulation
 - zinc plated
 - available in other finishes including:
 - hot dip galv
 - stainless steel

Part No	D (mm)	Pack 1
B4093114	114	25
B4093139	139	20
B4093159	159	20
B4093168	168	20
B4093180	180	20
B4093220	220	10

Full range of sizes on our website.

Walraven Saddle Clamps



- Features and Benefits**
- single piece traditional fixing for steel pipe
 - zinc plated
 - PP isolation strips available
 - available in other finishes including:
 - hot dip galv
 - stainless steel

Part No	D (mm)	NB	Pack 1
B3103027	27	20	200
B3103034	34	25	150
B3103042	42	32	150
B3103048	48	40	100
B3103060	60	50	100
B3103114	114	100	40

Full range of sizes on our website.

Combine Walraven Phenblox®

with Walraven pipe clamps to ensure efficient installation and load-bearing capacity.

Walraven Phenolic can be combined with Walraven clamps including 2S, HD clamps and split bands depending on your needs. To help you find the matching clamp and block combination, we have a handy table in our Walraven Phenblox® brochure available online.



Walraven Phenblox® Phenolic Insulation Blocks



- Features and Benefits**
- load bearing insulation block for steel, copper and plastic pipe
 - 6 different thicknesses available 15-50mm
 - complete range of pipe sizes catered for, plus specials
 - CE and UKCA marked
 - bore coating ensures no corrosion on copper pipes
 - high thermal efficiency, K value 0.030 to 0.037 W/(m·K) at 10 °C
 - fire resistant to Euroclass BL-s1 d0
 - made in the UK
 - temperature resistance from -50 °C to +110 °C

Part No	Thickness (mm)	Pipe Ø	Pipe (NB)	Pack 1
8901015015	15	15	-	50
8901015021	15	21-22	15	50
8901015027	15	27-28	20	50
8901020015	20	15	-	50
8901020021	20	21-22	15	50
8901020027	20	27-28	20	50
8901025015	25	15	-	50
8901025021	25	21-22	15	50
8901025027	25	27-28	20	50
8901030015	30	15	-	50
8901030021	30	21-22	15	50
8901030027	30	27-28	20	50
8901040015	40	15	-	50
8901040021	40	21-22	15	50
8901040027	40	27-28	20	50

This is just a small selection of our phenolic blocks, please visit our website to see the full range of sizes.



Plastic Pipe Clamp

Walraven starQuick® Clamp (Grey)



- Features and Benefits**
- one-part clamp
 - clamp closes by applying pressure to the pipe
 - for outdoor use and installations in swimming pool environments, chemical factories, zinc factories, etc.
 - due to a patented profile it is possible to tack several clamps to each other
 - material: modified PA6 (polyamide), grey (according to RAL 7035)
 - resistant to UV, ageing, oil and petrol
 - no corrosion, recyclable, halogen free
 - temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C

Part No	D (mm)	D (")	DN	Type	Pack 1
0854010	10 - 12	1/8	6	SQ-10	100
0854012	12 - 14	1/4	8	SQ-12	100
0854015	14 - 16	-	-	SQ-15	100
0854018	16 - 20	3/8	10	SQ-17	100
0854022	20 - 23	1/2	15	SQ-20	50
0854028	24 - 28	3/4	20	SQ-25	50
0854031	28 - 32	-	-	SQ-28	50
0854035	32 - 35	1	25	SQ-32	50
0854038	35 - 40	-	-	SQ-36	25
0854042	40 - 44	1 1/4	32	SQ-40	25
0854050	44 - 50	-	-	SQ-47	25
0854054	48 - 55	1 1/2	40	SQ-51	15
0854063	59 - 65	2	50	SQ-59	15

Walraven starQuick® Clamp (White)



- Features and Benefits**
- one-part clamp
 - clamp closes by applying pressure to the pipe
 - for outdoor use and installations in swimming pool environments, chemical factories, zinc factories, etc.
 - due to a patented profile it is possible to tack several clamps to each other
 - material: modified PA6 (polyamide), white (according to RAL 9003)
 - resistant to UV, ageing, oil and petrol
 - no corrosion, recyclable, halogen free
 - temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C

Part No	D (mm)	D (")	Type	Colour	Pack 1
0855015	14 - 16	-	SQ-15	White	100
0855022	20 - 23	1/2	SQ-20	White	50

Full range of sizes on our website.

Walraven starQuick® Distance Block




- Features and Benefits**
- for clamp fixing with a distance to the structure
 - for screwing a clip to a distance block, use a screw of at least 55 mm
 - suitable for SQ-10 up to SQ-36

Part No	L	B (mm)	H (mm)	Pack 1
0854510	27 mm	17	10	25

When a basic plastic clip isn't enough!

Walraven starQuick® is a self-closing clip which locks into place when you push the pipe into it.

It can also be re-opened without breaking. Made from strong Polyamide it is suitable for copper and MLCP pipe and use in corrosive environments.

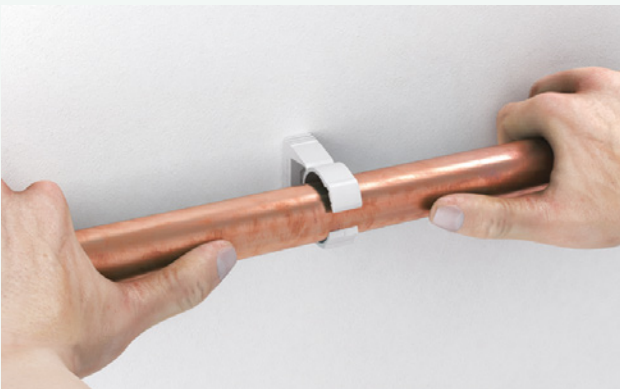

Pipe Fixing Extras



Walraven W-HLX-N Concrete Screw



Features and Benefits

- M8/M10 threaded rod hanger
- high load capacity
- reduced minimum edge and anchor spacing distances
- ETA Option 1 approval for cracked and non-cracked concrete
- ETA according to EAD 330747-00-0601 for multiple use for non-structural applications
- also approved for use in precast pre-stressed hollow core slabs
- up to 3 anchoring depths provide maximum installation flexibility
- option to install without drill hole cleaning
- material: steel
- zinc plated
- seismic performance C1
- fire resistance class R30-R120

Part No	Size	L	Thread	Pack 1
62533304	6	35mm	M8/10	100
62533305	6	55mm	M8/10	100

Full range of sizes on our website.

View ETA documents online
for all technical details

Walraven W-HLX-P/PX Concrete Screw



Features and Benefits

- small and large pan heads
- high load capacity
- reduced minimum edge and anchor spacing distances
- ETA Option 1 approval for cracked and non-cracked concrete
- ETA according to EAD 330747-00-0601 for multiple use for non-structural applications
- also approved for use in precast pre-stressed hollow core slabs
- option to install without drill hole cleaning
- material: steel
- zinc flake coating
- seismic performance C1
- fire resistance class R30-R120

Part No	Size	L (mm)	Pan head Ø (mm)	Pack 1
62511304	6	40	15	100
62512304	6	40	17	100
62512306	6	60	17	100

Small pan head ideal for RapidRail® installation
Large pan head ideal for RapidStrut® installation

W-HLX-H Concrete Screw



Features and Benefits

- heavy duty hex head self-tapping screw
- for solid fixing into cracked and non-cracked concrete, precast pre-stressed hollow core slabs
- high load capacity
- up to 3 anchoring depths
- reduced minimum edge and anchor spacing
- ETA Option 1 approval for cracked and non-cracked concrete
- ETA according to EAD 330747-00-0601 for multiple use for non-structural applications
- seismic performance category C1 & C2
- option to install without drill hole cleaning
- material: steel
- zinc flake coating
- fire resistance class R30-R120

Part No	Size	L (mm)	Pack 1
62510304	6	40	100
62510306	6	60	100
62510406	8	60	100
62510408	8	75	100
62510410	8	100	100
62510507	10	70	50
62510509	10	90	50
62510510	10	100	50
62510611	12	110	50

Walraven W-LX-M Concrete Screw



Features and Benefits

- threaded stud anchor for direct attachment of pipe clamps
- high load capacity
- quick and simple installation procedure
- ETA Option 1 approval for cracked and non-cracked concrete
- ETA according to EAD 330747-00-0601 for multiple use for non-structural applications
- also approved for use in precast pre-stressed hollow core slabs
- material: steel
- zinc plated
- fire resistance class R30-R120

Part No	Thread	L	Pack 1
62434304	M8	35mm	100
62434305	M8	55mm	100

Walraven Stud Bolt



Features and Benefits

- cut stud for use with RapidRail® or RapidStrut® slide nuts
- made according to DIN 976-1
- material: steel
- zinc plated
- M10 tested for fire safety

Part No	G	L	Fa,z (N)	Pack 1
6313802	M8	25 mm	9,700	100
6313803	M8	30 mm	9,700	100
6313804	M8	40 mm	9,700	100
6313805	M8	50 mm	9,700	100
6313806	M8	60 mm	9,700	100
6313807	M8	70 mm	9,700	100
6313808	M8	80 mm	9,700	100
6313809	M8	90 mm	9,700	100
6313810	M8	100 mm	9,700	100
6323002	M10	25 mm	15,400	50
6323003	M10	30 mm	15,400	50
6323004	M10	40 mm	15,400	50
6323005	M10	50 mm	15,400	50
6323006	M10	60 mm	15,400	50
6323007	M10	70 mm	15,400	50
6323008	M10	80 mm	15,400	50
6323009	M10	90 mm	15,400	50
6323010	M10	100 mm	15,400	50

More lengths available in both M8 and M10 up to 200mm. See online for details.

Walraven Ball Swivel Hangers




Features and Benefits

- for fastening hanging pipes with thermal expansion
- allows axial and radial pipe movements
- material: steel
- zinc plated
- tested for fire safety according to EN 1363-1

Part No	Type	L	Pack 1
6642010	M10	49mm	50
6644010	M10	64mm	50
6642110	M10	79mm	25

Full range of sizes on our website.

Walraven Expansion Device



- Features and Benefits**
- for dealing with expansion and contraction of pipes
 - fix directly on the building structure or to channel
 - material: metal parts made of steel; plastic parts made of POM (polyoxymethylene) / PPS (polyamphenylensulfid)
 - zinc plated

Part No	Type	Pack 1
6663410	M8/10	50
6663412	M10/12	10

Full range of sizes on our website.

Walraven Fixpoint Console Light (BUP1000)



- Features and Benefits**
- flexible use console module for high forces up to 5 KN
 - tested as a sound-insulated fixed point with lined heavy duty clamps
 - can be used as a pipe connection point in conjunction with 2 or 3 heavy-duty clamps type HD500 (up to 140 mm) or HD1501 (up to 154 mm)
 - adjustable height and inclination
 - material: steel 1.0332
 - surface protection: BIS UltraProtect® 1000

Part No	Type	Pack 1
6698204	FPC Console Light	1

Medium and heavy consoles also available. Please contact our technical team for advice on safe loads.

Walraven Yeti® Type A Rubber Foot (BUP1000)



- Features and Benefits**
- for supporting small pipes and ducting, cable trays and heat pumps
 - 100% recycled rubber and BIS UltraProtect® 1000 strut insert
 - certified UV resistance and noise reduction

Part No	Length (mm)	Pack 1
67688250	250	1
67688400	400	1
67688600	600	1
67688000	1000	1

Low height (50mm) feet also available

Walraven VibraTek® HS-1 Spring Hanger



- Features and Benefits**
- spring isolator for light suspended loads such as pipework
 - epoxy powder coated

Part No	Recommended Max Load (N)	Pack 1
2800600150	140	36
2800600250	230	36
2800600500	450	36

Spring hangers for more load values on our website



Walraven Smart Installation Solutions

Visit our website to see our complete product range which includes:

- Pipe support systems
 - HVAC supports
 - Rooftop support solutions
- Anti-vibration components
 - Firestopping solutions
 - Electrical fixings

We have a Technical Support Team who are on hand to provide advice, project designs and answer all your questions.

Our products can be purchased through M&E fixing merchants, electrical wholesalers and plumbing merchants across the UK and Ireland. To find a stockist in your area please contact us.

Tel: 01295 753400
Email: sales.uk@walraven.com

Find out how we can support you

Would you like to find out more about any of the solutions described in this brochure?
Or would you like to discuss how we could help you find the best possible solution for your project?
Get in touch today!

United Kingdom
Ireland

Walraven Ltd.
18 Wildmere Road
BANBURY
OX16 3JU
Tel. +44 (0)1295 75 34 00
sales.uk@walraven.com

