

# Concord

## OFFICELYTE 600 3000K HE DALI 2069514



### Features

- Concord OFFICELYTE 600 3000K HE DALI is a high performance low glare luminaire for offices and education applications. Suitable for lay in, as well as for pull up, into concealed grid and plasterboard ceilings with our optional wedge accessory kits suitable. Optical solution is a combination of Tp(a) rated central prismatic and side diffusers. Painted steel housing with RAL 9016 finishing colour. 595x595x92mm dimensions. 3150lm luminous flux, 23.5W total power consumption, 134lm/W efficacy level, CRi80 3000K (Warm white) LED light sources with chromaticity tolerance of 3-step MacAdam ellipse. Conforming to EN 12464-1 for indoor work places, UGR<19. IK03 impact resistance, IP20 ingress protection level. IEC Class II electrical protection. Photobiological Risk Group 0. Lifespan 93k hours at L80B50. Glow Wire test 850°C. DALI dimmable.

### Product Overview


<b>Product name</b>	OFFICELYTE 600 3000K HE DALI
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>General application</b>	Office, Education
<b>ETIM Class</b>	EC002892
<b>Fixture luminous flux (lm)</b>	3150
<b>Luminaire efficacy (lm/W)</b>	134
<b>Correlated colour temperature (k)</b>	3000
<b>Light colour</b>	Warm White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3

# Concord


## OFFICELYTE 600 3000K HE DALI 2069514

Beam Angle (°)	87
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	23.5
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL9016
IP rating	IP20
IK rating	IK03
Product EAN number	5025768695140
Warranty	5 years
Dimming method	DALI-2

### Photometry

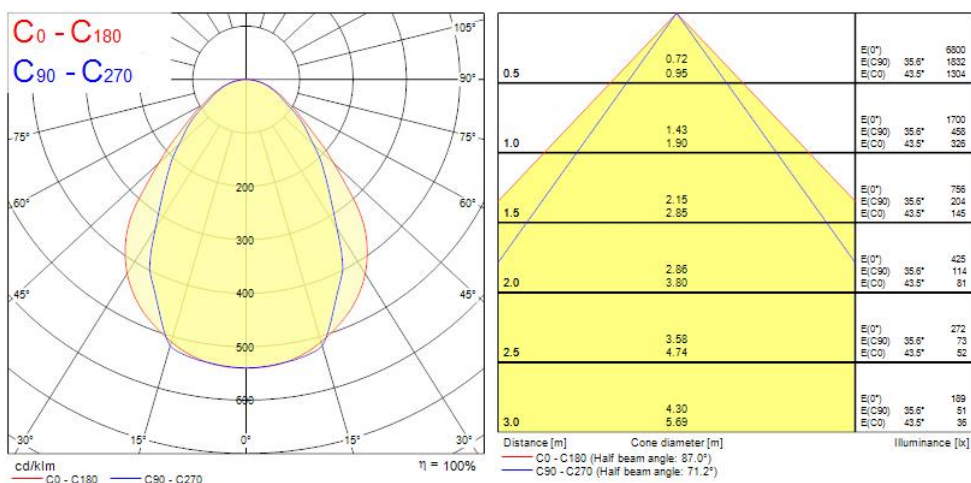

### Technical drawings

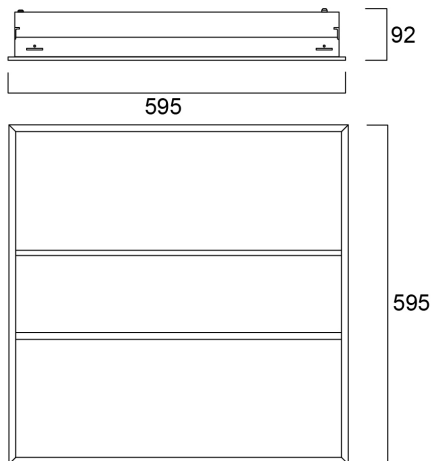

### Data table

#### GENERAL DATA

Product name	OFFICELYTE 600 3000K HE DALI
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Office, Education
Operating temperature range (°C)	5°C...+35°C
ETIM Class	EC002892
Warranty	5 years

#### OPTICAL DATA

Fixture luminous flux (lm)	3150
Luminaire efficacy (lm/W)	134
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80

# Concord

## OFFICELYTE 600 3000K HE DALI 2069514

Colour Variation Initial (SDCM)	3
Luminous Intensity (cd)	1710
Beam Angle (°)	87
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	23.5
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Drive current (mA)	650
Inrush Current (A)	10
Inrush Duration (µs)	50
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	20
Max. products per 16A C Breaker	30
Max. products per 16A B Breaker	20
Connectable conductor cross section - Max (mm <sup>2</sup> )	2.5

### LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B50	93000

# Concord

## OFFICELYTE 600 3000K HE DALI 2069514

### PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	90
Weight (kg)	4.4
Recessed Depth (mm)	90

### PACKAGING

Product EAN number	5025768695140
Packaging single length / height (cm)	67.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	61.5
DUN14 (inner)	05025768695140
Units per outer package	1
Packaging outer length / height (cm)	67.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	61.5

### SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	5-35
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No