



28PV-16041604-1: Double Backplate elbow female, build in 16x1/2"x16x1/2"

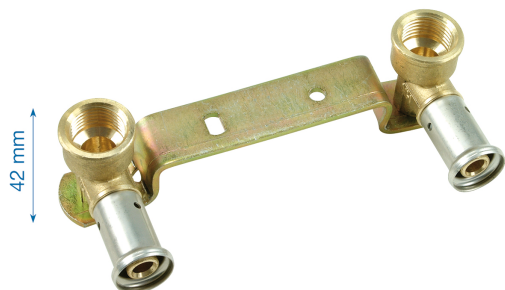

Commercial information

Messing perskoppelingen in combinatie met een muurplaat. Inbouwelement met centraafstand 153mm voor precieze en snelle installatie.

Certificates

ATG, DVGW Wasser, ETA, KIWA, ÖVGW Wasser, WRAS, KOMO, STF, ÖN EN 21003-2/-3, GOST-R, ITC, TSU, QB (CSTBat), AFNOR, ACS, PZH, DNV-GL, Sans 21003, Kontrol Biro, EMI

Applications

Potable water, Heating, Cooling, Compressed air, Sanitary

Solutions

Building installations, Industry, Utility, Shipbuilding

Technical characteristics

System specific	✓	Outer pipe diameter connection	16 Millimetre
Housing material	Brass	Distance centre-to-centre	153 Millimetre
Surface protection	Untreated	Max. operating pressure at 20 °C	16 Bar
Connection	Press sleeve	Medium temperature (continuous)	-10 70 Degrees celsius
Contour code	TH		
With connection indicator	✗		
With protective cap	✗		
DVGW quality mark for gas	✗		
DVGW quality mark for water	✓		
Compliant with NF 545	✗		
KOMO certified	✓		

Related products

Product code	GTIN	Description
BE16MINI3	05414764368514	Henco Jaw for press machine M-BMINI3 BE/TH-Profile 16mm

Image

