

Product data sheet

Item No. 93.430.2653.1

Distributor BST14I3V 2P1T SW

T-connector BST14i3, 3 pole, 1 input, 3 outputs, 50V/3A, color of coding: black



Item No.	93.430.2653.1
EAN	4015573695597
Order Unit	100 Piece(s)

Certificates / Approvals



Technical data

General

Rated current	3 A
Rated voltage	50 V
Rated impulse voltage	0.8 kV
Pollution degree	2
Mechanical coding	Yes
Interlockable	Yes
Color of coding/ contact carrier	Black
Marking of poles	

Model

Number of poles	3
Number of inputs	1
Number of outputs	2
Type of fastening	No
Degree of protection (IP)	IP20
Type of distributor	T-distributor


Material

Housing material	Polyamide
Halogen free	Yes
Contact material	Other
Insulation components continuous temperature	100 °C
Surface finish	Gilt

Dimensions

Length	37 mm
Width	13 mm
Height	34 mm

Technical drawing

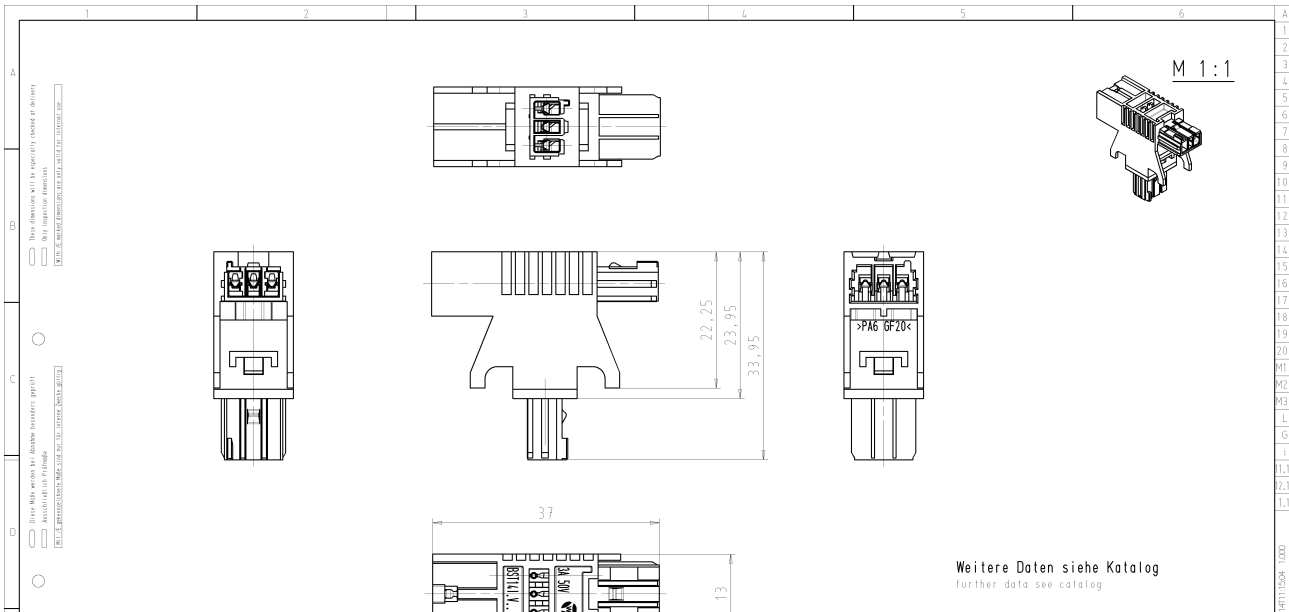

M 1:1

Weitere Daten siehe Katalog
further data see catalog

Teile-Nr. part no.	Farbe colour	Typ type
93.430.2653.0	weiß/white	BST1413V 2P1T WS
93.430.2653.1	schwarz/black	BST1413V 2P1T SW

Frei-toleranz nach DIN 7162/Tolerance system acc. to DIN 7162.
3D - Zeichnung, keine manuellen Änderungen / 3D - drawing, no manual modifications allowed.
1. Freigabe: / 1. Issued: /

Material/Material
2.01 / Tag/Date
Name
Zeichnung Nr./Drawing No.

2:1
2.01 / 04.01. / 01/01/01
T
93.430.2653.0 01K

Wieland
DISTRIBUTOR VERTEILER

Wieland
BST14... steckbar/pluggable

Änderung/Revision
Anwendung Standard / application standard