

## Features

- Surface or Suspended LED Linear luminaire with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 616x616x50mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 570x130mm, DALI Dimmable (Switch-DIM/Push-DIM enabled), Low LED flicker (+/-5%), Emergency PRO 3 hours, Neutral White (4000K) LED Colour Temperature, 3000lm, 32W, 94lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m<sup>2</sup>, Lumen Maintenance: L90B10 at 50,000 hours, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.

## Product Overview


<b>Product name</b>	RANA LED S 600 LO 4K LOUV+PRI DALI EMPRO W G2
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling surface mounting, Suspended
<b>Fixture luminous flux (lm)</b>	3000
<b>Luminaire efficacy (lm/W)</b>	94
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 19
<b>Photobiological Risk Group</b>	RG0
<b>Luminous flux (emergency) (lm)</b>	280
<b>Total power consumption (W)</b>	32
<b>Electrical protection</b>	Class I

Light your world

## RANA LED S 600 LO 4K LOUV+PRI DALI EMPRO W G2 0051463

Control gear type	Electronic ballast
Housing colour	White
IP rating	IP20
IK rating	IK07
Product EAN number	5410288514635
Warranty	5 years

### Photometry

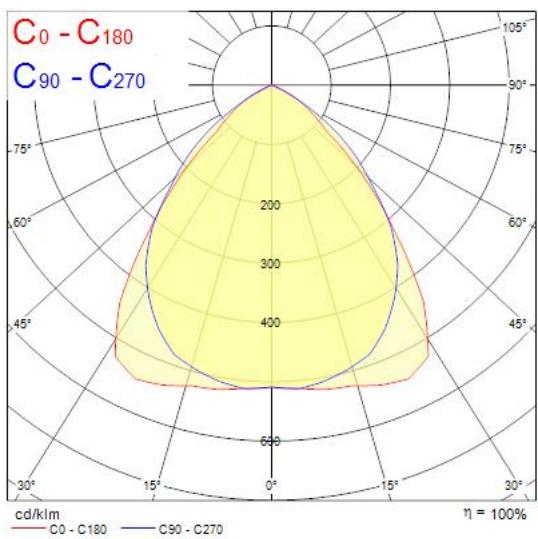

### Technical drawings

