
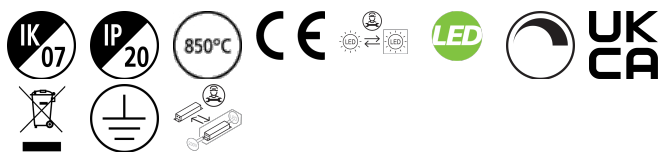


RANA LED Surface 600
RANA LED S 600 HO 3K LOUV+PRI 1-10 W GEN2
0051467



PRODUCT OVERVIEW

Product name	RANA LED S 600 HO 3K LOUV+PRI 1-10 W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Warranty	5 years
Fixture luminous flux (lm)	4300
Luminaire efficacy (lm/W)	108
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	40
Electrical protection	Class I
Control gear type	LED driver constant current
Housing colour	White
IP rating	IP20
IK rating	IK07
Product EAN number	5410288514673

DATA TABLE

General data	
Product name	RANA LED S 600 HO 3K LOUV+PRI 1-10 W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Performance ambient temperature Tq (°C)	25

RANA LED Surface 600

RANA LED S 600 HO 3K LOUV+PRI 1-10 W GEN2

0051467

Warranty	5 years
----------	---------

Optical data

Fixture luminous flux (lm)	4300
Luminaire efficacy (lm/W)	108
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	40
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.95
Electrical protection	Class I
Control gear type	LED driver constant current
Drive current (mA)	275
Inrush Current (A)	45
Inrush Duration (µs)	100
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	31
Max. products per 20A B Breaker	37
Connectable conductor cross section - Min (mm²)	2.5
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B50	50000
Lifespan L70 B10	50000
Lifespan L80 B50	50000
Lifespan L80 B10	50000
Lifespan L90 B50	50000
Lifespan L90 B10	50000

Physical data


Housing colour	White
IP rating	IP20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	616
Nominal Product Width (mm)	616
Weight (kg)	4.9

RANA LED Surface 600
RANA LED S 600 HO 3K LOUV+PRI 1-10 W GEN2
0051467

Packaging

Single packaging type	Carton
Product EAN number	5410288514673
Packaging single width (cm)	6.5
Packaging single depth (cm)	64.5
DUN14 (outer)	05410288514673
Packaging outer length / height (cm)	67.0

PHOTOMETRY

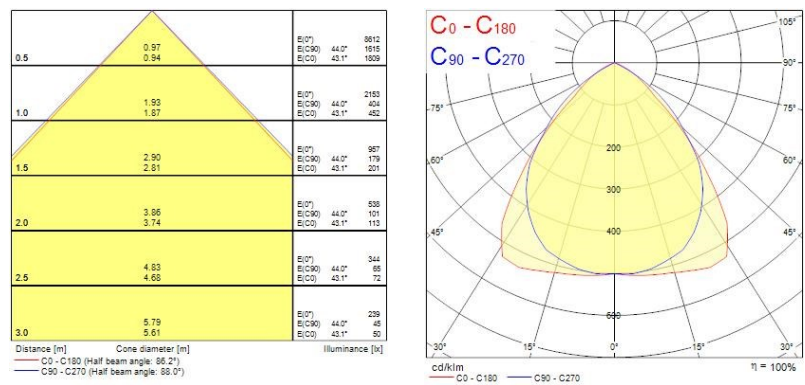

TECHNICAL DRAWINGS

