


Walraven RapidStrut® Slide Nut (BUP1000)

(H2415)

to connect construction parts to the rail

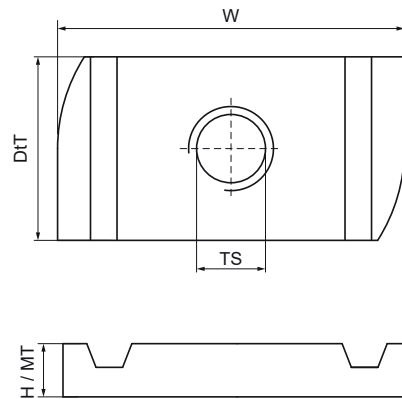

Features & benefits

- for all types of Walraven RapidStrut® Rail
- for tight fixing of accessories (e.g. connectors) on rail
- material: steel 1.0332
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- M10 & M12 tested for fire safety according to EN 1366-1.
- Tested values in combination with Walraven RapidStrut® Rail 41x41x2.5mm.



Product Number	NRF Number	For Rail Type	Thread Size	Material Thickness	Torque Moment For Installation	Maximum Allowed Load Fax	Maximum Allowed Load Faz	Total Height	Total Width	Total Depth
Reference Letter			TS	MT	T _{inst.}	F _{a,x}	F _{a,z}	H	W	DtT
Unit description				mm	Nm	N	N	mm	mm	mm
65188006	3485862	41x21, 41x41, 41x51, 41x62, 41x82	M6	5.00	7	950	2,660	5	34	19
65188008	3485863	41x21, 41x41, 41x51, 41x62, 41x82	M8	6.00	25	2,200	4,500	6	34	19
65188010	3485864	41x21, 41x41, 41x51, 41x62, 41x82	M10	9.00	40	2,550	5,000	9	34	19
65188012	3485865	41x21, 41x41, 41x51, 41x62, 41x82	M12	9.00	50	2,950	5,000	9	34	19