



PHOTOMETRIC LIGHT REPORT

Post top light | silver | 12/20/30/40W | 2700K/3300K/4000K

Article number: 220-042



Go to the
webshop
of Tronix
Lighting



TRONIX

220-042 Post top light | silver | 12/20/30/40W | 2700K/3300K/4000K

Introduction

Purpose of this Document

This document provides accurate and objective photometric data for Tronix Lighting item 220-042. All information is based on actual measurements taken from standard production units. No modifications were made to enhance performance results. In some cases, minor adjustments—such as temporary removal of covers, cables, or mounting features—were necessary for testing purposes. These did not influence product performance.

Test Methodology

Testing was conducted using randomly selected, unopened samples from regular inventory. All tests comply with the LM-79-19 standard, the recognized method for photometric and electrical measurements of LED and OLED luminaires. This standard, an update of IES LM-79-2008, outlines environmental test conditions, stabilization procedures, measurement methods, and approved instruments. It uses absolute photometry, meaning results directly reflect the performance of the tested product, without comparison to rated lamp standards.

Product 220-042 was tested using:

- A photogoniometer to measure luminous intensity distribution at various angles
- An integrating sphere to determine total luminous flux and colour characteristics

Compliance & Certification

Item 220-042 meets the requirements of the following EU directives. Tronix Lighting certifies that all relevant tests were executed in accordance with the applicable standards, and the CE mark is applied accordingly:

- General Product Safety – Directive 2023/988/EC
- Low Voltage Directive (LVD) – Directive 2014/35/EU
- Electromagnetic Compatibility (EMC) – Directive 2004/108/EC
- Ecodesign – Directive 2009/125/EC
- RoHS 3 – Directive 2011/65/EU + Amendment 2015/863/EU

Recycling & Sustainability

Tronix Lighting is affiliated with national recycling systems for electrical and electronic waste. The luminaire is over 90% recyclable when disposed of as electronic waste at end of life. In addition, Tronix Lighting participates in national packaging recycling schemes, ensuring full compliance with both the WEEE and packaging directives.

220-042 Post top light | silver | 12/20/30/40W | 2700K/3300K/4000K

Laboratory and equipment

Laboratory owner and location	Tronix Lighting BV. Uden. The Netherlands
Gonio spectrometer system and type	Viso Systems Type C. horizontal
Spectrometer manufacturer and model	(Gonio) Ocean Optics STS VIS (Sphere) Admesy HERA VIS 380–780nm
Flicker meter manufacturer and model	Viso Systems LabFlicker
Oscilloscope manufacturer and model	Tektronix MDO3024 oscilloscope (4 Channels. 200 MHz)
Power meter manufacturer and model	Vitretek PA900 Precision Multi-Channel Harmonic Power Analyzer
Power source manufacturer and model	(DC) Keithley Source Measure Unit SMU-2420 3A DC Source Meter (AC) Chroma 61601 AC Source
Datalogger Manufacturer and Model	Omega 8-Channel Thermocouple Thermometer/Data Logger

Measurement conditions gonio spectrometer

Number of C-planes and Resolution	2 planes – 180°
γ (gamma)-Resolution	4.5°
Test Distance	1.81 m
Room Temperature and Humidity	22°C +/- 10% – RH 50% +/- 20%
Input Power. Power and Displacement Factors	38.9 W – PF 0.96 – DPF 0.97
Frequency of Input Power	50 Hz
Warm-up Time and Variation	Lamp stabilized in 15 min 4 sec --1.3%

Tested light source

Manufacturer and Order Code	Tronix Lighting – 220-042
Product Description	Post top light silver 12/20/30/40W 2700K/3300K/4000K

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)	3288 lm – 15.78% / 84.22%
Efficiency	84 lm/W
Energy efficiency class	G
Peak Intensity and Beam Angle	597 cd – 162.8°
Correlated Colour Temperature	CCT = 3445 K
Colour Shift. CIE duv	Duv -0.0024
Colour Rendering Index	CRI 73.7
Colour Rendering TM30-18	R _f 75.4 – R _g 94.2
Television Lighting Consistency Index	TLCI = 48
Flicker	SVM 3.04 – PstLM 0.27

220-042 Post top light | silver | 12/20/30/40W | 2700K/3300K/4000K

Electrical measurement details

Input Power


RMS Input voltage feed. V_{RMS} 228 V
 RMS Input current feed. I_{RMS} 0.178 A
 Total input power 38.9 W

Frequency of input power 50 Hz
 Power factor 0.96
 Displacement power factor 0.97

Total harmonic distortion of the current 15.05%
 Total harmonic distortion of the voltage 2.68%

Input Power Curve

Voltage - Current

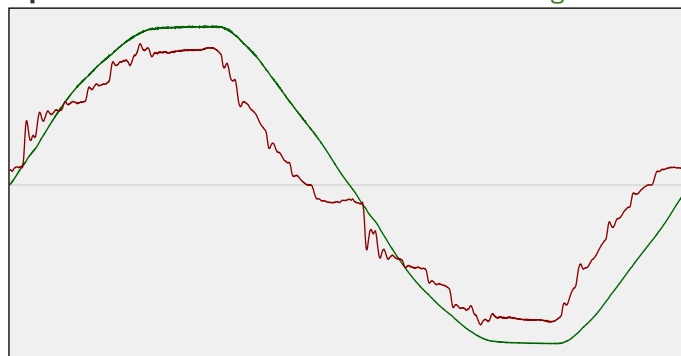

Efficiency

Radiated power efficiency: 24.4%




Lumen efficiency: 84 lm/W



Harmonics

3rd Harmonic 12.24%
 5th Harmonic 5.42%
 7th Harmonic 3.26%
 9th Harmonic 4.25%
 11th Harmonic 1.75%

Current Harmonics %

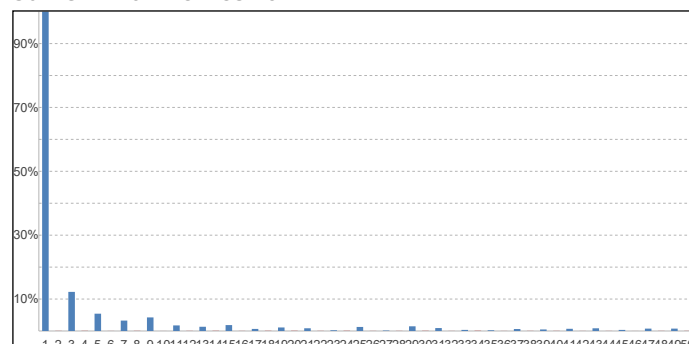

Stabilization Details

Warm-up Conditions

Stable period 15 min
 Stable change max 2.0%
 Minimum warm-up time 15 min

Colour temperature change during warm-up

15 min CCT start 3438 K
 2.0% CCT shift +7 K
 15 min CCT end 3445 K

Warm-up Results

Total warmup time Lamp stabilized in 15 min 4 sec
 Warmup variation -1.3%

Output intensity change during warm-up

Output start 3325 lm
 Output change -37 lm
 Output end 3288 lm


220-042 Post top light | silver | 12/20/30/40W | 2700K/3300K/4000K

Colour measurement details


Total lumen output 3288 lm
 Correlated Colour Temperature 3445 K
 Colour coordinates CIE 1931 (x;y) = (0.406;0.386)
 Colour deviation from BBL Duv = -0.0024

TM30-18 Colour Fidelity Index R_f 75.4
 TM30-18 Colour Gamut Index R_g 94.2
 Colour Rendering Index (Ra) CRI 73.7
 Colour Rendering Index. (red component) R_9 = -25.8


Colour Quality Scale CQS = 72.2
 Television Lighting Consistency Index TLCI = 48

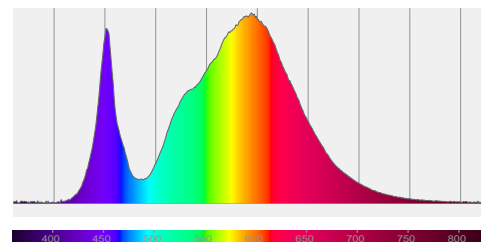

Relative spectral power distribution

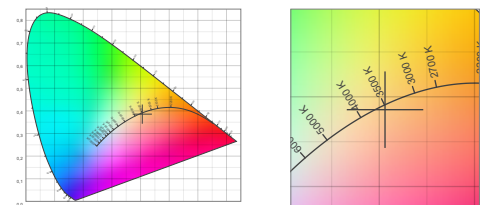

TM30 details

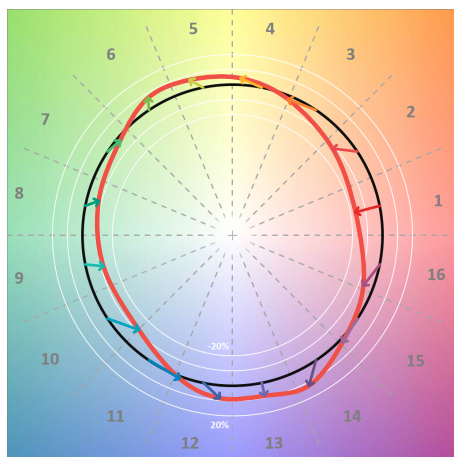


TM30 Colour vectors per hue bin




TM30 Colour distortion


		Shifts (%)	
Hue Bin	R_f	Chroma	Hue
C1	72	-17%	-1%
C2	71	-13%	11%
C3	62	-4%	19%
C4	76	3%	15%
C5	86	7%	8%
C6	86	7%	-4%
C7	83	-3%	-11%
C8	85	-8%	-5%
C9	81	-12%	4%
C10	67	-13%	18%
C11	65	-1%	24%
C12	72	8%	13%
C13	85	9%	0%
C14	77	12%	-13%
C15	74	0%	-19%
C16	72	-8%	-16%

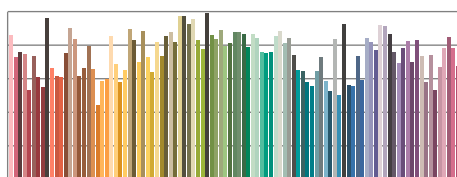

TM30-18 R_f -values per reference colour

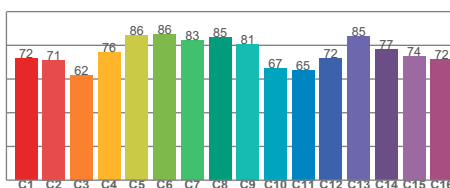


TM30-18 R_f -values per hue bin

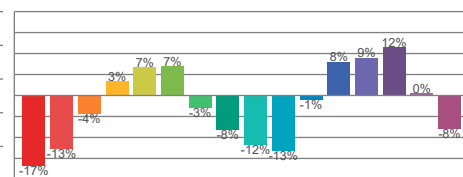


TM30 Chroma shift

Colour Quality details

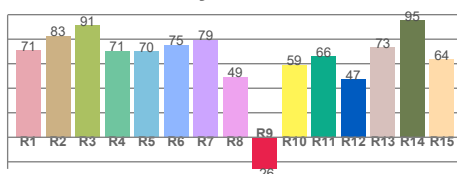

Colour Rendering Index

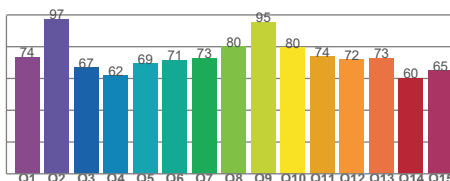

Colour Quality Scale

220-042 Post top light | silver | 12/20/30/40W | 2700K/3300K/4000K

Flicker / temporal light artefacts details

Measurement conditions

Flicker meter type	Viso Systems LabFlicker
Flicker/TLA sample rate	20000 samples/s
Measurement time	5x 180 seconds (15 minutes) for PstLM. 1.2 sec for all other indices

Flicker indices according to Illuminating Engineering Society (IES)


Flicker frequency	100 Hz
Percent flicker	74.03 %
Flicker index	0.25

TLA indices (according IEC TR 61547-1, EN 61000-3-3 and EN 61000-4-15)


An LED luminaire is considered flicker-free if the SVM value is ≤ 0.4 and if the PstLM value is ≤ 1.0

PstLM value ($F < 80$ Hz)	0.27
SVM value ($80 < F < 2000$ Hz)	3.04


Flicker frame (one flicker period in time domain)

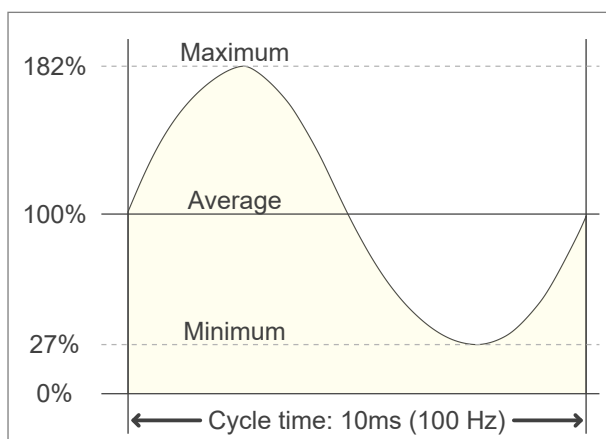

Flicker FFT (flicker curve in frequency domain)

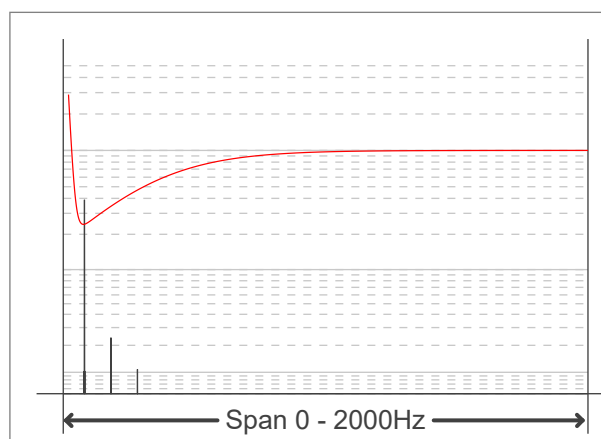

IEEE 1789-2015 Lighting Flicker Risk Zones

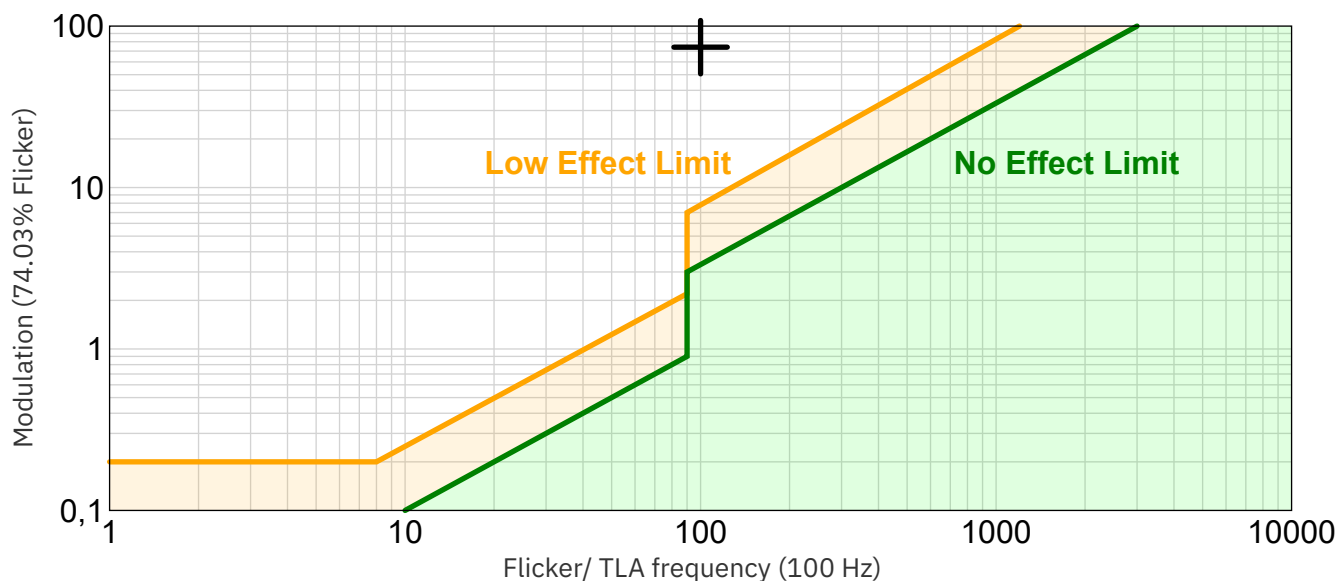


Document revision date: 1-7-2025 Measurement serial: VFR-250701-9976-SW

220-042 Post top light | silver | 12/20/30/40W | 2700K/3300K/4000K

Beam angle

Luminous Intensity diagram

Unit: 0-100% of peak intensity

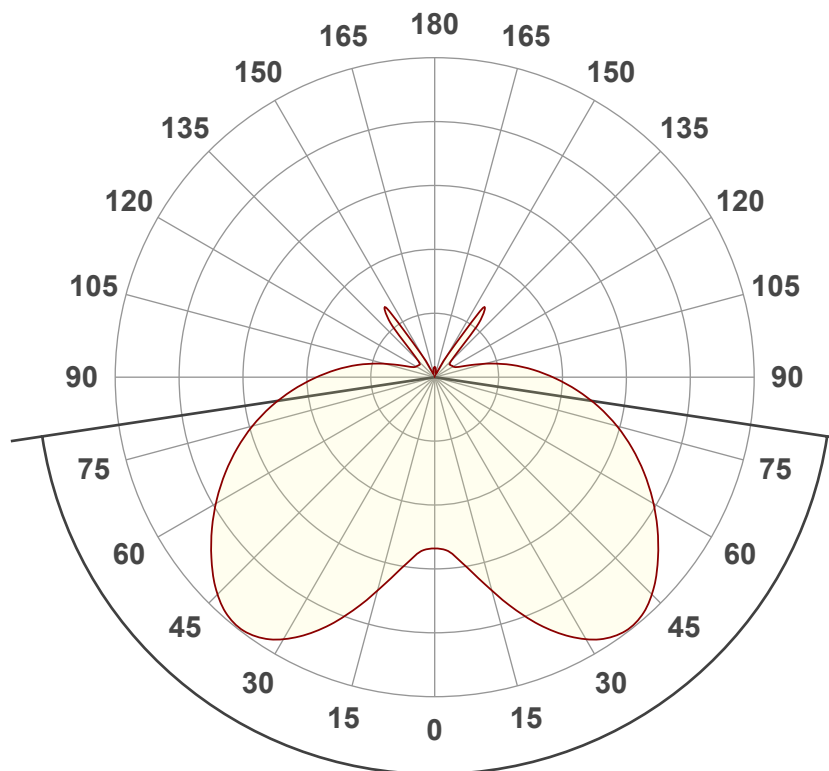

162,8°

Main Values

Output (total Lumen)	3288 lm
Lumen Up/Down	15.78% / 84.22%
Peak Intensity	597 cd
Beam Angle (50%)	162.8°
Beam Angle (90%)	162.8°
Beam Angle (10%)	162.8°

Cut-off Angle

Average 2.5%	360°
--------------	------

Field Angle

Average 10%	298.5°
-------------	--------


Intensity Ratio

In 120° cone	50.8%
In 90° cone	30.0%

C planes

C000-C180
C090-C270


Linear distribution diagram - Intensity (candela) vs γ-angle

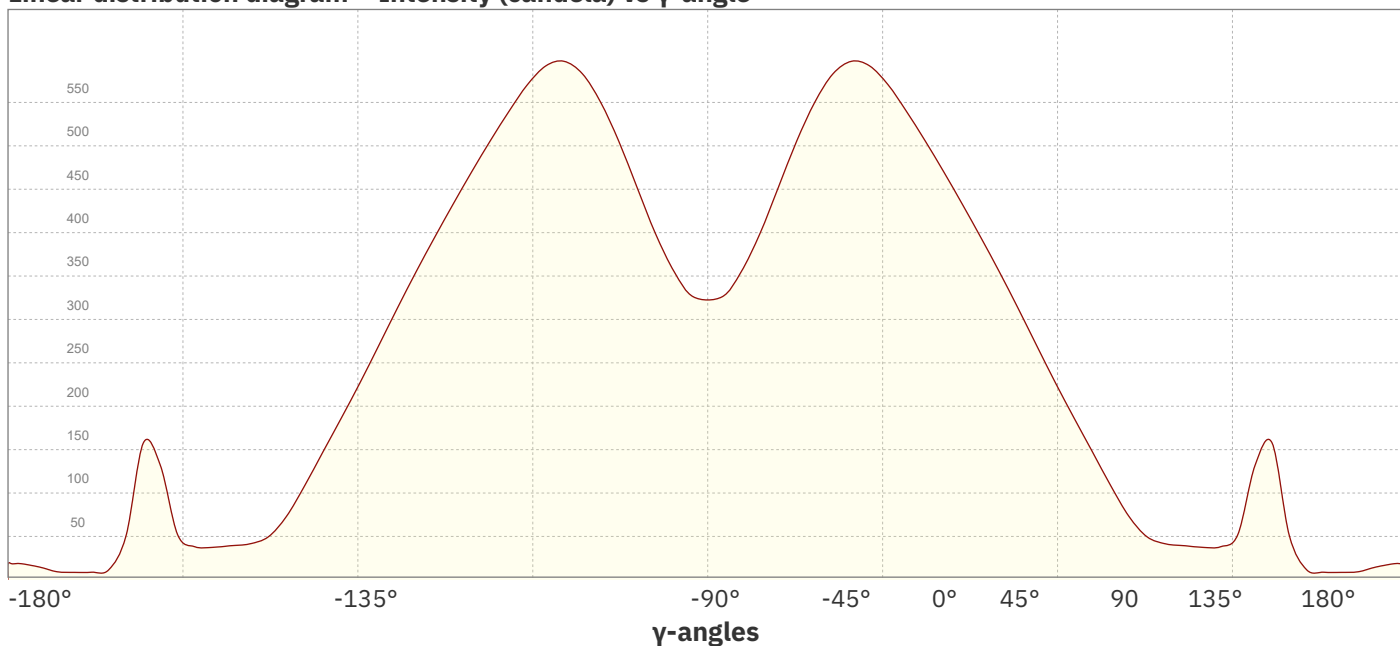

Document revision date: 1-7-2025 Measurement serial: VFR-250701-9976-SW

220-042 Post top light | silver | 12/20/30/40W | 2700K/3300K/4000K

Beam Details

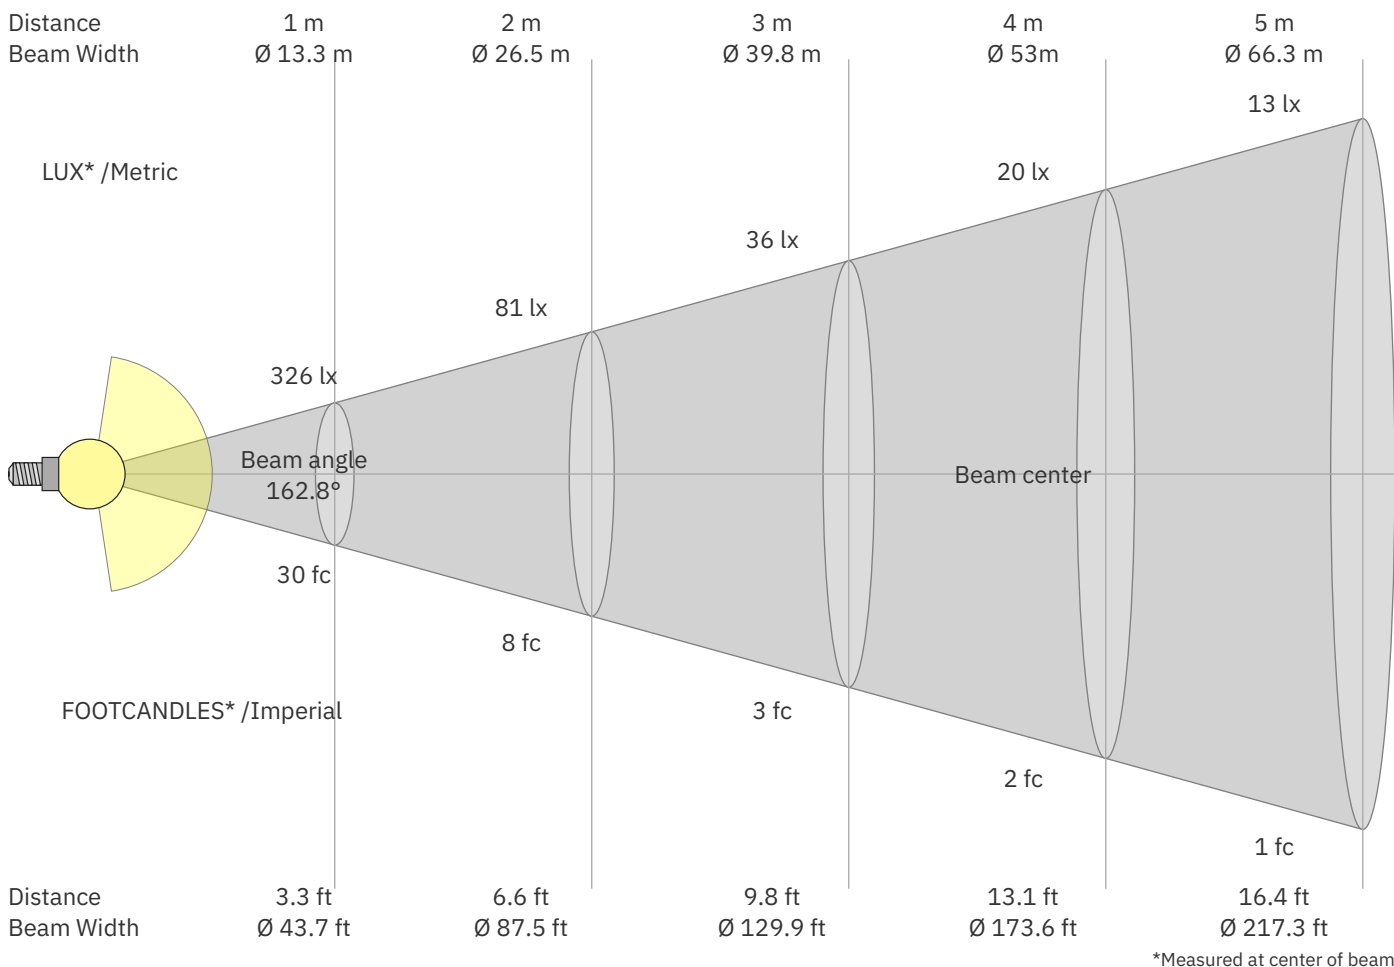

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
326	81	36	20	13	9	7	5	4	3	3	2	2	2	1	1	1	1	1	1	lux
30.3	7.6	3.4	1.9	1.2	0.8	0.6	0.5	0.4	0.3	0.3	0.2	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.1	fc

Intensities in 0° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
326	358	450	545	594	577	519	452	380	302	222	147	76	43	38	48	151	21	9	14	cd
100%	110%	138%	167%	182%	177%	159%	139%	117%	93%	68%	45%	23%	13%	12%	15%	46%	6%	3%	4%	of 0°val

Intensities in 90° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
326	358	450	545	594	577	519	452	380	302	222	147	76	43	38	48	151	21	9	14	cd
100%	110%	138%	167%	182%	177%	159%	139%	117%	93%	68%	45%	23%	13%	12%	15%	46%	6%	3%	4%	of 0°val

Intensities in 180° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
326	358	450	545	594	577	519	452	380	302	222	147	76	43	38	48	151	21	9	14	cd
100%	110%	138%	167%	182%	177%	159%	139%	117%	93%	68%	45%	23%	13%	12%	15%	46%	6%	3%	4%	of 0°val

Intensities in 270° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
326	358	450	545	594	577	519	452	380	302	222	147	76	43	38	48	151	21	9	14	cd
100%	110%	138%	167%	182%	177%	159%	139%	117%	93%	68%	45%	23%	13%	12%	15%	46%	6%	3%	4%	of 0°val

220-042 Post top light | silver | 12/20/30/40W | 2700K/3300K/4000K

Light Planning – UGR table

Uncorrected, comprehensive UGR table according to CIE 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	15.3	16.5	15.8	17.1	17.6	15.3	16.5	15.8	17.1	17.6
	3H	17.1	18.3	17.7	18.8	19.4	17.1	18.3	17.7	18.8	19.4
	4H	17.9	19.1	18.5	19.6	20.2	17.9	19.1	18.5	19.6	20.2
	6H	18.8	19.8	19.3	20.4	21.0	18.8	19.8	19.3	20.4	21.0
	8H	19.1	20.2	19.7	20.7	21.4	19.1	20.2	19.7	20.7	21.4
	12H	19.4	20.5	20.0	21.0	21.8	19.4	20.5	20.0	21.0	21.8
4H	2H	15.9	17.1	16.6	17.7	18.2	15.9	17.1	16.6	17.7	18.2
	3H	18.0	19.1	18.6	19.6	20.3	18.0	19.1	18.6	19.6	20.3
	4H	18.9	20.1	19.6	20.5	21.3	18.9	20.1	19.6	20.5	21.3
	6H	19.9	20.8	20.6	21.4	22.1	19.9	20.8	20.6	21.4	22.1
	8H	20.3	21.1	21.0	21.8	22.4	20.3	21.1	21.0	21.8	22.4
	12H	20.8	21.4	21.4	22.1	22.8	20.8	21.4	21.4	22.1	22.8
8H	4H	19.3	20.1	20.0	20.8	21.4	19.3	20.1	20.0	20.8	21.4
	6H	20.5	21.1	21.2	21.9	22.6	20.5	21.1	21.2	21.9	22.6
	8H	21.1	21.7	21.8	22.4	23.3	21.1	21.7	21.8	22.4	23.3
	12H	21.7	22.2	22.4	22.9	23.7	21.7	22.2	22.4	22.9	23.7
12H	4H	19.4	20.1	20.1	20.7	21.5	19.4	20.1	20.1	20.7	21.5
	6H	20.7	21.2	21.4	22.0	22.8	20.7	21.2	21.4	22.0	22.8
	8H	21.3	21.8	22.1	22.5	23.4	21.3	21.8	22.1	22.5	23.4
Variations with the observer position for the luminaire spacings. S:											
S = 1.0H		0.1 / -0.1					0.1 / -0.1				
S = 1.5H		0.1 / -0.1					0.1 / -0.1				
S = 2.0H		0.2 / -0.3					0.2 / -0.3				

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	115	115	115	115	111	111	111	111	102	102	102	95	95	95	88	88	88	84
1	101	94	89	83	96	91	85	81	83	79	75	77	73	70	70	68	65	62
2	90	80	71	64	86	76	69	62	70	64	58	64	59	54	59	55	51	48
3	81	68	59	51	77	65	57	49	60	53	47	55	49	44	50	45	41	38
4	73	59	49	42	69	57	48	40	52	44	38	48	41	36	44	38	34	31
5	67	52	42	35	63	50	41	34	46	38	32	42	35	30	39	33	28	26
6	61	46	36	29	58	44	35	29	41	33	27	38	31	26	35	29	24	22
7	56	41	32	25	53	40	31	25	37	29	23	34	27	22	31	25	21	18
8	52	37	28	22	49	36	27	21	33	26	20	31	24	19	28	23	18	16
9	48	34	25	19	46	33	24	19	30	23	18	28	22	17	26	20	16	14
10	45	31	23	17	43	30	22	17	28	21	16	26	20	15	24	18	14	12