

Colossal 400 Prismatic

COLOSSAL 400mm 840 PRISM DIR+HAL WHITE DALI EM

2071149



Product features

- 400mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with PMMA prismatic diffuser. Direct/indirect (halo) light distribution, 2015lm luminuous flux, 16W system power, 126lm/W luminiaire efficacy. DALI dimmable. 3 hours integrated emergency. Colour rendering index Ra >80, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40, IK03. 350mA drive current. UGR 19. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.



PRODUCT OVERVIEW

|                                 |                                                |
|---------------------------------|------------------------------------------------|
| Product name                    | COLOSSAL 400mm 840 PRISM DIR+HAL WHITE DALI EM |
| Technology                      | LED (3 SDCM)                                   |
| Cap/Base                        | N/A                                            |
| Housing                         | Aluminium                                      |
| Mount                           | Suspended                                      |
| General application             | Hospitality, Office                            |
| ETIM Class                      | EC002892                                       |
| Warranty                        | 5 years                                        |
| Fixture luminous flux (lm)      | 2015                                           |
| Luminaire efficacy (lm/W)       | 119                                            |
| Colour temperature (K)          | 4000                                           |
| Colour Code                     | 840                                            |
| Light colour                    | Neutral White                                  |
| CRI (Ra)                        | 80                                             |
| Colour Variation Initial (SDCM) | SDCM3                                          |
| Glare control                   | < 19                                           |
| Photobiological Risk Group      | RG0                                            |
| Total power consumption (W)     | 16.9                                           |
| Electrical protection           | Class I                                        |
| Control gear type               | LED driver constant current                    |
| Dimmable                        | Yes                                            |
| Dimming method                  | DALI-2                                         |
| LED Flickering Rate             | Ultra low (5% or less)                         |
| Housing colour                  | RAL 9016 - Traffic white / Bezel               |
| IP rating                       | IP40/20                                        |
| IK rating                       | IK07                                           |
| Product EAN number              | 5025768711499                                  |

DATA TABLE

|              |                                                |
|--------------|------------------------------------------------|
| General data |                                                |
| Product name | COLOSSAL 400mm 840 PRISM DIR+HAL WHITE DALI EM |

# Colossal 400 Prismatic

*COLOSSAL 400mm 840 PRISM DIR+HAL WHITE DALI EM*  
2071149

|                                  |                     |
|----------------------------------|---------------------|
| Technology                       | LED (3 SDCM)        |
| Cap/Base                         | N/A                 |
| Housing                          | Aluminium           |
| Mount                            | Suspended           |
| General application              | Hospitality, Office |
| Operating temperature range (°C) | 10°C...+25°C        |
| ETIM Class                       | EC002892            |
| Warranty                         | 5 years             |

## Optical data

|                                 |               |
|---------------------------------|---------------|
| Fixture luminous flux (lm)      | 2015          |
| Luminaire efficacy (lm/W)       | 119           |
| Colour temperature (K)          | 4000          |
| Colour Code                     | 840           |
| Light colour                    | Neutral White |
| CRI (Ra)                        | 80            |
| Colour Variation Initial (SDCM) | SDCM3         |
| Distribution type               | Symmetric     |
| Glare control                   | < 19          |
| Photobiological Risk Group      | RG0           |
| Emergency duration (h)          | 3             |

## Electrical data

|                                                                |                             |
|----------------------------------------------------------------|-----------------------------|
| Total power consumption (W)                                    | 16.9                        |
| Primary Supply/Product voltage - min (V)                       | 220                         |
| Primary Supply/Product voltage - max (V)                       | 240                         |
| Lamp power factor                                              | 0.95                        |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x % | 10                          |
| Electrical protection                                          | Class I                     |
| Control gear required                                          | No                          |
| Control gear type                                              | LED driver constant current |
| Dimmable                                                       | Yes                         |
| Dimming method                                                 | DALI-2                      |
| Drive current (mA)                                             | 350                         |
| Inrush Current (A)                                             | 20                          |
| Inrush Duration (µs)                                           | 200                         |
| Glow Wire Test (°C)                                            | 650                         |
| Energy Efficiency Class (A->G) of contained light source       | B                           |
| Nominal Frequency (Hz)                                         | 50/60Hz                     |
| LED Flickering Rate                                            | Ultra low (5% or less)      |
| Max. products per 10A C Breaker                                | 31                          |
| Max. products per 13A C Breaker                                | 39                          |
| Max. products per 16A C Breaker                                | 51                          |
| Max. products per 20A C Breaker                                | 62                          |
| Max. products per 10A B Breaker                                | 18                          |
| Max. products per 16A B Breaker                                | 30                          |
| Max. products per 20A B Breaker                                | 37                          |

## Colossal 400 Prismatic

COLOSSAL 400mm 840 PRISM DIR+HAL WHITE DALI EM  
2071149

|                                                 |     |
|-------------------------------------------------|-----|
| Connectable conductor cross section - Min (mm²) | 1.5 |
| Connectable conductor cross section - Max (mm²) | 2.5 |

### Lifetime data

|                  |        |
|------------------|--------|
| Lifespan L70 B50 | 170000 |
| Lifespan L80 B20 | 145000 |
| Lifespan L90 B10 | 66000  |

### Physical data

|                               |                                  |
|-------------------------------|----------------------------------|
| Housing colour                | RAL 9016 - Traffic white / Bezel |
| IP rating                     | IP40/20                          |
| IK rating                     | IK07                             |
| Diffuser finish               | Prismatic                        |
| Diffuser material             | PMMA Acrylic                     |
| Nominal Product Height (mm)   | 93                               |
| Nominal Product Diameter (mm) | 400                              |
| Weight (kg)                   | 6.8                              |



### Packaging

|                                       |                |
|---------------------------------------|----------------|
| Single packaging type                 | Carton         |
| Product EAN number                    | 5025768711499  |
| Packaging single length / height (cm) | 14.0           |
| Packaging single width (cm)           | 47.0           |
| Packaging single depth (cm)           | 47.0           |
| DUN14 (outer)                         | 05025768711499 |
| Units per outer package               | 1              |
| Packaging outer length / height (cm)  | 14.0           |
| Packaging outer width (cm)            | 47.0           |
| Packaging outer depth (cm)            | 47.0           |

### Safety data

|                                  |       |
|----------------------------------|-------|
| Optimal operating condition (°C) | 10-25 |
|----------------------------------|-------|

## PHOTOMETRY

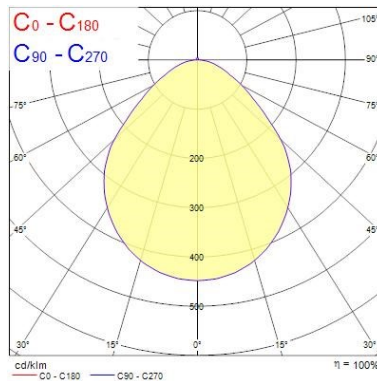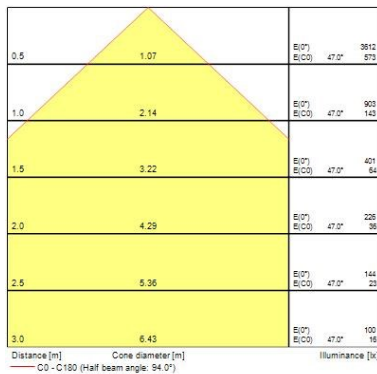

## Colossal 400 Prismatic

*COLOSSAL 400mm 840 PRISM DIR+HAL WHITE DALI EM*  
2071149

### TECHNICAL DRAWINGS

---

