



PHOTOMETRIC LIGHT REPORT

Tri-proof lightbar | 1500*Ø75.2mm | IP66 | 45W | 5000K

Article number: 950-095



Go to the
webshop
of Tronix
Lighting



TRONIX

950-095 Tri-proof lightbar | 1500*Ø75.2mm | IP66 | 45W | 5000K

Introduction

Purpose of this Document

This document provides accurate and objective photometric data for Tronix Lighting item 950-095. All information is based on actual measurements taken from standard production units. No modifications were made to enhance performance results. In some cases, minor adjustments—such as temporary removal of covers, cables, or mounting features—were necessary for testing purposes. These did not influence product performance.

Test Methodology

Testing was conducted using randomly selected, unopened samples from regular inventory. All tests comply with the LM-79-19 standard, the recognized method for photometric and electrical measurements of LED and OLED luminaires. This standard, an update of IES LM-79-2008, outlines environmental test conditions, stabilization procedures, measurement methods, and approved instruments. It uses absolute photometry, meaning results directly reflect the performance of the tested product, without comparison to rated lamp standards.

Product 950-095 was tested using:

- A photogoniometer to measure luminous intensity distribution at various angles
- An integrating sphere to determine total luminous flux and colour characteristics

Compliance & Certification

Item 950-095 meets the requirements of the following EU directives. Tronix Lighting certifies that all relevant tests were executed in accordance with the applicable standards, and the CE mark is applied accordingly:

- General Product Safety – Directive 2023/988/EC
- Low Voltage Directive (LVD) – Directive 2014/35/EU
- Electromagnetic Compatibility (EMC) – Directive 2004/108/EC
- Ecodesign – Directive 2009/125/EC
- RoHS 3 – Directive 2011/65/EU + Amendment 2015/863/EU

Recycling & Sustainability

Tronix Lighting is affiliated with national recycling systems for electrical and electronic waste. The luminaire is over 90% recyclable when disposed of as electronic waste at end of life. In addition, Tronix Lighting participates in national packaging recycling schemes, ensuring full compliance with both the WEEE and packaging directives.

950-095 Tri-proof lightbar | 1500*Ø75.2mm | IP66 | 45W | 5000K

Laboratory and equipment

Laboratory owner and location
Gonio spectrometer system and type
Spectrometer manufacturer and model

Flicker meter manufacturer and model
Oscilloscope manufacturer and model
Power meter manufacturer and model

Power source manufacturer and model

Datalogger Manufacturer and Model

Tronix Lighting BV. Uden. The Netherlands
Viso Systems Type C. horizontal
(Gonio) Ocean Optics STS VIS
(Sphere) Admesy HERA VIS 380–780nm
Viso Systems LabFlicker
Tektronix MDO3024 oscilloscope (4 Channels. 200 MHz)
Vitretek PA900 Precision Multi-Channel Harmonic Power Analyzer
(DC) Keithley Source Measure Unit SMU-2420 3A DC Source Meter
(AC) Chroma 61601 AC Source
Omega 8-Channel Thermocouple Thermometer/Data Logger

Measurement conditions gonio spectrometer

Number of C-planes and Resolution
 γ (gamma)-Resolution
Test Distance
Room Temperature and Humidity
Input Power. Power and Displacement Factors
Frequency of Input Power
Warm-up Time and Variation

4 planes – 90°
2.5°
1.81 m
22°C +/- 10% – RH 50% +/- 20%
43.3 W – PF 0.93 – DPF 0.94
50.1 Hz
Lamp stabilized in 32 min 26 sec --3.1%

Tested light source

Manufacturer and Order Code
Product Description

Tronix Lighting – 950-095
Tri-proof lightbar | 1500*Ø75.2mm | IP66 | 45W | 5000K

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)
Efficiency
Energy efficiency class
Peak Intensity and Beam Angle
Correlated Colour Temperature
Colour Shift. CIE u_{vw}
Colour Rendering Index
Colour Rendering TM30-18
Television Lighting Consistency Index
Flicker

5674 lm – 16.09% / 83.91%
131 lm/W
E
1452 cd – 126.7°
CCT = 5305 K
Duv 0.0005
CRI 85.2
 R_f 84.7 – R_g 95.9
TLCI = 78
SVM 0.01 – PstLM 0.01

950-095 Tri-proof lightbar | 1500*Ø75.2mm | IP66 | 45W | 5000K

Electrical measurement details

Input Power


RMS Input voltage feed. V_{RMS} 233 V
 RMS Input current feed. I_{RMS} 0.201 A
 Total input power 43.3 W

Frequency of input power 50.1 Hz
 Power factor 0.93
 Displacement power factor 0.94

Total harmonic distortion of the current 16.58%
 Total harmonic distortion of the voltage 2.19%

Input Power Curve

Voltage - Current

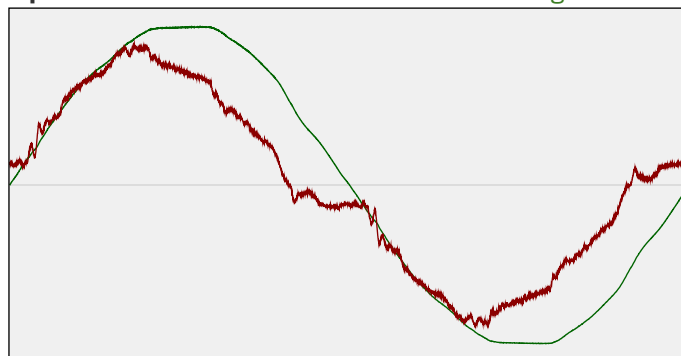

Efficiency

Radiated power efficiency: 41.7%




Lumen efficiency: 131 lm/W



Harmonics

3rd Harmonic 13.83%
 5th Harmonic 6.75%
 7th Harmonic 3.34%
 9th Harmonic 2.86%
 11th Harmonic 2.37%

Current Harmonics %

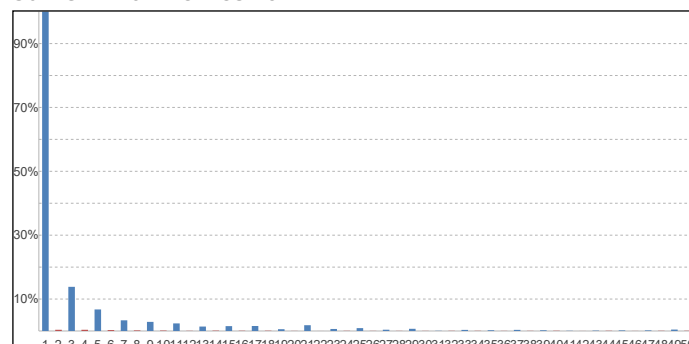

Stabilization Details

Warm-up Conditions

Stable period 15 min
 Stable change max 1.0%
 Minimum warm-up time 30 min

Colour temperature change during warm-up

CCT start 5251 K
 CCT shift +54 K
 CCT end 5305 K

Warm-up Results

Total warmup time Lamp stabilized in 32 min 26 sec
 Warmup variation -3.1%

Output intensity change during warm-up

Output start 5838 lm
 Output change -164 lm
 Output end 5674 lm


950-095 Tri-proof lightbar | 1500*Ø75.2mm | IP66 | 45W | 5000K

Colour measurement details


Total lumen output 5674 lm
 Correlated Colour Temperature 5305 K
 Colour coordinates CIE 1931 (x;y) = (0.337;0.346)
 Colour deviation from BBL Duv = 0.0005

TM30-18 Colour Fidelity Index R_f 84.7
 TM30-18 Colour Gamut Index R_g 95.9
 Colour Rendering Index (Ra) CRI 85.2
 Colour Rendering Index. (red component) $R_9 = 16.0$


Colour Quality Scale CQS = 82.1
 Television Lighting Consistency Index TLCI = 78

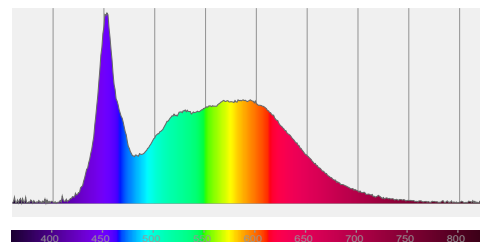

Relative spectral power distribution

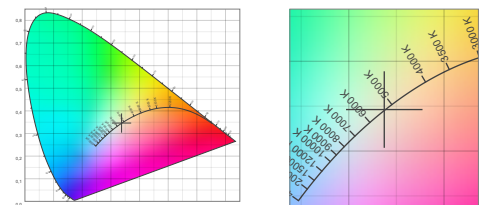

TM30 details

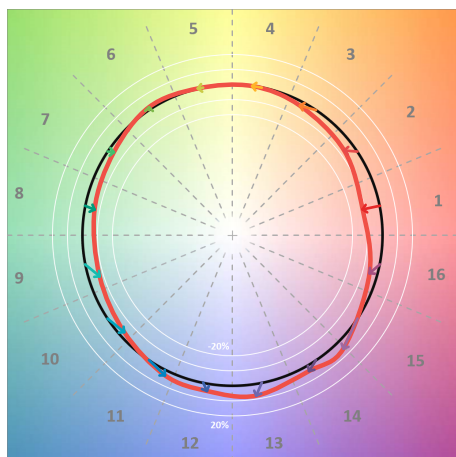


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	78	-12%	0%
C2	86	-7%	5%
C3	79	-4%	11%
C4	88	0%	7%
C5	90	0%	4%
C6	95	2%	-1%
C7	92	-4%	-2%
C8	88	-7%	1%
C9	86	-8%	10%
C10	77	-4%	14%
C11	76	3%	14%
C12	90	5%	4%
C13	87	8%	-5%
C14	86	3%	-8%
C15	75	3%	-22%
C16	85	-6%	-7%

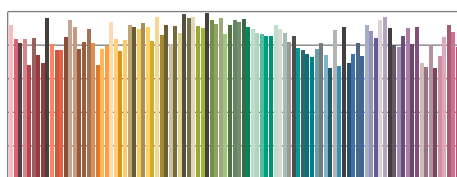

TM30-18 R_f -values per reference colour

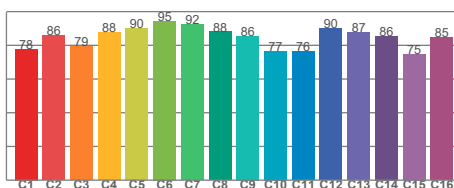


TM30-18 R_f -values per hue bin

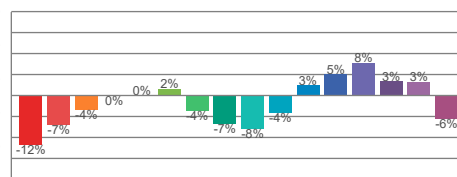


TM30 Chroma shift

Colour Quality details

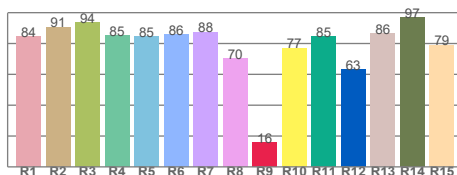

Colour Rendering Index

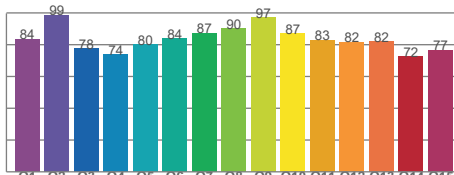

Colour Quality Scale

950-095 Tri-proof lightbar | 1500*Ø75.2mm | IP66 | 45W | 5000K

Flicker / temporal light artefacts details

Measurement conditions

Flicker meter type	Viso Systems LabFlicker
Flicker/TLA sample rate	20000 samples/s
Measurement time	5x 180 seconds (15 minutes) for PstLM. 1.2 sec for all other indices

Flicker indices according to Illuminating Engineering Society (IES)


Flicker frequency	100 Hz
Percent flicker	0.25 %
Flicker index	0

TLA indices (according IEC TR 61547-1, EN 61000-3-3 and EN 61000-4-15)


An LED luminaire is considered flicker-free if the SVM value is ≤ 0.4 and if the PstLM value is ≤ 1.0

PstLM value ($F < 80$ Hz)	0.01
SVM value ($80 < F < 2000$ Hz)	0.01


Flicker frame (one flicker period in time domain)

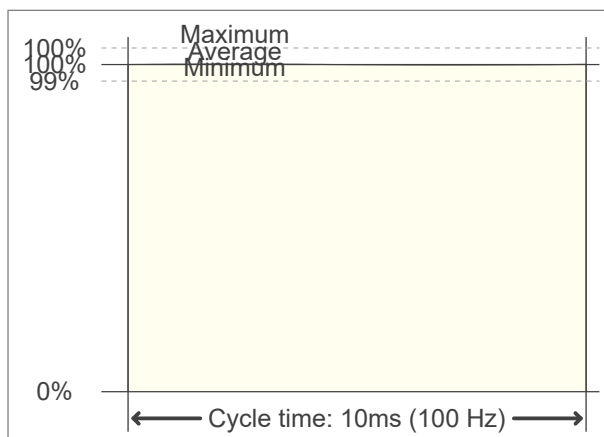

Flicker FFT (flicker curve in frequency domain)

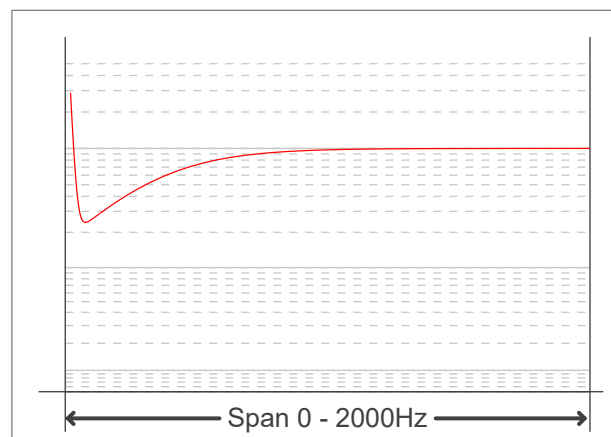

IEEE 1789-2015 Lighting Flicker Risk Zones

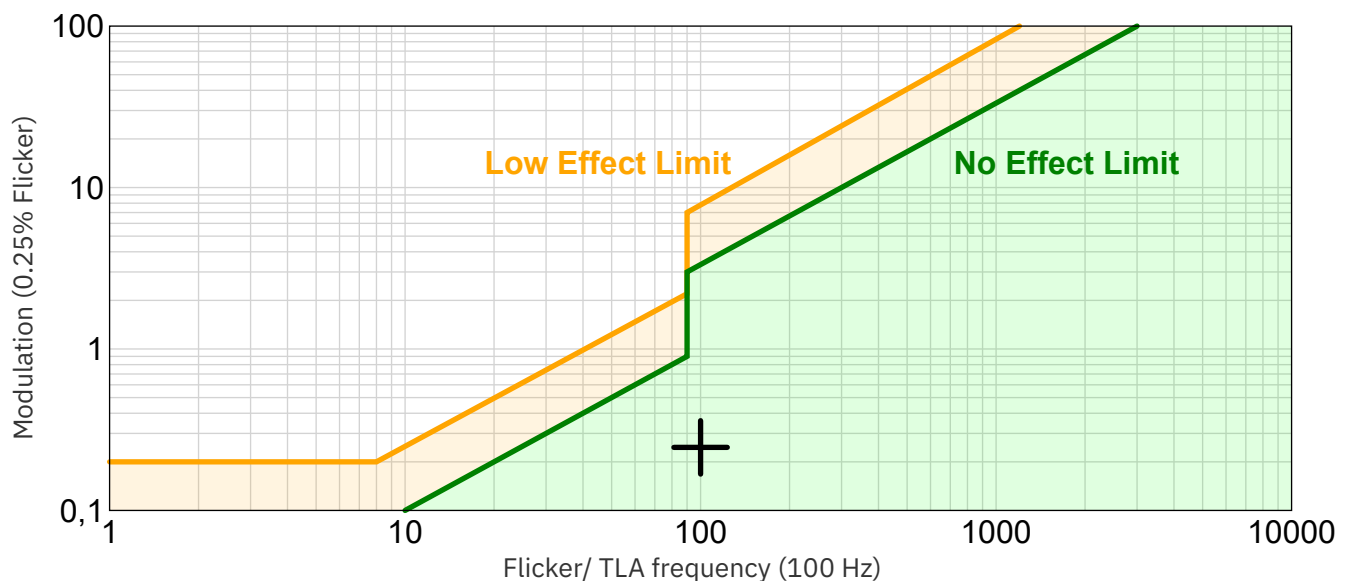


Document revision date: 17-7-2025 Measurement serial: VFR-250715-10497-SW

950-095 Tri-proof lightbar | 1500*Ø75.2mm | IP66 | 45W | 5000K

Beam angle

Luminous Intensity diagram

Unit: 0-100% of peak intensity

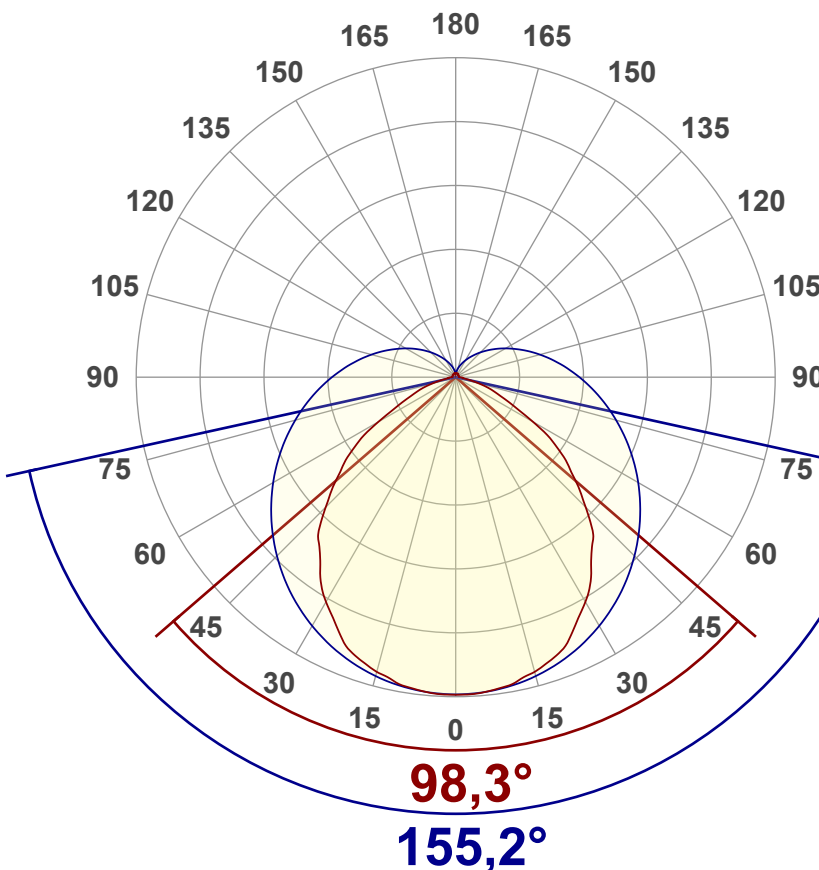

Main Values

Output (total Lumen)	5674 lm
Lumen Up/Down	16.09% / 83.91%
Peak Intensity	1452 cd
Beam Angle (50%)	126.7°
Beam Angle (90%)	155.2°
Beam Angle (10%)	98.3°

Cut-off Angle

Average 2.5%	249.9°
--------------	--------

Field Angle

Average 10%	210.4°
-------------	--------


Intensity Ratio

In 120° cone	59.2%
In 90° cone	39.9%

C planes

C000-C180
C090-C270


Linear distribution diagram - Intensity (candela) vs γ-angle

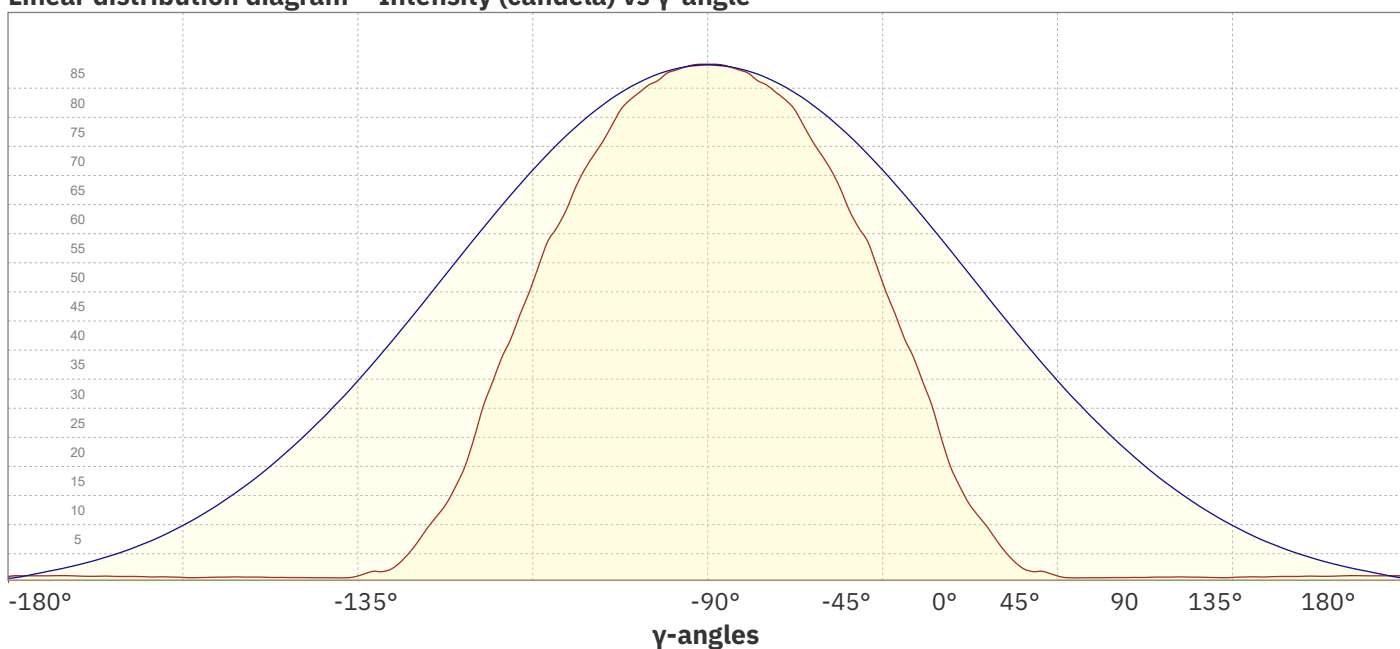

Document revision date: 17-7-2025 Measurement serial: VFR-250715-10497-SW

950-095 Tri-proof lightbar | 1500*Ø75.2mm | IP66 | 45W | 5000K

Beam Details

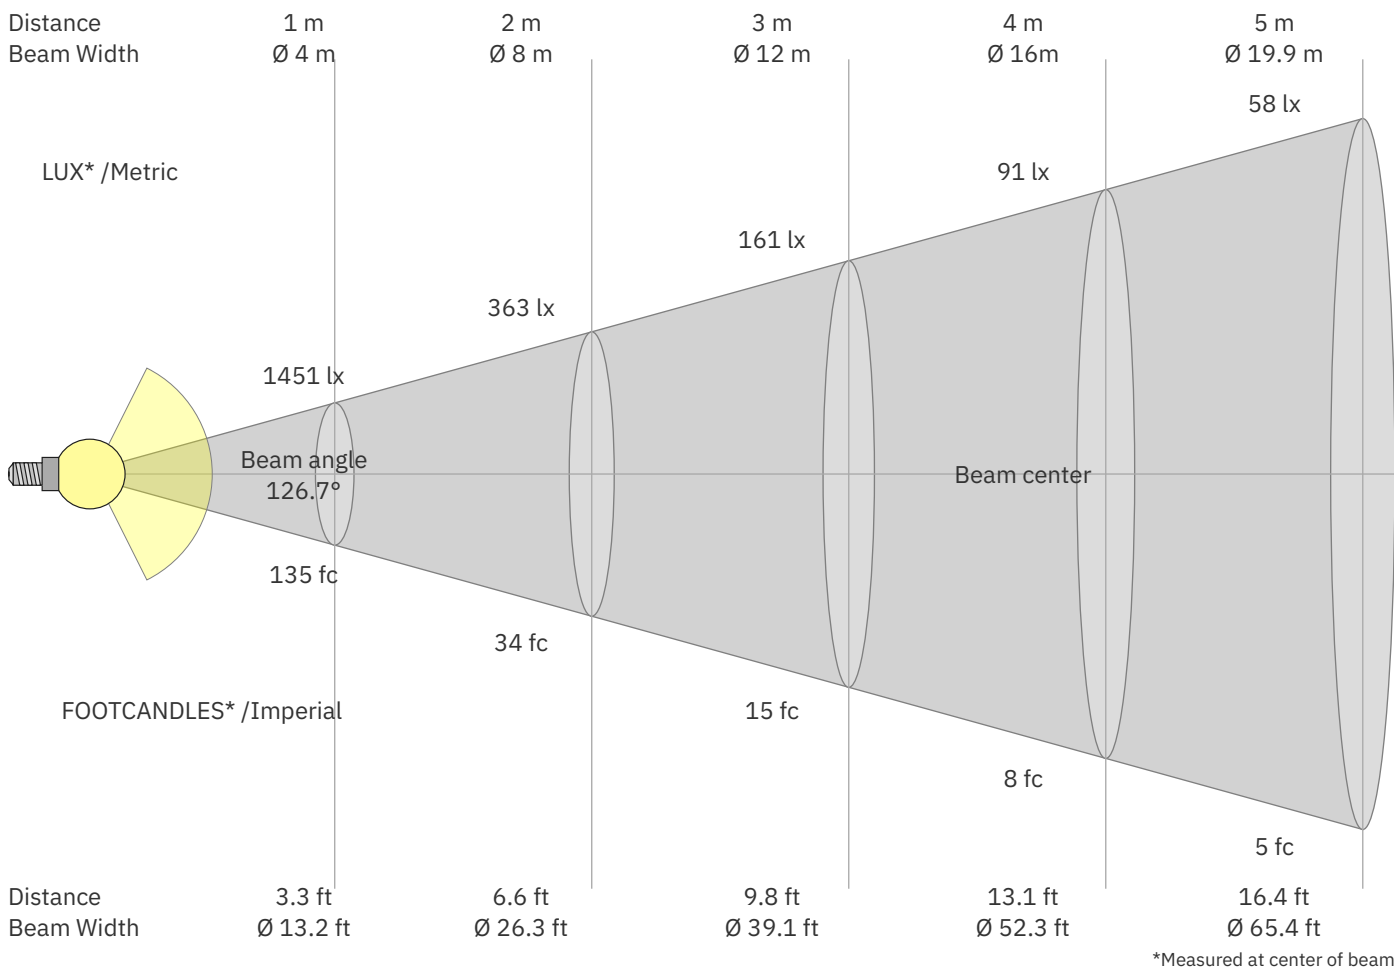

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
1451	363	161	91	58	40	30	23	18	15	12	10	9	7	6	6	5	4	4	4	lux
134.8	33.7	15	8.4	5.4	3.7	2.8	2.1	1.7	1.3	1.1	0.9	0.8	0.7	0.6	0.5	0.5	0.4	0.4	0.3	fc

Intensities in 0° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
1451	1432	1369	1235	1054	841	601	313	155	42	19	14	15	16	16	15	17	18	19	19	cd
100%	99%	94%	85%	73%	58%	41%	22%	11%	3%	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%	of 0°val

Intensities in 90° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
1451	1437	1399	1338	1256	1156	1043	923	800	680	566	462	369	287	218	161	114	78	50	29	cd
100%	99%	96%	92%	87%	80%	72%	64%	55%	47%	39%	32%	25%	20%	15%	11%	8%	5%	3%	2%	of 0°val

Intensities in 180° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
1451	1432	1369	1235	1054	841	601	313	155	42	19	14	15	16	16	15	17	18	19	19	cd
100%	99%	94%	85%	73%	58%	41%	22%	11%	3%	1%	1%	1%	1%	1%	1%	1%	1%	1%	1%	of 0°val

Intensities in 270° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
1451	1437	1399	1338	1256	1156	1043	923	800	680	566	462	369	287	218	161	114	78	50	29	cd
100%	99%	96%	92%	87%	80%	72%	64%	55%	47%	39%	32%	25%	20%	15%	11%	8%	5%	3%	2%	of 0°val

950-095 Tri-proof lightbar | 1500*Ø75.2mm | IP66 | 45W | 5000K

Light Planning – UGR table

Uncorrected, comprehensive UGR table according to CIE 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	15.8	16.9	16.3	17.5	18.0	20.0	21.1	20.5	21.6	22.2
	3H	16.3	17.4	16.9	17.9	18.5	22.4	23.6	23.0	24.1	24.6
	4H	16.4	17.5	17.1	18.1	18.6	23.8	24.9	24.4	25.4	26.0
	6H	16.5	17.5	17.1	18.0	18.7	25.4	26.3	25.9	26.9	27.6
	8H	16.5	17.5	17.1	18.0	18.7	26.2	27.2	26.8	27.7	28.4
	12H	16.5	17.4	17.0	18.0	18.7	27.1	28.1	27.7	28.6	29.3
4H	2H	16.8	17.8	17.4	18.4	19.0	20.1	21.2	20.7	21.7	22.3
	3H	17.7	18.6	18.2	19.2	19.9	22.8	23.8	23.4	24.3	25.0
	4H	17.9	18.9	18.5	19.4	20.2	24.2	25.3	24.9	25.7	26.5
	6H	18.0	18.9	18.7	19.5	20.1	25.9	26.8	26.6	27.3	28.0
	8H	18.1	18.8	18.8	19.4	20.1	26.9	27.6	27.6	28.2	28.9
	12H	18.1	18.7	18.8	19.4	20.1	27.9	28.5	28.6	29.2	29.9
8H	4H	18.8	19.5	19.5	20.1	20.8	24.3	25.0	25.0	25.6	26.3
	6H	19.2	19.7	19.9	20.5	21.2	26.1	26.7	26.8	27.4	28.2
	8H	19.3	19.8	20.1	20.6	21.4	27.2	27.6	27.9	28.4	29.3
	12H	19.4	19.9	20.2	20.6	21.4	28.3	28.8	29.1	29.5	30.3
12H	4H	19.1	19.7	19.7	20.3	21.1	24.2	24.8	24.9	25.5	26.2
	6H	19.6	20.1	20.3	20.9	21.7	26.1	26.6	26.8	27.4	28.2
	8H	19.9	20.3	20.6	21.0	21.9	27.2	27.6	27.9	28.3	29.2
Variations with the observer position for the luminaire spacings. S:											
S = 1.0H		0.1 / -0.2					0.1 / -0.1				
S = 1.5H		0.3 / -0.6					0.3 / -0.3				
S = 2.0H		0.6 / -1.2					0.6 / -0.6				

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	115	115	115	115	111	111	111	111	102	102	102	94	94	94	87	87	87	84
1	103	97	92	88	98	93	89	85	86	82	79	79	77	74	73	71	69	66
2	93	84	76	70	89	81	74	68	74	69	64	69	64	60	63	60	56	53
3	84	73	65	58	80	70	62	56	65	58	53	60	55	50	56	51	47	44
4	77	65	55	48	73	62	54	47	58	50	45	53	47	43	49	44	40	38
5	71	58	48	41	67	55	47	40	51	44	39	48	42	37	44	39	35	32
6	65	52	43	36	62	50	41	35	46	39	34	43	37	32	40	35	31	28
7	60	47	38	32	58	45	37	31	42	35	30	39	33	28	37	31	27	25
8	56	42	34	28	54	41	33	27	38	31	26	36	30	25	34	28	24	22
9	52	39	31	25	50	38	30	25	35	28	24	33	27	23	31	26	22	20
10	49	36	28	23	47	35	27	22	33	26	21	31	25	21	29	24	20	18