
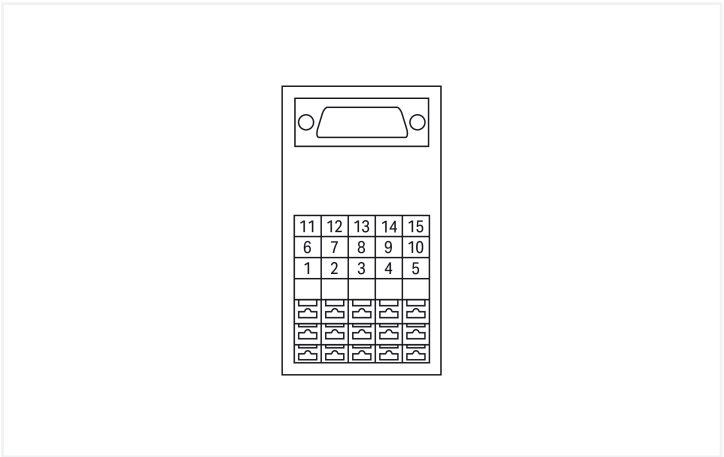


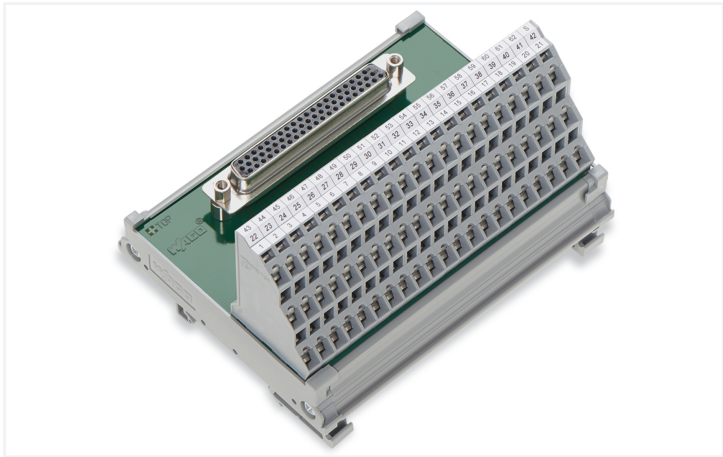

Similar to illustration

Electrical data	
Operating voltage	≤ 125 VAC/VDC
Nominal current	1 A
Contact resistance (max.)	15 mΩ
Specialty functions	With shield connection

Safety and protection	
Rated Voltage	125 V
Rated impulse withstand voltage	0.8 kV
Pollution degree	2
Protection type	IP20

Connection Data	
Performance level	3 / 50 mating cycles
Strain relief	UNC 4-40 stud bolt
Connection 1	
Pluggable connector	HD D-sub female connector
Pole number 1	15
Connection type	System
Note (conductor cross-section)	12 AWG: THHN, THWN
Mating direction	vertical

Connection 2	
Design	PCB terminal blocks (triple-deck)
Pole number	15
Connection type	Field
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 737 Series
Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG

Connection 2	
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches



Physical data		
Width		35 mm / 1.378 inches
Height		85 mm / 3.346 inches
Depth from upper-edge of DIN-rail		62 mm / 2.441 inches

Mechanical data		
Mounting type		DIN-35 rail
Housing design		Mounting carrier

Material data		
Contact material (connector)		Au over Ni
Fire load		0.579 MJ
Weight		59.1 g

Environmental requirements		
Ambient temperature (operation)		-20 ... +55 °C
Ambient temperature (storage)		-40 ... +70 °C
Relative humidity		≤ 85 % (non-condensing)

Standards and Specifications		
Standards/specifications		EN 61010-2-201

Commercial data		
Product Group		6 (INTERFACE ELECTRONIC)
PU (SPU)		8 (1) pcs
Packaging type		Box
Country of origin		DE
GTIN		4050821087144
Customs tariff number		85366990990

Product Classification		
UNSPSC		39121421
eCl@ss 10.0		27-14-11-52
eCl@ss 9.0		27-14-11-52
ETIM 9.0		EC002780
ETIM 10.0		EC002780
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant,With Exemption
RoHS Exemption		6(c)
SCIP notification number (Austria)		c95a6f35-b2f0-47c4-a664-b3658bc08d13
SCIP notification number (Belgium)		2a9229a8-3889-46a7-87b1-e3ba0d6ac5f6
SCIP notification number (Bulgaria)		d08853aa-4229-4edf-8280-af07da99eceb
SCIP notification number (Czech Republic)		b17f1923-3358-4c55-840e-a48d229ac76c
SCIP notification number (Denmark)		28c155d8-2797-4a3a-ac6b-2a5986aed160
SCIP notification number (Finland)		dadd0681-3673-4584-8799-753fa0555da8
SCIP notification number (France)		6175f76e-40b9-4a7c-bff2-898bede16ef2
SCIP notification number (Germany)		ef908b12-8079-498d-9541-2814979bdaef
SCIP notification number (Hungary)		71ee567f-fb3e-4fd9-891b-01ea7c459ff1



Environmental Product Compliance	
SCIP notification number (Italy)	a5ed5c4e-425d-4510-ad67-b5b94f458fa2
SCIP notification number (Netherlands)	f7d0b08b-9682-4811-9ef7-d530bf6cdee9
SCIP notification number (Poland)	25cb850a-9883-44c7-a15e-83e1390785e5
SCIP notification number (Romania)	fe30f22a-169c-4850-af30-bcb1b4f8cd0a
SCIP notification number (Sweden)	ea67cc89-9a63-4991-beb8-12dfd1fe9d6f

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03084

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 289-713

↓

Documentation			
Bid Text		Instruction Leaflet	
289-713	19.02.2019	xml 3.59 KB	↓
289-713	09.02.2015	doc 27.00 KB	↓
		Operation and Assembly Instructions Interface	V 1.0.0 02.04.2025
		pdf 1246.19 KB	↓

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 289-713	EPLAN Data Portal 289-713
↓	↓
	WSCAD Universe 289-713
	↓
	ZUKEN Portal 289-713
	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 709-196
Marking strips; for laser printer; translucent



Item No.: 709-177
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



Item No.: 709-178
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

1.1.2 Tool

1.1.2.1 Operating tool




Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination




Conductor termination – screwdriver actuation parallel to conductor entry




Conductor termination – screwdriver actuation perpendicular to conductor entry

Installation



Snapping a module onto DIN-rail.



Removing a module from the DIN-rail.