
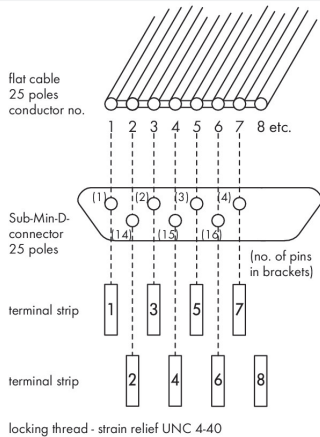



Data Sheet | Item Number: 289-544

Interface module; with solder pin; Male connector; 50-pole; for mating connectors with IDC; Vertical mounting; PCB terminal blocks, triple-row; in mounting carrier; 2,50 mm²

<https://www.wago.com/289-544>

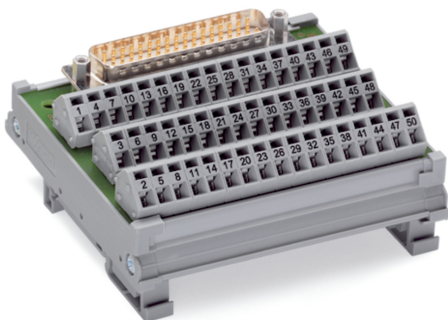

Notes	
Safety Information	Notice! Accessible live parts! Protection against accidental contact must be provided by the system installer, e.g., using a WAGO 709 Series Cover (see "Accessories") or a similar cover. The installation guidelines must be followed for each specific application.

Electrical data	
Operating voltage	≤ 125 VAC/VDC
Nominal current	2 A
Contact resistance (max.)	30 mΩ



Safety and protection	
Rated Voltage	125 V
Pollution degree	2
Protection type	IP00
Dielectric strength (channel/channel) (AC, 1 min.)	0.75 kVrms
Insulation type	Functional insulation

Connection Data			
Performance level	2 / 200 mating cycles	Connection 1	
Strain relief	UNC 4-40 stud bolt	Pluggable connector	D-subminiature male connector
		Pole number 1	50
		Connection type	System
		Note (conductor cross-section)	12 AWG: THHN, THWN
		Mating direction	vertical

Connection 2	
Design	PCB terminal blocks (triple-row)
Pole number	50
Connection type	Field
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 236 Series
Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches

Physical data	
Width	94 mm / 3.701 inches
Height	85 mm / 3.346 inches
Depth from upper-edge of DIN-rail	34 mm / 1.339 inches

Mechanical data	
Mounting type	DIN-35 rail
Housing design	Mounting carrier

Material data	
Contact material (connector)	Au over Ni
Fire load	1.036 MJ
Weight	126.8 g

Environmental requirements	
Ambient temperature (operation)	-20 ... +50 °C
Ambient temperature (storage)	-40 ... +70 °C
Relative humidity	≤ 85 % (non-condensing)



Standards and Specifications											
Standards/specifications		EN 61010-2-201									
Commercial data											
Product Group		6 (INTERFACE ELECTRONIC)									
PU (SPU)		3 (1) pcs									
Packaging type		Box									
Country of origin		DE									
GTIN		4045454452216									
Customs tariff number		85369010000									
Product Classification											
UNSPSC		39121421									
eCl@ss 10.0		27-14-11-52									
eCl@ss 9.0		27-14-11-52									
ETIM 9.0		EC002780									
ETIM 10.0		EC002780									
ECCN		NO US CLASSIFICATION									
Environmental Product Compliance											
RoHS Compliance Status		Compliant,With Exemption									
RoHS Exemption		6(c)									
SCIP notification number (Austria)		8bebd6e9-0e05-4fdf-811c-c5dba1336061									
SCIP notification number (Belgium)		1d5364e5-40a2-42f1-9a8c-0a701b7351f2									
SCIP notification number (Bulgaria)		9862e7f8-588b-4846-b592-95fda5f5358b									
SCIP notification number (Czech Republic)		5e3085b6-bbc1-4eb0-8b33-6042c5593337									
SCIP notification number (Denmark)		657cde4d-0221-47e6-b60f-949a5a95c85d									
SCIP notification number (Finland)		5b7ecd8d-9faf-45a2-ad55-a0516bdbc4f5									
SCIP notification number (France)		390fd549-2e39-4b57-a047-e1dd392ff083									
SCIP notification number (Germany)		ba33c737-df4e-4840-a3ea-7137eef4b5a9									
SCIP notification number (Hungary)		c873c66a-91f6-4e54-ace1-fcb04fd21cb2									
SCIP notification number (Italy)		962eb620-d19a-4cb7-a302-229d921905a0									
SCIP notification number (Netherlands)		d5a3c85f-2626-403c-aa04-35017d70a01d									
SCIP notification number (Poland)		55f60432-5532-4bf8-a386-9ff01ec9cbb3									
SCIP notification number (Romania)		62c70e42-5127-4358-8741-e26fe3aa7535									
SCIP notification number (Sweden)		dac45454-af16-4194-940a-05dec65e861f									
Approvals / Certificates											
General approvals		Declarations of conformity and manufacturer's declarations									
											
Approval	Standard	Certificate Name									
cURus Underwriters Laboratories Inc.	UL 508	E175199 Vol.2 Sec.1									
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03084									
		<table><tr><th>Approval</th><th>Standard</th><th>Certificate Name</th></tr><tr><td>EU-Declaration of Confor- mity WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr><tr><td>UK-Declaration of Confor- mity WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr></table>	Approval	Standard	Certificate Name	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
Approval	Standard	Certificate Name									
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-									
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-									

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 289-544

↓

Documentation				
Bid Text			Instruction Leaflet	
289-544	06.02.2015	doc 26.00 KB	Operation and Assembly Instructions Interface	V 1.0.0 02.04.2025 pdf 1246.19 KB
		↓		↓

CAD/CAE-Data

CAE data

EPLAN Data Portal 289-544

↓

WSCAD Universe 289-544

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 709-196
Marking strips; for laser printer; translucent



Item No.: 709-177
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



Item No.: 709-178
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

1.1.2 Tool


1.1.2.1 Operating tool




Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination




Conductor termination – screwdriver actuation parallel to conductor entry




Conductor termination – screwdriver actuation perpendicular to conductor entry

Installation



Snapping a module onto DIN-rail.



Removing a module from the DIN-rail.