


Ascent 100 II Arch 120

ASCENT 100 II ARCH 1200 4K DALI 120
2060527



Product features

- The ASCENT 100 II ARCH 1200 4K DALI 120 is a high efficient DALI dimmable downlight luminaire, Colour rendering index Ra >80, Colour temperature: 4000K Neutral White, Class II, Protection rating IP40/IP20, Cut out dimensions: 137mm

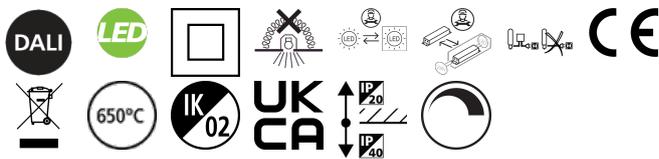


PRODUCT OVERVIEW

Product name	ASCENT 100 II ARCH 1200 4K DALI 120
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4260843
Warranty	5 years
Useful luminous flux (Fuse)	1228
Fixture luminous flux (lm)	1228
Luminaire efficacy (lm/W)	123
LOR (%)	100
Correlated colour temperature (k)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Beam Angle (°)	85
Glare control	< 23
Photobiological Risk Group	RG0
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	Yes
Dimming method	DALI, Switch-dim (mains-rated), DALI-2
Minimum dimming level (%)	1
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK02
Product EAN number	5025768605279

Ascent 100 II Arch 120 ASCENT 100 II ARCH 1200 4K DALI 120 2060527

PHOTOMETRY

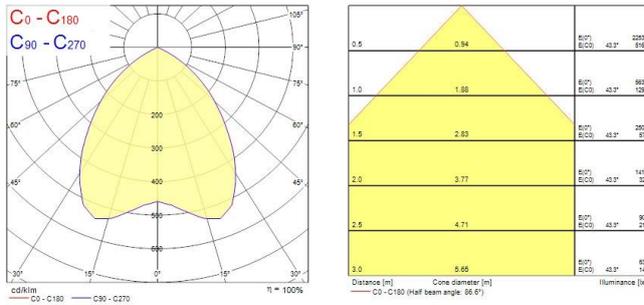

TECHNICAL DRAWINGS

