
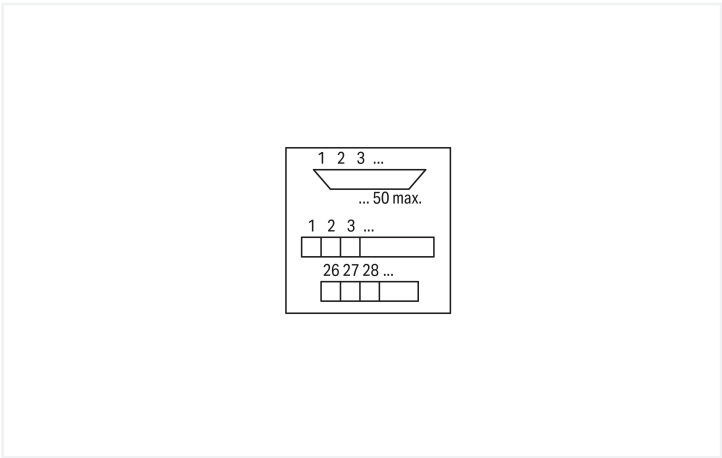


Data Sheet | Item Number: 289-445

Interface module; with solder pin; Male connector; 9-pole; Mating connector with solder connection; Vertical mounting; PCB terminal blocks, double-row; with mounting feet; 2,50 mm²

<https://www.wago.com/289-445>

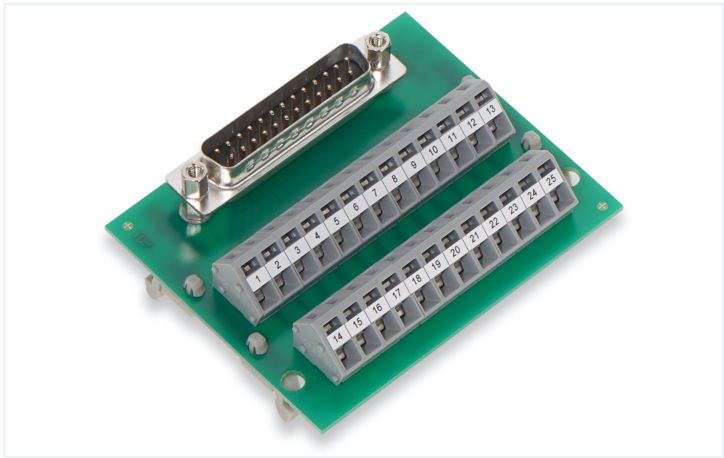

Similar to illustration

Notes	
Safety Information	Notice! Accessible live parts! Protection against accidental contact must be provided by the system installer, e.g., using a WAGO 709 Series Cover (see "Accessories") or a similar cover. The installation guidelines must be followed for each specific application.

Electrical data	
Operating voltage	≤ 30 VAC; ≤ 50 VDC
Nominal current	1 A
Contact resistance (max.)	30 mΩ

Safety and protection	
Rated Voltage	50 V
Rated impulse withstand voltage	0.8 kV
Pollution degree	2
Protection type	IP00
Insulation type	Basic insulation

Connection Data			
Performance level	2 / 200 mating cycles	Connection 1	
Strain relief	UNC 4-40 stud bolt	Pluggable connector	D-subminiature male connector
		Pole number 1	9
		Connection type	System
		Note (conductor cross-section)	12 AWG: THHN, THWN
		Mating direction	vertical



Connection 2	
Design	PCB terminal blocks (double-row)
Pole number	9
Connection type	Field
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 236 Series
Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches

Physical data	
Width	38 mm / 1.496 inches
Height	63.5 mm / 2.5 inches
Depth from upper-edge of DIN-rail	19 mm / 0.748 inches

Mechanical data	
Mounting type	DIN-35 rail
Housing design	PCB with mounting feet

Material data	
Contact material (connector)	Au over Ni
Fire load	0.056 MJ
Weight	24.7 g

Environmental requirements	
Ambient temperature (operation)	-20 ... +50 °C
Ambient temperature (storage)	-40 ... +70 °C
Relative humidity	≤ 85 % (non-condensing)

Standards and Specifications	
Standards/specifications	EN 61010-2-201

Commercial data	
Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	25 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454367107
Customs tariff number	85366990990



Product Classification	
UNSPSC	39121421
eCl@ss 10.0	27-14-11-52
eCl@ss 9.0	27-14-11-52
ETIM 9.0	EC002780
ETIM 10.0	EC002780
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	f6f34124-5997-4bb6-88cb-79a4ea0d10c1
SCIP notification number (Belgium)	dc3fac1c-474a-433e-9cd1-9f7975dfe386
SCIP notification number (Bulgaria)	8425726f-12d2-41d2-9a80-1cc6b1e5f065
SCIP notification number (Czech Republic)	340c1a7e-0ebb-4888-b6f5-bf608ed6087d
SCIP notification number (Denmark)	c49092f0-5d30-4da8-9899-aa4a424a7211
SCIP notification number (Finland)	008676ad-47b0-422c-adb2-3577ac7e7a96
SCIP notification number (France)	235af48a-fad9-4e4b-aaeb-70f2e2e6e263
SCIP notification number (Germany)	242f2721-9f4e-42c8-8906-3342d83893dd
SCIP notification number (Hungary)	611c15b2-4a1a-437f-86e4-00ba7f72c599
SCIP notification number (Italy)	9574028a-336b-4d6d-a799-9bda0cef6376
SCIP notification number (Netherlands)	f1ab783c-f94a-4563-8e8f-6cb329511767
SCIP notification number (Poland)	018b6a92-3b87-4572-8e3b-75ba6f269d35
SCIP notification number (Romania)	c7b81add-4814-496d-9a18-5a9c6295321f
SCIP notification number (Sweden)	f4611b51-97c4-428b-a913-efd74126e58c

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 289-445

↓

Documentation			
Bid Text		Instruction Leaflet	
289-445	06.02.2015	doc	26.00 KB
		Operation and Assembly Instructions Interface	V 1.0.0 02.04.2025
		pdf	1246.19 KB

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 289-445	EPLAN Data Portal 289-445
	WSCAD Universe 289-445
	ZUKEN Portal 289-445

1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Cover



Item No.: 709-153
Cover; Type 1; suitable for cover carrier, type 1; 1 m long; transparent

1.1.1.2 Cover carrier



Item No.: 709-167
Cover carrier; Type 1; incl. fixing/retaining screws and knurled nut; suitable for 279 to 282 and 880 Series rail-mounted terminal blocks; suitable for 264 Series miniature rail-mounted terminal blocks; suitable for 270 Series sensor and actuator terminal blocks; gray

1.1.2 Tool


1.1.2.1 Operating tool




Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination



Conductor termination – screwdriver ac-
tuation parallel to conductor entry



Conductor termination – screwdriver ac-
tuation perpendicular to conductor entry