


RANA LED Surface 1200
RANA LED S 1200 LO 4K LOUV+PRI EM W GEN2
0051484

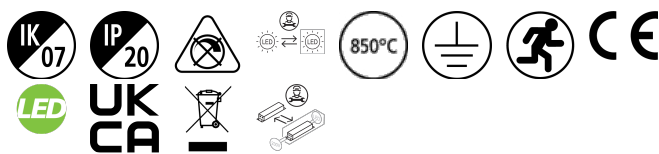

PRODUCT OVERVIEW

Product name	RANA LED S 1200 LO 4K LOUV+PRI EM W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Warranty	5 years
Fixture luminous flux (lm)	3100
Luminaire efficacy (lm/W)	97
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	280
Total power consumption (W)	32
Electrical protection	Class I
Control gear type	Electronic ballast
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP20
IK rating	IK07
Product EAN number	5410288514840

DATA TABLE

General data	
Product name	RANA LED S 1200 LO 4K LOUV+PRI EM W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended

RANA LED Surface 1200

RANA LED S 1200 LO 4K LOUV+PRI EM W GEN2

0051484

Operating temperature range (°C)	5°C...+25°C
Performance ambient temperature Tq (°C)	25
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3100
Luminaire efficacy (lm/W)	97
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 19
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	280
Emergency duration (h)	3

Electrical data

Total power consumption (W)	32
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.95
Electrical protection	Class I
Control gear type	Electronic ballast
Drive current (mA)	275
Inrush Current (A)	22
Inrush Duration (µs)	250
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	28
Max. products per 20A B Breaker	34
Connectable conductor cross section - Min (mm²)	2.5
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B50	50000
Lifespan L70 B10	50000
Lifespan L80 B50	50000
Lifespan L80 B10	50000
Lifespan L90 B50	50000
Lifespan L90 B10	50000

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK07

RANA LED Surface 1200

RANA LED S 1200 LO 4K LOUV+PRIM W GEN2
0051484

Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1160
Nominal Product Width (mm)	187
Weight (kg)	4.1





Packaging

Single packaging type	Carton
Product EAN number	5410288514840
Packaging single width (cm)	6.5
Packaging single depth (cm)	21.0
DUN14 (outer)	05410288514840
Packaging outer length / height (cm)	153.5

Safety data

Optimal operating condition (°C)	5-25
----------------------------------	------

PHOTOMETRY

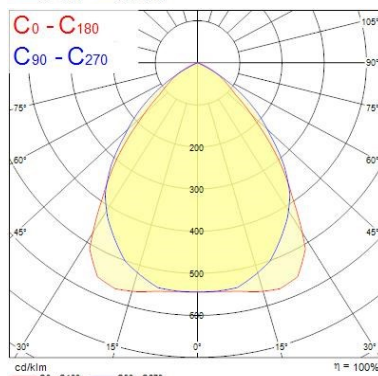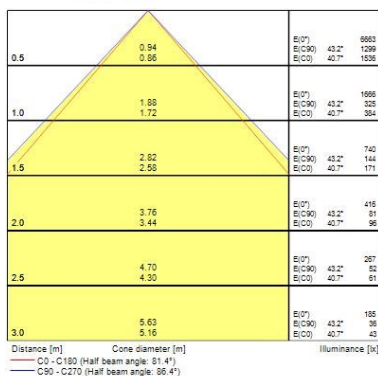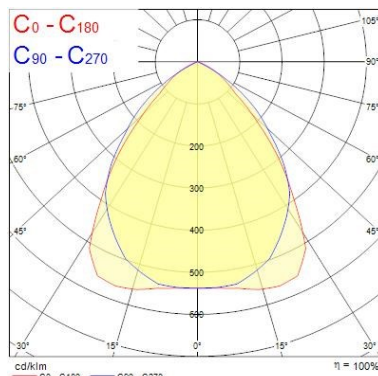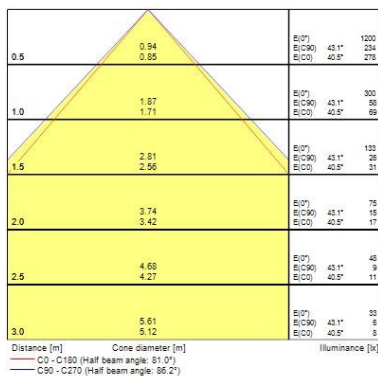

TECHNICAL DRAWINGS

RANA LED Surface 1200

RANA LED S 1200 LO 4K LOUV+PRI EM W GEN2

0051484

