



Features

• OPTIX SURFACE 1500 MPO D 4000K DALI EM is a high efficacy low glare surface or suspended LED Linear luminaire with Micro Prismatic diffuser, with direct light distribution, luminaire dimensions: 1500x200x50mm, Sylvania White body colour (RAL9016), IP20, IK07, DALI dimmable, 3hr maintained emergency version, low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 4350lm luminous flux, 38W power consumption, 114lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<20, Luminance at 65° < 3000 cd/m2, lumen maintenance: L90B50 at 71000h, photobiological safety risk group 1. Electrical protection Class I.


Product Overview

Product name	OPTIX SURFACE 1500 MPO D 4000K DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	4350
Luminaire efficacy (lm/W)	114
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 20
Photobiological Risk Group	RG1


OPTIX SURFACE 1500 MPO D 4000K DALI EM 2021705

Luminous flux (emergency) (lm)	80
Total power consumption (W)	38
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5025768217052
Warranty	5 years
Dimming method	DALI

Photometry

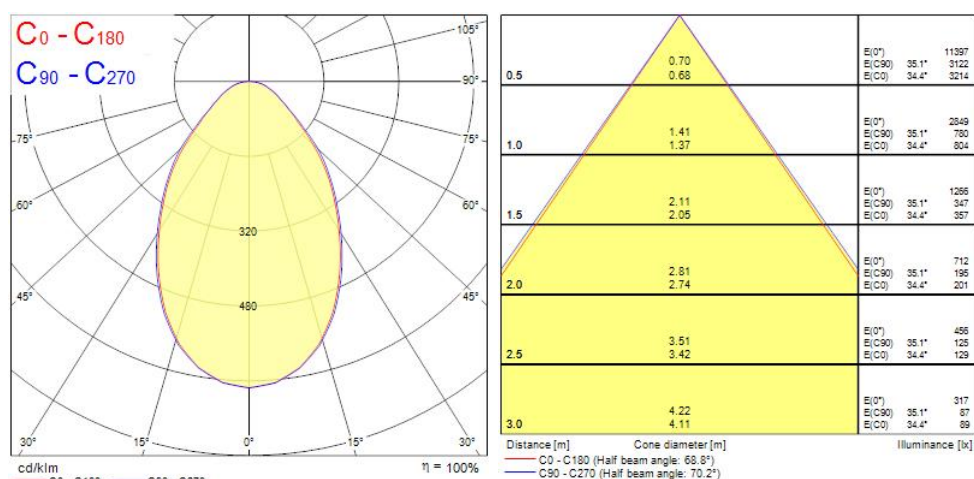

Technical drawings

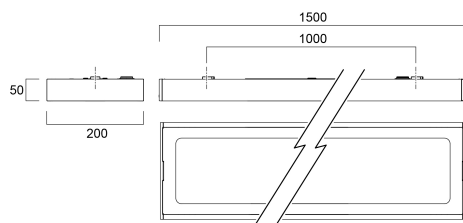

Data table

GENERAL DATA

Product name	OPTIX SURFACE 1500 MPO D 4000K DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
General application	Education, Office
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	4350
Luminaire efficacy (lm/W)	114
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Distribution type	Symmetric
Glare control	< 20
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	80
Emergency duration (h)	3

ELECTRICAL DATA

Total power consumption (W)	38
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1

OPTIX SURFACE 1500 MPO D 4000K DALI EM 2021705

THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	9
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Drive current (mA)	300
Inrush Current (A)	23.1
Inrush Duration (µs)	174
Energy Efficiency Class (A->G) of contained light source	C, C(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	18
Max. products per 13A C Breaker	26
Max. products per 16A C Breaker	28
Max. products per 20A C Breaker	34
Max. products per 10A B Breaker	9
Max. products per 13A B Breaker	13
Max. products per 16A B Breaker	14
Max. products per 20A B Breaker	17
Connectable conductor cross section - Max (mm²)	1.5

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	71000

PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Prismatic

OPTIX SURFACE 1500 MPO D 4000K DALI EM 2021705

Diffuser material	PMMA Acrylic
Nominal Product Length (mm)	1500
Nominal Product Width (mm)	200
Nominal Product Height (mm)	50
Weight (kg)	5.7

PACKAGING

Product EAN number	5025768217052
Packaging single length / height (cm)	155.0
Packaging single width (cm)	9.0
Packaging single depth (cm)	21.0
DUN14 (inner)	05025768217052
Units per outer package	1
Packaging outer length / height (cm)	155.0
Packaging outer width (cm)	9.0
Packaging outer depth (cm)	21.0

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	10-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No