


## 2PK-2005: Backplate elbow female 20x3/4"

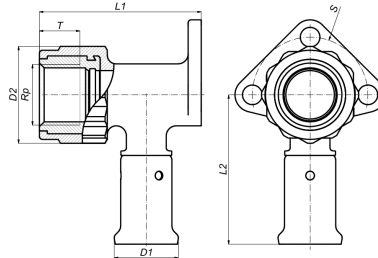

### Commercial information

PVDF press fittings in combination with multilayer pipe, a completely corrosion-free system. The synthetic press fittings are made from injection moulded PVDF (Polyvinylidene fluoride)\*. PVDF offers the user a unique combination of properties:

- Highly resistant to pressure and temperature
- Excellent mechanical strength
- Extreme flexibility: bending up to 10° is possible
- Perfectly suited for drinking water and food
- Highly resistant to chemicals and corrosion
- Embedding is possible without extra protection

### Certificates

ATG, QB (CSTBat), DVGW Wasser, ETA, KIWA, ÖVGW Wasser, SINTEF, WRAS, KOMO, STF, ÖN EN 21003-2/-3, GOST-R, ITC, TSU, AFNOR, PZH, ACS, DNV-GL, Aenor, Sans 21003, Kontrol Biro, RISE, EMI

### Applications

Potable water, Heating, Compressed air, Cooling, Sanitary






### Solutions

Building installations, Industry, Utility, Shipbuilding

## Technical characteristics

Housing material	Polyvinylidene fluoride (PVDF)	Outer pipe diameter connection	20 Millimetre
Material quality	Other	Length of connection 1	58 Millimetre
Surface protection	Untreated	Working length connection 1	25 Millimetre
Shape	Right-angled	Length of connection 2	42 Millimetre
System specific	✓	Working length connection 2	26.5 Millimetre
Nominal diameter connection 2	3/4 inch (20)	Length from wall plate	56 Millimetre
Connection	Press sleeve	Length of connection 3	0 Millimetre
Thread size tap connection	3/4 inch	Working length connection 3	0 Millimetre
Contour code	TH	Medium temperature (continuous)	-10 70 Degrees celsius
DVGW quality mark for gas	✗	Max. operating pressure at 20 °C	16 Bar
DVGW quality mark for water	✓	Zeta value	1.264
Compliant with NF 545	✗		
KIWA certified	✓		
Gastec QA mark	✗		
KOMO certified	✓		
Type approval according to BBR/EKS	✗		

## Related products

Product code	GTIN	Description	Image
PRESCHECK1432	05414764029521	Henco Tool to control the accuracy of a pressing Ø14-32	
BE20	05414764029521	Henco Jaws (universal) BE/TH-Profile 20x2	
PLUG05-R80	05414764029521	Henco Plug 3/4" 80mm Red	
PLUG05-B80	05414764029521	Henco Plug 3/4" 80mm Blue	
PLP-P-PK	05414764029521	Henco Galvanised bracket for backplate elbow	
PLF-P-PK	05414764029521	Henco Galvanised bracket flat for backplate elbow	