

## Features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 13W; 1700lm; 131lm/W; 4000K; UGR <19 with shallow product depth 60mm. Meets TP(a) requirements.

## Product Overview

Product name	Insaver Slim UGR19 IP44 175 1700lm 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
E-number FI	4278514
Fixture luminous flux (lm)	1700
Luminaire efficacy (lm/W)	131
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	13
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9010 - Pure white
IP rating	IP44/20

Insaver Slim UGR19 IP44 175 1700lm 840  
**0030503**

**IK rating**

IK07


**Product EAN number**

5410288305035

**Warranty**

5 years

## Photometry

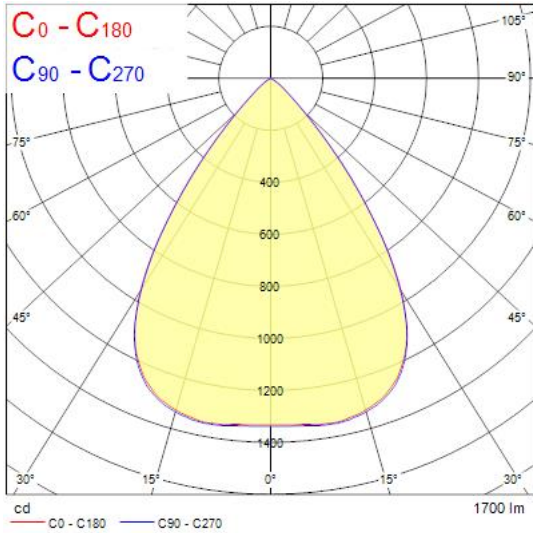

## Technical drawings

