
















28 018 979 Product version from 4/1/2024




- spray head Ø 100mm
- Three or five settings: COMPACT RAIN, COMPACT SOFT FLOW, COMPACT AQUAPRESSURE FLOW, max. flow rate 15 l/min (at 3 bar)
- Function from: 6.8 l/min
- 1/2" connection
- inherently safe from back flow
- with anti-scale system

Notes:


	Chrome	28 018 979-00
	Brushed Platinum	28 018 979-06
	Platinum	28 018 979-08
	Dark Chrome	28 018 979-19
	Light Gold (PVD)	28 018 979-26
	Brushed Light Gold (PVD)	28 018 979-27
	Brushed Durabrass (23kt Gold)	28 018 979-28
	Matte Black	28 018 979-33
	Brushed Gold (PVD)	28 018 979-37
	Brushed Dark Brass (PVD)	28 018 979-39
	Brushed Bronze (PVD)	28 018 979-42
	Brushed Dark Bronze (PVD)	28 018 979-43
	Brushed Champagne (22kt Gold)	28 018 979-46
	Champagne (22kt Gold)	28 018 979-47
	Brushed Chrome	28 018 979-93
	Brushed Dark Platinum	28 018 979-99

28 018 979 Product version from 4/1/2024

mm [inches]

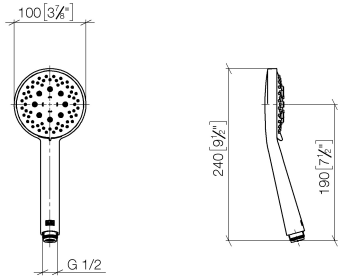

Flow rate chart

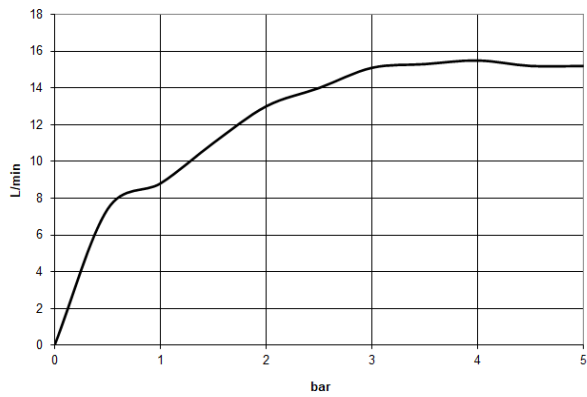

Codes & Standards

DIN 4109

EN 1112

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Hand shower 100 mm - Chrome

SERIES-VARIOUS


28 018 979 Product version from 4/1/2024

Certificates and sustainability

DVGW_DW-
6517DN0

LGA_29

WRAS_2210



Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
2	09 23 01 039 90	Sieve seal Ø 19 x 5,5 mm -	1.00	14
1	09 23 01 046 90	Back-flow preventer 15 l/min. -	1.00	14