


Concord

COLOSSAL 400mm HO 840 OPAL DIR WHITE DALI EM 2071332

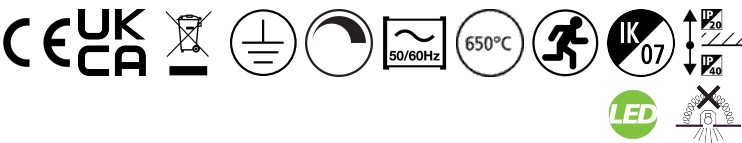

Features

• 400mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with polycarbonate opal diffuser. Direct light distribution, 3435lm luminous flux, 27.3W system power, 126lm/W luminaire efficacy. DALI dimmable. 3 hours integrated emergency. Colour rendering index Ra >80, 4000K Neutral White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40, IK03. 600mA drive current. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.

Product Overview


Product name	COLOSSAL 400mm HO 840 OPAL DIR WHITE DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
General application	Hospitality, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	3435
Luminaire efficacy (lm/W)	123
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 24
Photobiological Risk Group	RG0
Total power consumption (W)	27.9
Electrical protection	Class I

Concord

COLOSSAL 400mm HO 840 OPAL DIR WHITE DALI EM 2071332

Control gear type	LED driver constant current
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK07
Product EAN number	5025768713325
Warranty	5 years
Dimming method	DALI-2
Colour Code	840

Photometry

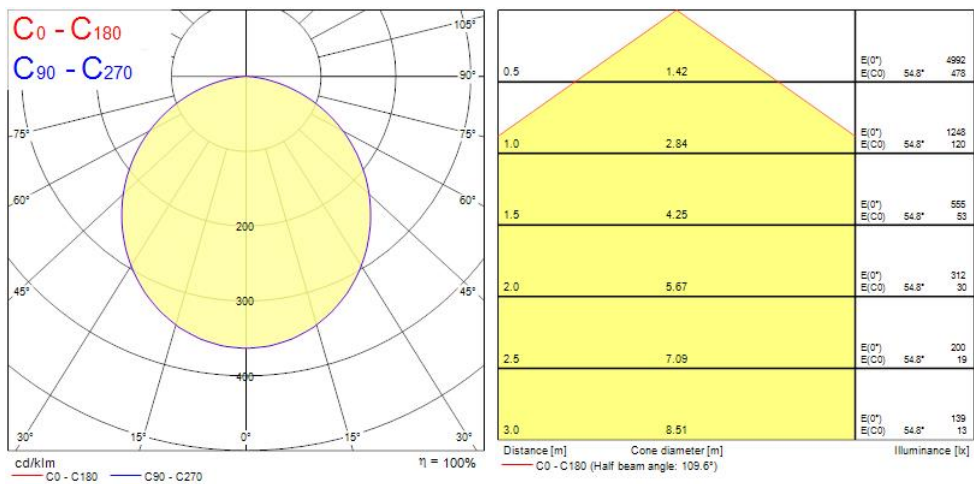

Technical drawings



Data table

GENERAL DATA

Product name	COLOSSAL 400mm HO 840 OPAL DIR WHITE DALI EM
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
General application	Hospitality, Office
Operating temperature range (°C)	10°C...+25°C
ETIM Class	EC002892
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	3435
Luminaire efficacy (lm/W)	123
Correlated colour temperature (k)	4000
Colour Code	840

COLOSSAL 400mm HO 840 OPAL DIR WHITE DALI EM 2071332

Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Distribution type	Symmetric
Glare control	< 24
Photobiological Risk Group	RG0
Emergency duration (h)	3

ELECTRICAL DATA

Total power consumption (W)	27.9
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Drive current (mA)	600
Inrush Current (A)	20
Inrush Duration (μ s)	200
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	31
Max. products per 13A C Breaker	39
Max. products per 16A C Breaker	51
Max. products per 20A C Breaker	62
Max. products per 10A B Breaker	18
Max. products per 16A B Breaker	30
Max. products per 20A B Breaker	37

COLOSSAL 400mm HO 840 OPAL DIR WHITE DALI EM 2071332

Connectable conductor cross section - Min (mm²)	1.5
Connectable conductor cross section - Max (mm²)	2.5

LIFETIME DATA

Lifespan L70 B50	170000
Lifespan L80 B20	145000
Lifespan L90 B10	66000

PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP40/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	93
Nominal Product Diameter (mm)	400
Weight (kg)	6.8

PACKAGING

Product EAN number	5025768713325
Packaging single length / height (cm)	14.0
Packaging single width (cm)	47.0
Packaging single depth (cm)	47.0
DUN14 (inner)	05025768713325
Units per outer package	1
Packaging outer length / height (cm)	14.0
Packaging outer width (cm)	47.0
Packaging outer depth (cm)	47.0

SAFETY DATA

Glow Wire Test (°C)	650
---------------------	-----

Concord

COLOSSAL 400mm HO 840 OPAL DIR WHITE DALI EM
2071332

Optimal operating condition (°C)	10-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No