




Color: ■ gray

Similar to illustration

Electrical data			
Ratings per IEC/EN		Power Loss	
Operation status indicator	48 V	Power loss, per pole (potential)	1.3112 W
		Rated current I _N for specified power loss	41 A
		Resistance value for specified, current-dependent power loss	0.00078 Ω
Connection data			
Connection points	4	Connection 1	
Total number of potentials	2	Connection technology	CAGE CLAMP®
Number of levels	1	Actuation type	Operating tool
		Connectable conductor materials	Copper
		Solid conductor	0.2 ... 6 mm² / 24 ... 10 AWG
		Fine-stranded conductor	0.2 ... 6 mm² / 24 ... 10 AWG
		Strip length	12 ... 13 mm / 0.47 ... 0.51 inches
		Wiring direction	Side-entry wiring
Physical data			
Width	16 mm / 0.63 inches		
Height	87.5 mm / 3.445 inches		
Depth from upper-edge of DIN-rail	38.5 mm / 1.516 inches		

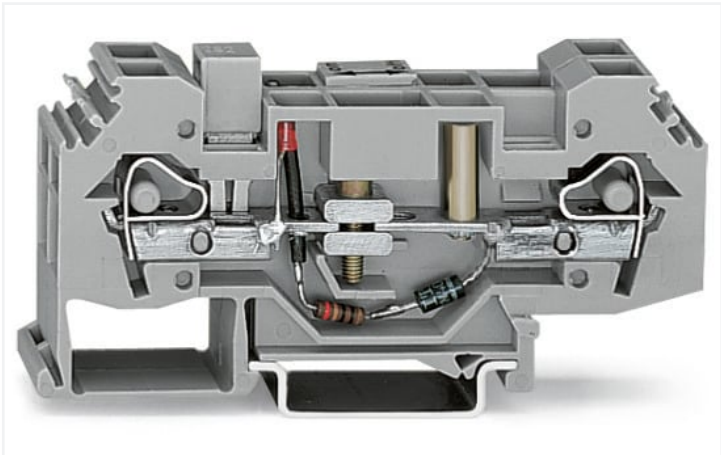

Mechanical data	
Design	horizontal type
Mounting type	DIN-35 rail
Marking level	Side marking

Material data	
Note (material data)	Information on material specifications can be found here
Color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.745 MJ
Weight	45.3 g

Environmental requirements	
Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

Commercial data	
Product Group	1 (Rail Mounted Terminal Blocks)
eCl@ss 10.0	27-14-11-26
eCl@ss 9.0	27-14-11-26
ETIM 8.0	EC000902
ETIM 7.0	EC000902
PU (SPU)	12 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454448523
Customs tariff number	85365080900

Environmental Product Compliance	
CAS-No.	7439-92-1 79-94-7
REACH Candidate List Substance	2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I
SCIP notification number (Austria)	a3a018b0-a404-47ab-b5fc-fdb3f1a392c2
SCIP notification number (Belgium)	939648d2-0c32-49cb-9ff1-5db350e7c3cb
SCIP notification number (Bulgaria)	c9c7d68d-38db-418a-87d3-04dcc5398bfa
SCIP notification number (Czech Republic)	04a9be1b-4461-4f25-8889-1a6a9ab93e8a
SCIP notification number (Denmark)	3cff43e6-2095-49b3-b4dc-536ab8aca692
SCIP notification number (Finland)	4f2af339-f4a9-456b-a0b8-2e43aec59935
SCIP notification number (France)	d07fa2bb-9e01-4f85-9b59-3da7c3fcc5ab
SCIP notification number (Germany)	64d12446-8184-46cc-bc87-40d531496935
SCIP notification number (Hungary)	db11e906-cf78-414c-84fa-1cbfbe20d008
SCIP notification number (Italy)	6a37dd9e-3d2d-491f-ace4-d865507c27f9
SCIP notification number (Netherlands)	be4023a1-dc73-42d5-bf1c-189028a95acf
SCIP notification number (Poland)	19c11706-714b-4986-ae80-07db3441e982
SCIP notification number (Romania)	006771f9-f8f5-4c76-b81f-b8c02ab5810c
SCIP notification number (Sweden)	9f2dd056-e4b8-4b8b-861f-53c4aac70b89



Approvals / Certificates														
General approvals														
CCA KEMA EUR <table><tr><th>Approval</th><th>Standard</th><th>Certificate Name</th></tr><tr><td>CCA DEKRA Certification B.V.</td><td>EN 60947</td><td>NTR NL 7894</td></tr><tr><td>KEMA/KEUR DEKRA Certification B.V.</td><td>EN 60947</td><td>71-120778</td></tr></table>			Approval	Standard	Certificate Name	CCA DEKRA Certification B.V.	EN 60947	NTR NL 7894	KEMA/KEUR DEKRA Certification B.V.	EN 60947	71-120778			
Approval	Standard	Certificate Name												
CCA DEKRA Certification B.V.	EN 60947	NTR NL 7894												
KEMA/KEUR DEKRA Certification B.V.	EN 60947	71-120778												
Approvals for marine applications														
ABS AMERICAN BUREAU OF SHIP- PING BUREAU VERITAS DNV DNV GL <table><tr><th>Approval</th><th>Standard</th><th>Certificate Name</th></tr><tr><td>ABS American Bureau of Ship- ping</td><td>EN 60947</td><td>20-HG1941090-PDA</td></tr><tr><td>BV Bureau Veritas S.A.</td><td>EN 60947</td><td>07436/F0 BV</td></tr><tr><td>DNV GL Det Norske Veritas, Ger- manischer Lloyd</td><td>-</td><td>TAE00001V2</td></tr></table>			Approval	Standard	Certificate Name	ABS American Bureau of Ship- ping	EN 60947	20-HG1941090-PDA	BV Bureau Veritas S.A.	EN 60947	07436/F0 BV	DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001V2
Approval	Standard	Certificate Name												
ABS American Bureau of Ship- ping	EN 60947	20-HG1941090-PDA												
BV Bureau Veritas S.A.	EN 60947	07436/F0 BV												
DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001V2												
Downloads														
Environmental Product Compliance														
Compliance Search														
Environmental Product Compliance 282-141		↓												
Documentation														
Additional Information		Bid Text												
Technical Section	pdf 2240.62 KB	↓												
		<table><tr><td>282-141</td><td>19.02.2019</td><td>xml 2.95 KB</td><td>↓</td></tr><tr><td>282-141</td><td>12.06.2017</td><td>doc 24.00 KB</td><td>↓</td></tr></table>	282-141	19.02.2019	xml 2.95 KB	↓	282-141	12.06.2017	doc 24.00 KB	↓				
282-141	19.02.2019	xml 2.95 KB	↓											
282-141	12.06.2017	doc 24.00 KB	↓											
CAD/CAE-Data														
CAD data		CAE data												
2D/3D Models 282-141		<table><tr><td>EPLAN Data Portal 282-141</td><td>↓</td></tr><tr><td>WSCAD Universe 282-141</td><td>↓</td></tr><tr><td>ZUKEN Portal 282-141</td><td>↓</td></tr></table>	EPLAN Data Portal 282-141	↓	WSCAD Universe 282-141	↓	ZUKEN Portal 282-141	↓						
EPLAN Data Portal 282-141	↓													
WSCAD Universe 282-141	↓													
ZUKEN Portal 282-141	↓													



1 Compatible Products

1.1 Required Accessories

1.1.1 End plate

1.1.1.1 End plate



Item No.: 282-314
End and intermediate plate; 4 mm thick; gray



Item No.: 282-315
End and intermediate plate; 4 mm thick; orange

1.2 Optional Accessories

1.2.1 Coding

1.2.1.1 Locking system



Item No.: 282-137
Lock-out; prevents reclosing of slide link; snap-in type; orange

1.2.2 DIN-rail

1.2.2.1 Mounting accessories



Item No.: 210-196
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslopped; similar to EN 60715; silver-colored



Item No.: 210-198
Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslopped; according to EN 60715; copper-colored



Item No.: 210-508
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored



Item No.: 210-197
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored



Item No.: 210-506
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslopped; galvanized; similar to EN 60715; silver-colored



Item No.: 210-114
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslopped; similar to EN 60715; silver-colored



Item No.: 210-118
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslopped; according to EN 60715; silver-colored



Item No.: 210-115
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored



Item No.: 210-112
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored



Item No.: 210-504
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored



Item No.: 210-113
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslopped; according to EN 60715; silver-colored



Item No.: 210-505
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslopped; galvanized; according to EN 60715; silver-colored

1.2.3 Ferrule

1.2.3.1 Ferrule



Item No.: 216-262
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



Item No.: 216-263
Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



Item No.: 216-264
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



Item No.: 216-266
Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



1.2.3.1 Ferrule



Item No.: 216-267
Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

1.2.4 Installation

1.2.4.1 Cover



Item No.: 709-153
Cover; Type 1; suitable for cover carrier, type 1; 1 m long; transparent

1.2.4.2 Cover carrier



Item No.: 709-167
Cover carrier; Type 1; incl. fixing/retaining screws and knurled nut; suitable for 279 to 282 and 880 Series rail-mounted terminal blocks; suitable for 264 Series miniature rail-mounted terminal blocks; suitable for 270 Series sensor and actuator terminal blocks; gray

1.2.4.3 Mounting accessories



Item No.: 209-106
Mounting carrier; for isolated mounting on DIN 35 rails; gray



Item No.: 249-116
Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

1.2.5 Jumper

1.2.5.1 Jumper



Item No.: 282-402
Jumper; insulated; gray



Item No.: 282-424
Jumper; insulated; orange



Item No.: 282-422
Jumper; insulated; yellow-green



Item No.: 709-110
Wire commoning chain; 2.5 mm²; insulated; black



Item No.: 709-111
Wire commoning chain; 2.5 mm²; insulated; black



Item No.: 709-112
Wire commoning chain; 2.5 mm²; insulated; black



1.2.6 Marking

1.2.6.1 Group marker carrier



[Item No.: 209-143](#)
Group marker carrier; gray

[Item No.: 209-144](#)
Group marker carrier; gray

[Item No.: 249-105](#)
Group marker carrier; gray

1.2.6.2 Marker



[Item No.: 793-5501/000-006](#)
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; blue

[Item No.: 793-5501/000-014](#)
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; brown

[Item No.: 793-5501/000-007](#)
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; gray

[Item No.: 793-5501/000-023](#)
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; green



[Item No.: 793-5501/000-017](#)
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; light green

[Item No.: 793-5501/000-012](#)
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; orange

[Item No.: 793-5501/000-005](#)
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; red

[Item No.: 793-5501/000-024](#)
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; violet



[Item No.: 793-5501](#)
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

[Item No.: 793-5501/000-002](#)
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

[Item No.: 793-501/000-006](#)
WMB marking card; as card; not stretchable; plain; snap-on type; blue

[Item No.: 793-501/000-007](#)
WMB marking card; as card; not stretchable; plain; snap-on type; gray



[Item No.: 793-501/000-023](#)
WMB marking card; as card; not stretchable; plain; snap-on type; green

[Item No.: 793-501/000-017](#)
WMB marking card; as card; not stretchable; plain; snap-on type; light green

[Item No.: 793-501/000-012](#)
WMB marking card; as card; not stretchable; plain; snap-on type; orange

[Item No.: 793-501/000-005](#)
WMB marking card; as card; not stretchable; plain; snap-on type; red



[Item No.: 793-501/000-024](#)
WMB marking card; as card; not stretchable; plain; snap-on type; violet

[Item No.: 793-501](#)
WMB marking card; as card; not stretchable; plain; snap-on type; white

[Item No.: 793-501/000-002](#)
WMB marking card; as card; not stretchable; plain; snap-on type; yellow

[Item No.: 2009-115/000-006](#)
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue



[Item No.: 2009-115/000-007](#)
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

[Item No.: 2009-115/000-023](#)
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

[Item No.: 2009-115/000-017](#)
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green

[Item No.: 2009-115/000-012](#)
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



[Item No.: 2009-115/000-024](#)
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

[Item No.: 2009-115](#)
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[Item No.: 2009-115/000-002](#)
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



1.2.7 Protective warning marker

1.2.7.1 Cover



Item No.: 282-405
Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

1.2.8 Tool

1.2.8.1 Operating tool



Item No.: 210-721
Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured

Installation Notes

