


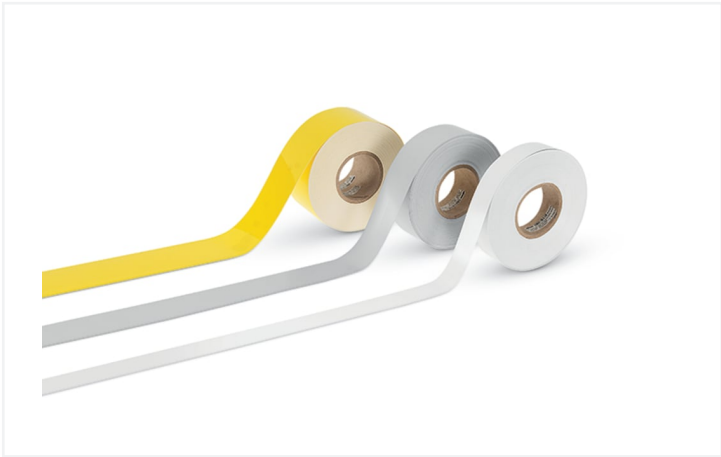

Color: ■ silver-colored Similar to illustration

Technical data

Marking method	Thermal transfer
Marking	plain
Delivery form	Roll
Delivery form configuration	20 m; 1 line
Printing device	Smart Printer (thermal transfer printer)

Physical data

Width	30 mm
Depth	0.2 mm
Strip width	30 mm

Mechanical data

Mounting type	Sticking
Smear resistance	in conjunction with 258-5005 Ink Ribbon

Material data

Color	silver-colored
Material	Polyester
UV resistance	EN 60068-2-5:2010 Procedure B
Adhesive information	Acrylic; permanent
Halogen-free	Yes
Weight	0 g
Fire load	0 MJ



Environmental requirements	
Ambient temperature (storage)	+10 ... +21 °C
Ambient temperature (operation)	-40 ... +150 °C
Relative humidity	40 ... 50 %

Commercial data	
eCl@ss 10.0	27-40-06-29
eCl@ss 9.0	27-40-06-29
ETIM 9.0	EC001288
ETIM 8.0	EC001288
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143378925
Customs tariff number	39199080888

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 210-875	

Documentation	
Operating Instructions	
2009-110 Information on printing material	128.08.2020pdf1190.09 KB

1 Compatible Products	
1.1 Optional Accessories	
1.1.1 Marking	
1.1.1.1 Marking device	



Item No.: 258-5000
Thermal transfer printer; Smart Printer; for complete control cabinet marking; 300 dpi; With marking material