

NH 800 V a.c. gG fuse links



Product description

Eaton's Busmann Series NH 800 Volts gG fuse links are designed to ensure cable protection up to 800 V a.c. They are also ideally suited for the cable protection on the AC side of solar string inverters with outputs up to 800 V a.c.

Standard features

- Compact design
- Standard IEC DIN style dimensions
- Low power loss
- Dual indicator feature
- Optional microswitches

Catalogue symbol

- (Amp rating)NHG(Fuse body size)B-800

Standards/Agency information

- IEC 60269-2

Fuse size

- DIN Style NH 00, 1 and 2

Compatible microswitches

- BVL50
- 170H0235
- 170H0236

Technical data

- Volts: 800 V a.c.
- Amps: 30 to 250 A
- Breaking capacity: 80 kA
- Class of operation: gG

Compatible fuse bases and fuse holders

(see table below)

Technical data

Size	Rated current (Amps)	Rated voltage (V a.c.)	gG dual indicator		Pre-arcing I ² t (A ² s)	Total clearing I ² t 800VAC (A ² s)	Power loss at 100% In (W)	Pack quantity
			Voltage conducting metal gripping lugs					
00	2	800	2NHG00B-800		1	35	1.2	3
00	4	800	4NHG00B-800		8	50	1.3	3
00	6	800	6NHG00B-800		26	110	1.7	3
00	10	800	10NHG00B-800		58	2000	1.5	3
00	16	800	16NHG00B-800		215	2100	2.4	3
00	20	800	20NHG00B-800		350	3150	3	3
00	35	800	35NHG00B-800		1400	6000	5	3
00	40	800	40NHG00B-800		1750	7500	5.7	3
00	50	800	50NHG00B-800		3400	14,000	6.6	3
00	63	800	63NHG00B-800		5600	22,500	8.4	3
1	32	800	32NHG1B-800		1400	12,500	3.3	3
1	40	800	40NHG1B-800		2000	18,500	4.1	3
1	50	800	50NHG1B-800		3700	32,500	5.0	3
1	63	800	63NHG1B-800		5600	49,500	6.5	3
1	80	800	80NHG1B-800		6500	36,000	9.6	3
1	100	800	100NHG1B-800		11,000	59,000	11.8	3
1	125	800	125NHG1B-800		23,500	125,000	12.4	3
1	160	800	160NHG1B-800		40,000	215,000	16.50	3
2	160	800	160NHG2B-800		53,000	340,000	15.7	3
2	200	800	200NHG2B-800		86,000	390,000	18.6	3
2	250	800	250NHG2B-800		154,000	690,000	23.5	3


Compatible fuse bases and fuse holders

Compatible fuse bases

Compatible fuse holders

Compatible NH Fuse link body size	Poles	Rated current (Amps)	Compatible fuse bases			Compatible fuse holders	
			DIN-Rail and screw mounting	Screw mounting only	DIN-Rail and screw mounting without anti-rotation terminal	Article number	Part number
00	1-pole	63	SD00-D-800	SD00-S-800	SD00-DA-800	179754	NHW-SLS-00/H
1	1-pole	160	SD1-D-800	SD1-S-800	SD1-DA-800	179756	NHW-SLS-1
2	1-pole	250	SD2-D-800	SD2-S-800	SD2-DA-800	179757	NHW-SLS-2

NH Fuse links dimensions - mm

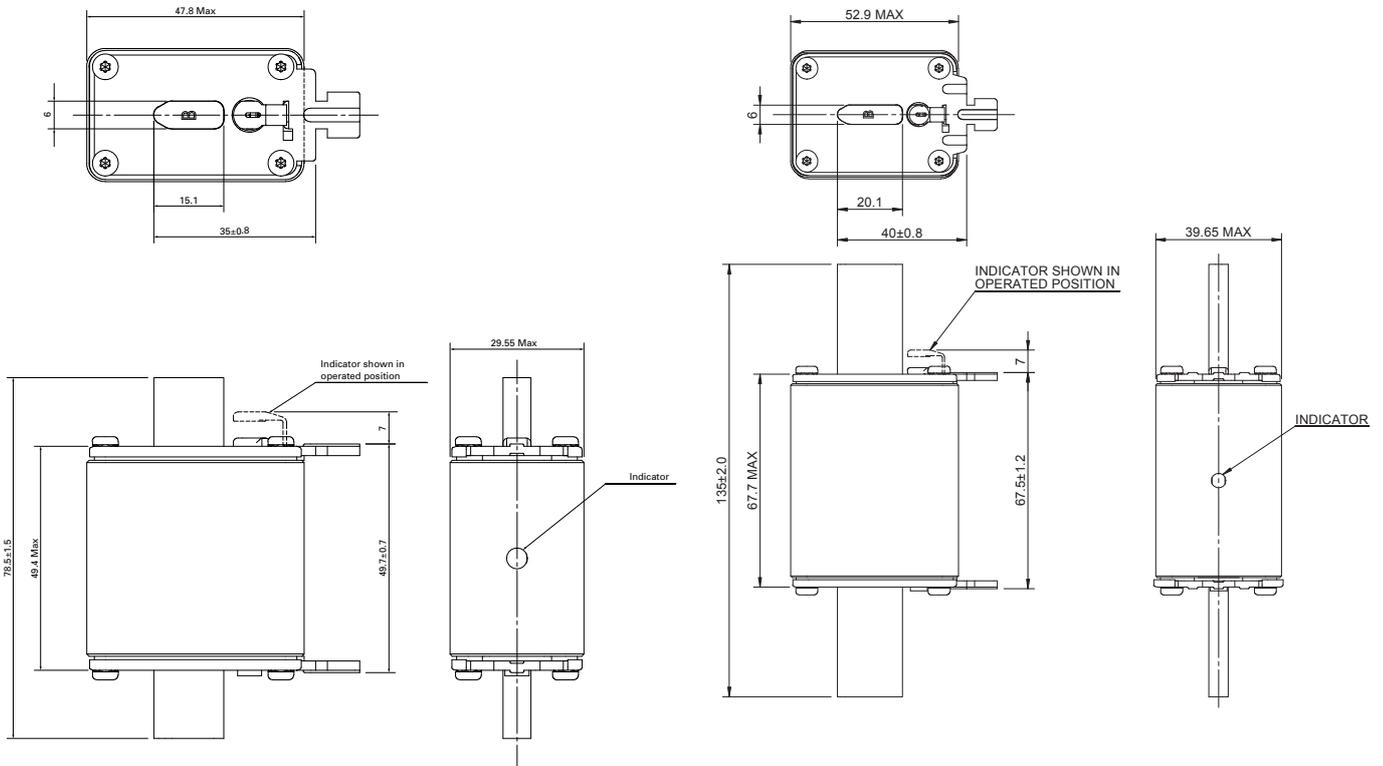


Size 00


Size 1

Size 2


Time current curve - NH00

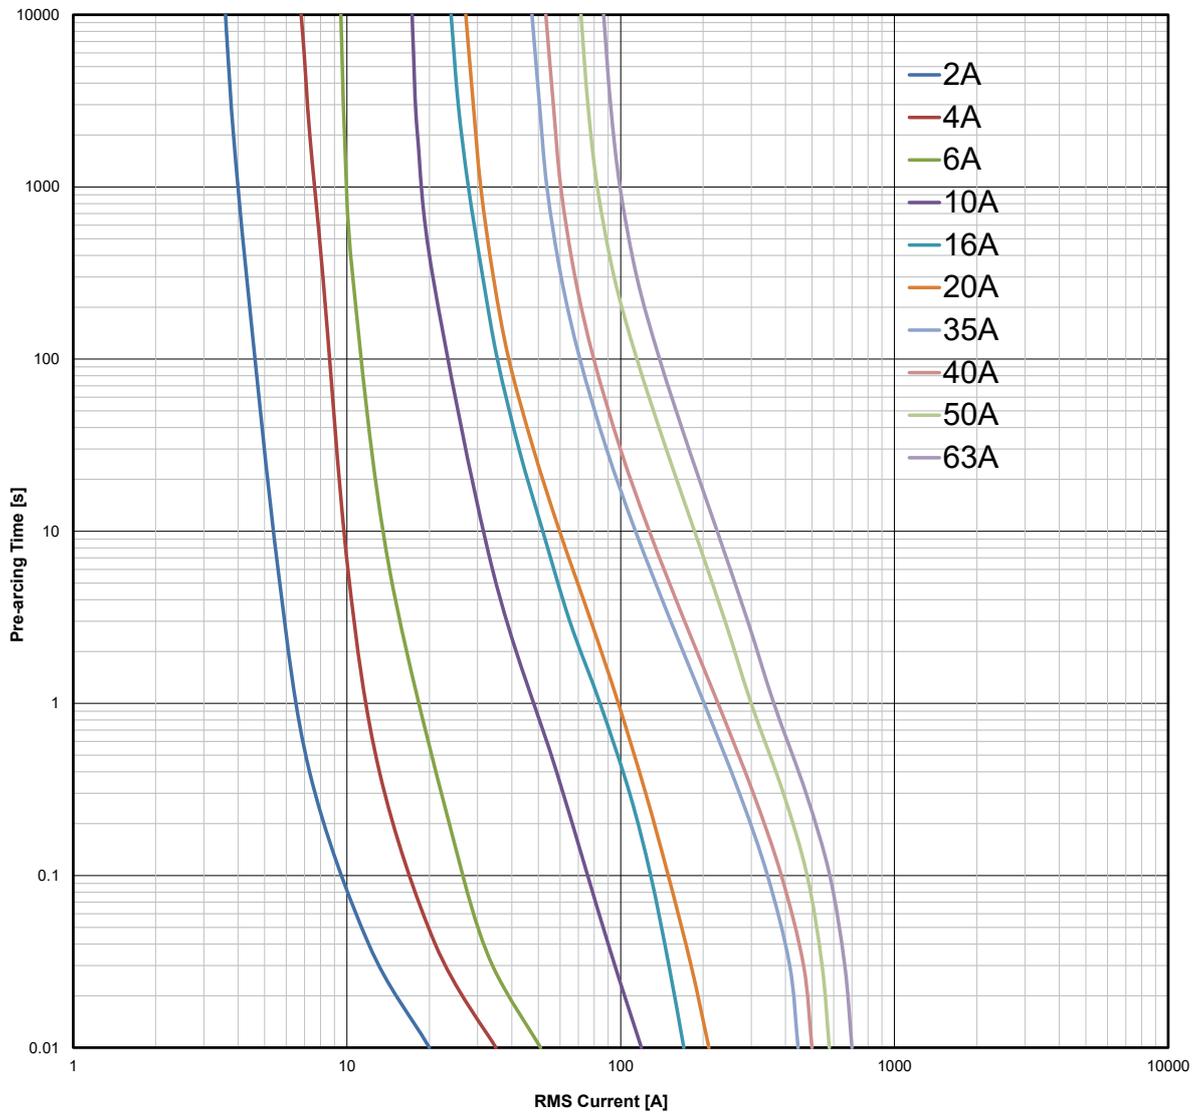


Time current curve - NH1

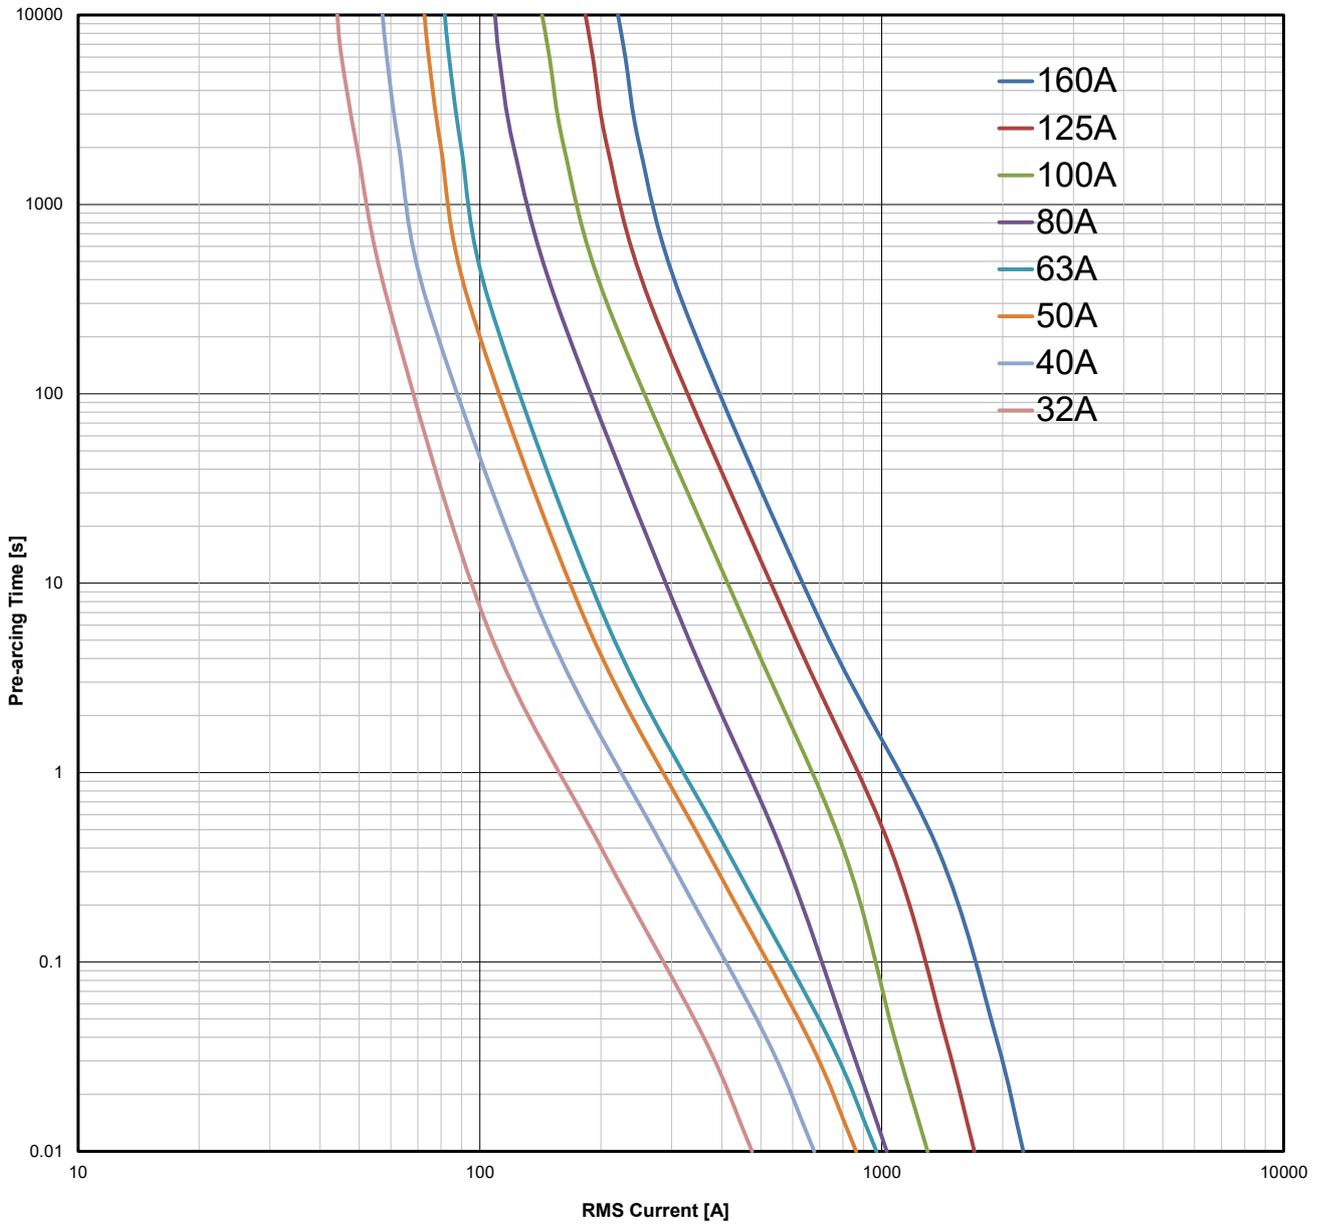


Time current curve - NH2

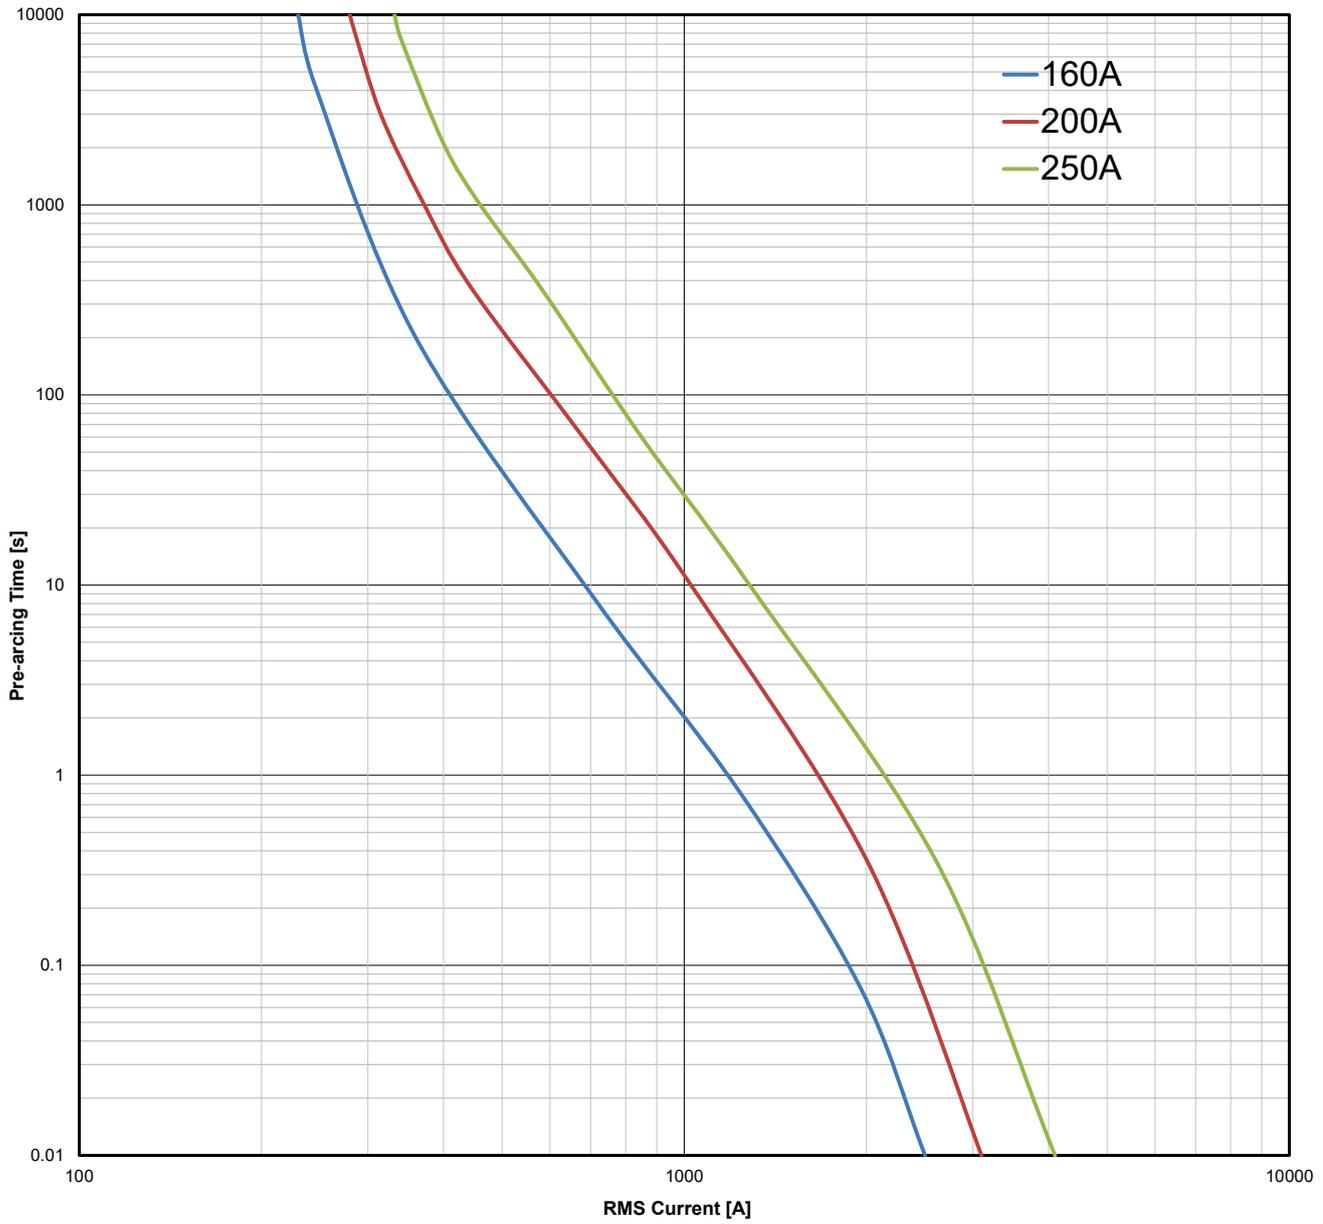


Cut-off curve - NH00

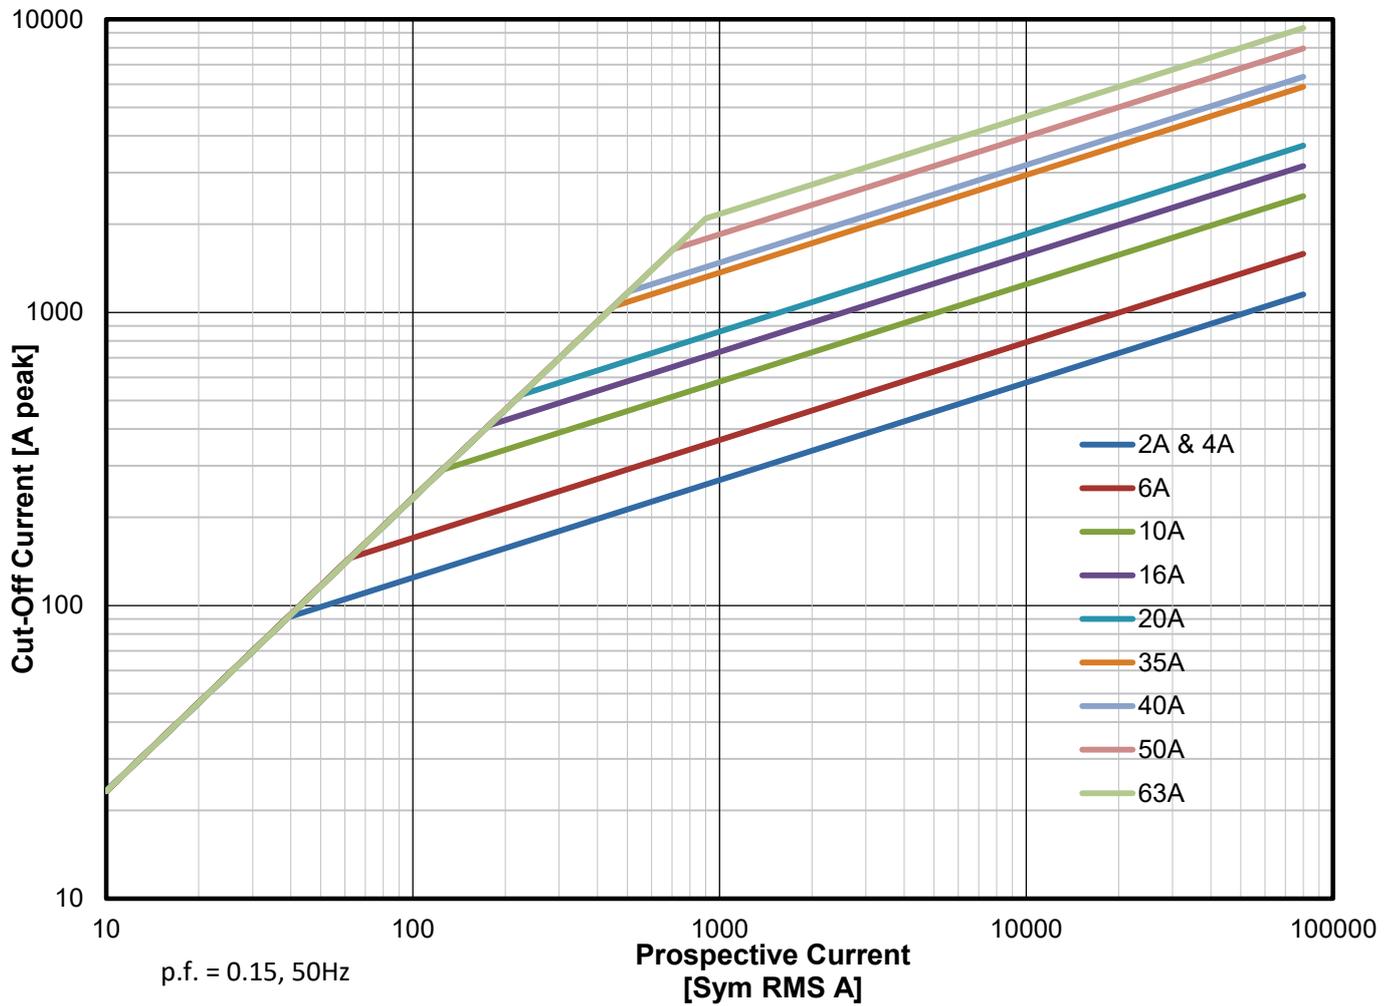

Cut-off curve - NH1

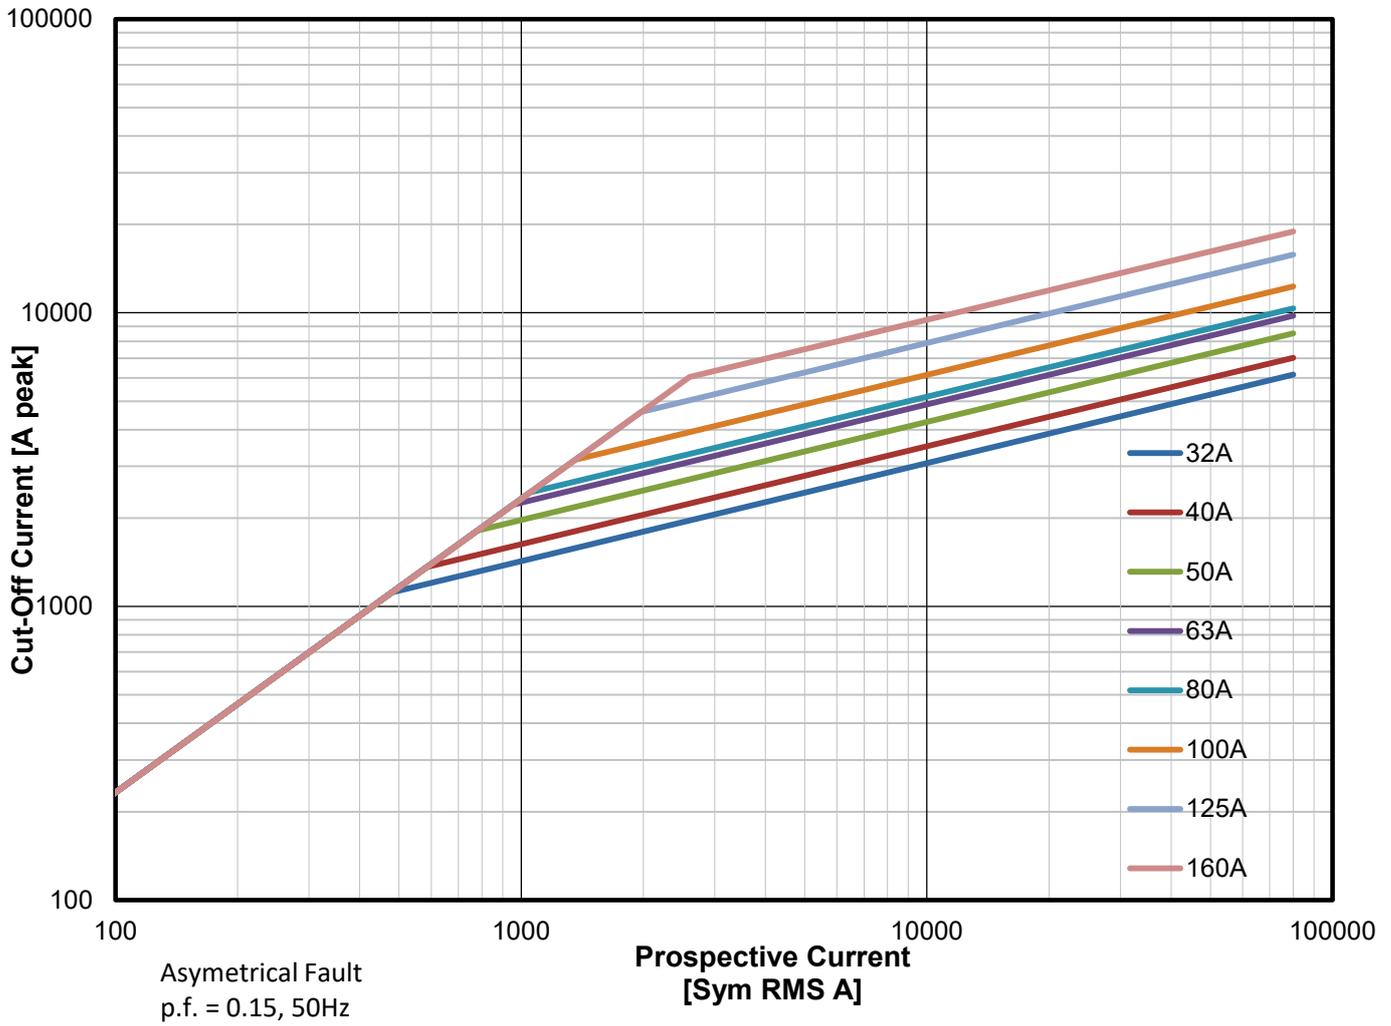

Cut-off curve - NH2

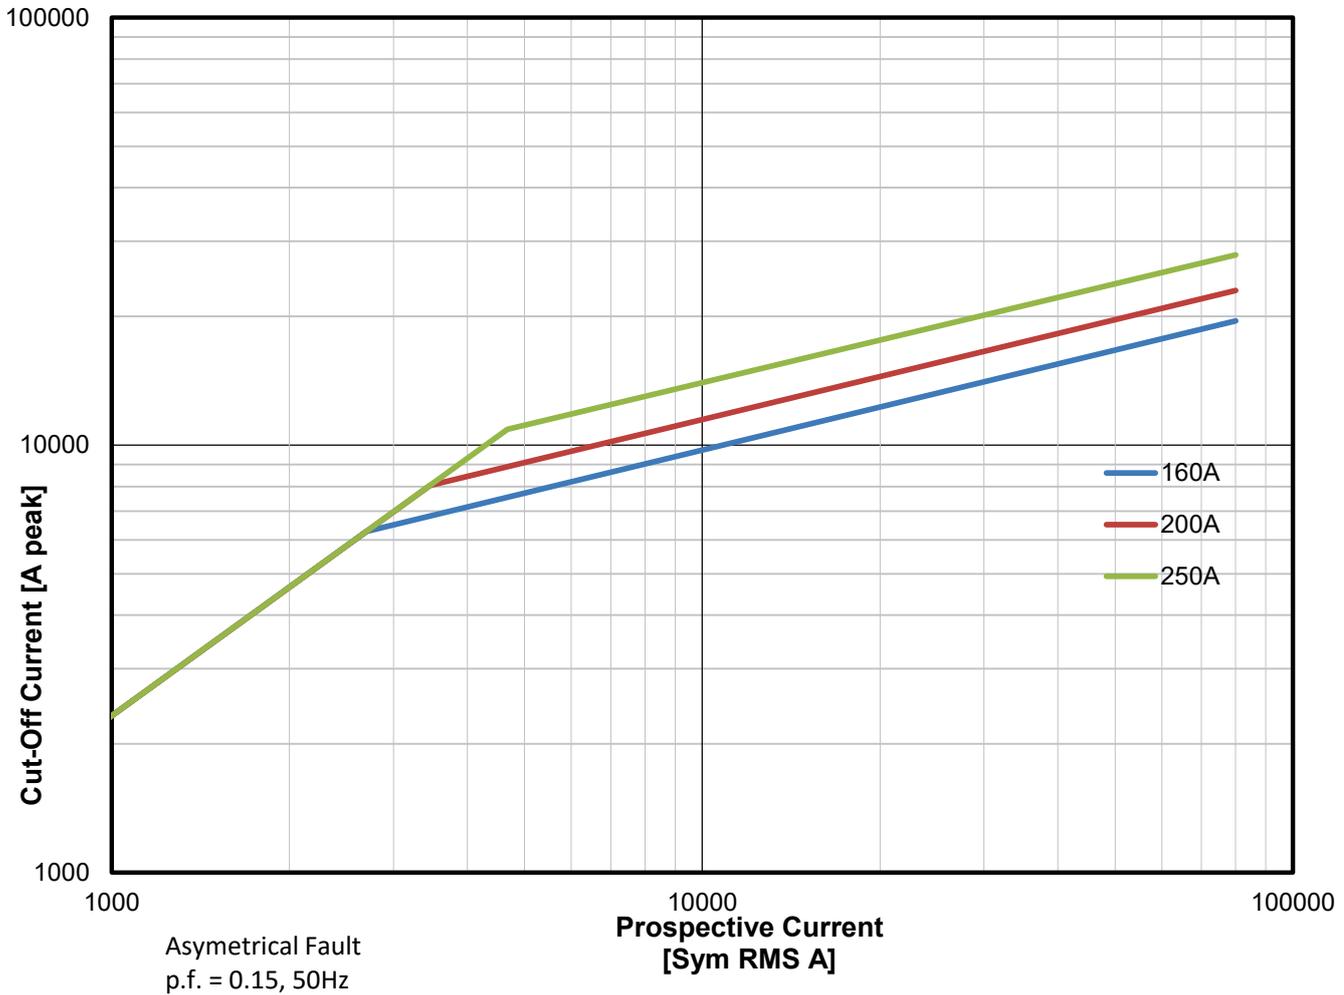

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton
EMEA Headquarters
Route de la Longeraie 7
1110 Morges, Switzerland

Eaton Electrical Products Limited
Unit 1, Hawker Business Park
Melton Road
Burton-on-the-Wolds
Leicestershire, LE12 5TH
United Kingdom

© 2025 Eaton
All Rights Reserved
PDF Only
Publication No. TD134002EN
February 2026

Eaton and Bussmann are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.