



**PHOTOMETRIC LIGHT REPORT**

**LED spot | porchlight |  
350mA | 3.3W | alu |  
2700K**

**Article number: 148-122**



Go to the  
webshop  
of Tronix  
Lighting



**TRONIX**



148-122 LED spot | porchlight | 350mA | 3.3W | alu | 2700K

## Introduction

### Purpose of this Document

This document provides accurate and objective photometric data for Tronix Lighting item 148-122. All information is based on actual measurements taken from standard production units. No modifications were made to enhance performance results. In some cases, minor adjustments—such as temporary removal of covers, cables, or mounting features—were necessary for testing purposes. These did not influence product performance.

### Test Methodology

Testing was conducted using randomly selected, unopened samples from regular inventory. All tests comply with the LM-79-19 standard, the recognized method for photometric and electrical measurements of LED and OLED luminaires. This standard, an update of IES LM-79-2008, outlines environmental test conditions, stabilization procedures, measurement methods, and approved instruments. It uses absolute photometry, meaning results directly reflect the performance of the tested product, without comparison to rated lamp standards.

### Product 148-122 was tested using:

- A photogoniometer to measure luminous intensity distribution at various angles
- An integrating sphere to determine total luminous flux and colour characteristics

### Compliance & Certification

Item 148-122 meets the requirements of the following EU directives. Tronix Lighting certifies that all relevant tests were executed in accordance with the applicable standards, and the CE mark is applied accordingly:

- General Product Safety – Directive 2023/988/EC
- Low Voltage Directive (LVD) – Directive 2014/35/EU
- Electromagnetic Compatibility (EMC) – Directive 2004/108/EC
- Ecodesign – Directive 2009/125/EC
- RoHS 3 – Directive 2011/65/EU + Amendment 2015/863/EU

### Recycling & Sustainability

Tronix Lighting is affiliated with national recycling systems for electrical and electronic waste. The luminaire is over 90% recyclable when disposed of as electronic waste at end of life. In addition, Tronix Lighting participates in national packaging recycling schemes, ensuring full compliance with both the WEEE and packaging directives.



148-122 LED spot | porchlight | 350mA | 3.3W | alu | 2700K

### Laboratory and equipment

Laboratory owner and location	Tronix Lighting BV. Uden. The Netherlands
Gonio spectrometer system and type	Viso Systems Type C. horizontal
Spectrometer manufacturer and model	(Gonio) Ocean Optics STS VIS (Sphere) Admesy HERA VIS 380–780nm
Flicker meter manufacturer and model	Viso Systems LabFlicker
Oscilloscope manufacturer and model	Tektronix MDO3024 oscilloscope (4 Channels. 200 MHz)
Power meter manufacturer and model	Vitretek PA900 Precision Multi-Channel Harmonic Power Analyzer
Power source manufacturer and model	(DC) Keithley Source Measure Unit SMU-2420 3A DC Source Meter (AC) Chroma 61601 AC Source
Datalogger Manufacturer and Model	Omega 8-Channel Thermocouple Thermometer/Data Logger

### Measurement conditions gonio spectrometer

Number of C-planes and Resolution	2 planes – 180°
γ (gamma)-Resolution	1°
Test Distance	1.14 m
Room Temperature and Humidity	22°C +/- 10% – RH 50% +/- 20%
Input Power. Power and Displacement Factors	3.1 W – PF 1.0 – DPF 0.44
Frequency of Input Power	0 Hz
Warm-up Time and Variation	Lamp stabilized in 19 min 37 sec --4.0%

### Tested light source

Manufacturer and Order Code	Tronix Lighting – 148-122
Product Description	LED spot   porchlight   350mA   3.3W   alu   2700K Batch: F22

### Main Light Measurement Results

Output – Total Lumen (Up% / Down%)	220 lm – 0% / 100%
Efficiency	71 lm/W
Energy efficiency class	G
Peak Intensity and Beam Angle	251 cd – 56.2°
Correlated Colour Temperature	CCT = 2770 K
Colour Shift. CIE duv	Duv -0.0004
Colour Rendering Index	CRI 96.9
Colour Rendering TM30-18	R <sub>f</sub> 94.4 – R <sub>g</sub> 103.0
Television Lighting Consistency Index	TLCI = 95
Flicker	SVM n/a – PstLM n/a



148-122 LED spot | porchlight | 350mA | 3.3W | alu | 2700K

### Electrical measurement details

#### Input Power

RMS Input voltage feed. $V_{RMS}$	8.85 V
RMS Input current feed. $I_{RMS}$	0.350 A
Total input power	3.1 W
Frequency of input power	0 Hz
Power factor	1.0
Displacement power factor	0.44
Total harmonic distortion of the current	0%
Total harmonic distortion of the voltage	0%

#### Input Power Curve

Voltage - Current



#### Efficiency

Radiated power efficiency: 27.0%



Lumen efficiency: 71 lm/W



#### Current Harmonics %



#### Harmonics

3rd Harmonic	n/a
5th Harmonic	n/a
7th Harmonic	n/a
9th Harmonic	n/a
11th Harmonic	n/a

### Stabilization Details

#### Warm-up Conditions

Stable period	15 min	<b>Colour temperature change during warm-up</b>	CCT start	2791 K
Stable change max	2.0%		CCT shift	-21 K
Minimum warm-up time	15 min		CCT end	2770 K

#### Warm-up Results

Total warmup time	Lamp stabilized in 19 min 37 sec	<b>Output intensity change during warm-up</b>	Output start	229 lm
Warmup variation	-4.0%		Output change	-9 lm
			Output end	220 lm




148-122 LED spot | porchlight | 350mA | 3.3W | alu | 2700K

Colour measurement details


Total lumen output 220 lm  
 Correlated Colour Temperature 2770 K  
 Colour coordinates CIE 1931 (x;y) = (0.454;0.408)  
 Colour deviation from BBL Duv = -0.0004

TM30-18 Colour Fidelity Index  $R_f$  94.4  
 TM30-18 Colour Gamut Index  $R_g$  103.0  
 Colour Rendering Index (Ra) CRI 96.9  
 Colour Rendering Index. (red component)  $R_9 = 85.9$


Colour Quality Scale CQS = 93.5  
 Television Lighting Consistency Index TLCI = 95

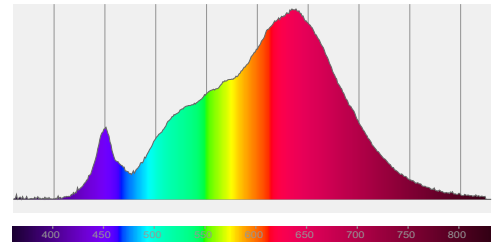

Relative spectral power distribution

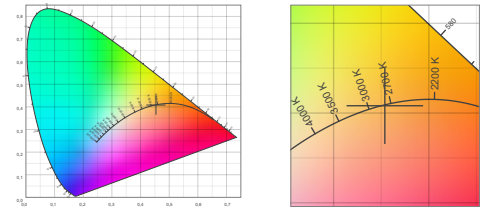

TM30 details

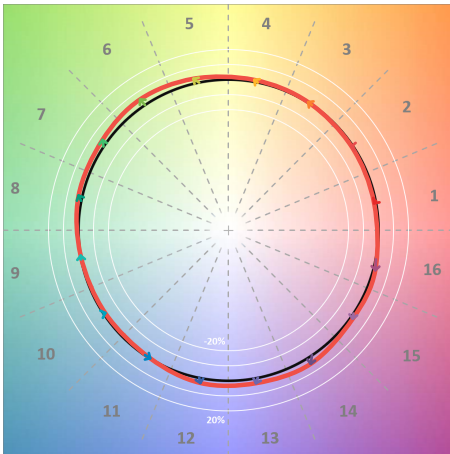


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	$R_f$	Shifts (%)	
		Chroma	Hue
C1	96	-1%	-1%
C2	97	-1%	1%
C3	94	0%	3%
C4	94	1%	3%
C5	95	3%	3%
C6	93	5%	1%
C7	93	3%	-3%
C8	94	2%	-3%
C9	96	0%	-2%
C10	97	-1%	0%
C11	94	0%	4%
C12	92	3%	1%
C13	94	3%	-2%
C14	93	4%	-4%
C15	94	2%	-3%
C16	91	1%	-7%

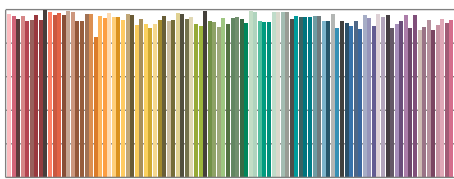

TM30-18  $R_f$ -values per reference colour

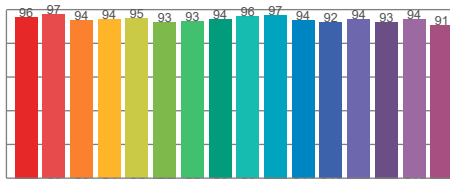


TM30-18  $R_f$ -values per hue bin

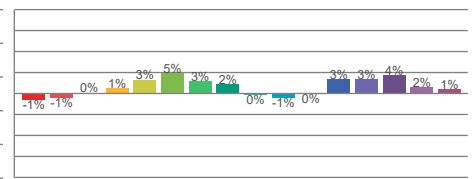


TM30 Chroma shift

Colour Quality details

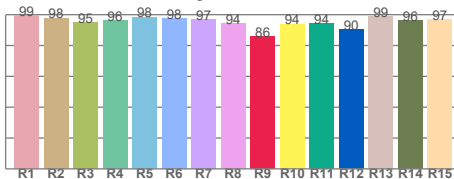

Colour Rendering Index

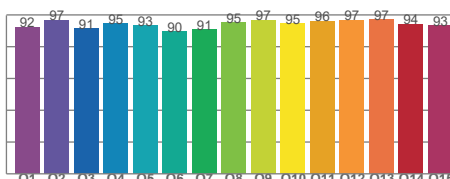

Colour Quality Scale

Document revision date: 1-7-2025 Measurement serial: VFR-250617-9755-SW



148-122 LED spot | porchlight | 350mA | 3.3W | alu | 2700K

Flicker / temporal light artefacts details

**Measurement conditions**

Flicker meter type	Viso Systems LabFlicker
Flicker/TLA sample rate	n/a samples/s
Measurement time	5x 180 seconds (15 minutes) for PstLM. 1.2 sec for all other indices

**Flicker indices according to Illuminating Engineering Society (IES)**

Flicker frequency	n/a Hz
Percent flicker	n/a %
Flicker index	n/a

**TLA indices (according IEC TR 61547-1. EN 61000-3-3 and EN 61000-4-15)**


An LED luminaire is considered flicker-free if the SVM value is  $\leq 0.4$  and if the PstLM value is  $\leq 1.0$

PstLM value ( $F < 80$ Hz)	n/a
SVM value ( $80 < F < 2000$ Hz)	n/a

**Flicker frame (one flicker period in time domain)**



**Flicker FFT (flicker curve in frequency domain)**

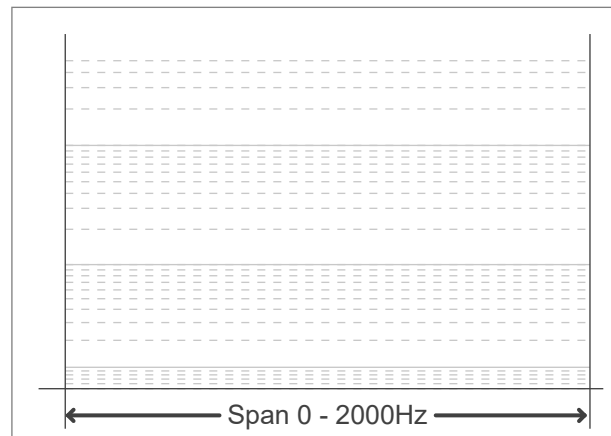

**IEEE 1789-2015 Lighting Flicker Risk Zones**



Document revision date: 1-7-2025 Measurement serial: VFR-250617-9755-SW




148-122 LED spot | porchlight | 350mA | 3.3W | alu | 2700K

Beam angle

**Luminous Intensity diagram**

Unit: 0-100% of peak intensity

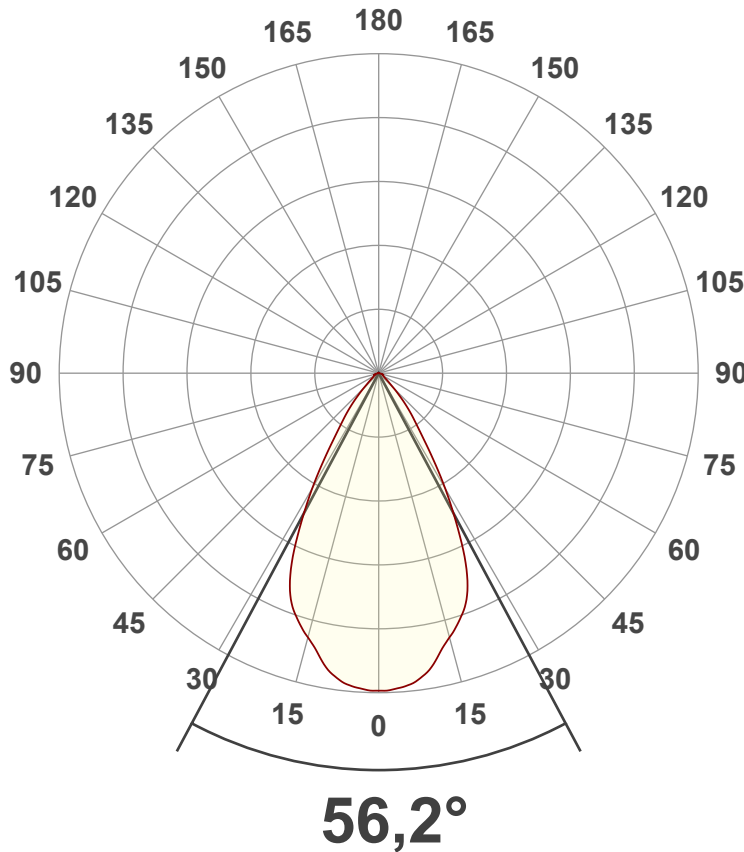

**Main Values**

Output (total Lumen)	220 lm
Lumen Up/Down	0% / 100%
Peak Intensity	251 cd
Beam Angle (50%)	56.2°
Beam Angle (90%)	56.2°
Beam Angle (10%)	56.2°

**Cut-off Angle**

Average 2.5%	106.1°
--------------	--------

**Field Angle**

Average 10%	85.1°
-------------	-------


**Intensity Ratio**

In 120° cone	97.0%
In 90° cone	92.5%

**C planes**

- C000-C180
- C090-C270

**Linear distribution diagram - Intensity (candela) vs  $\gamma$ -angle**

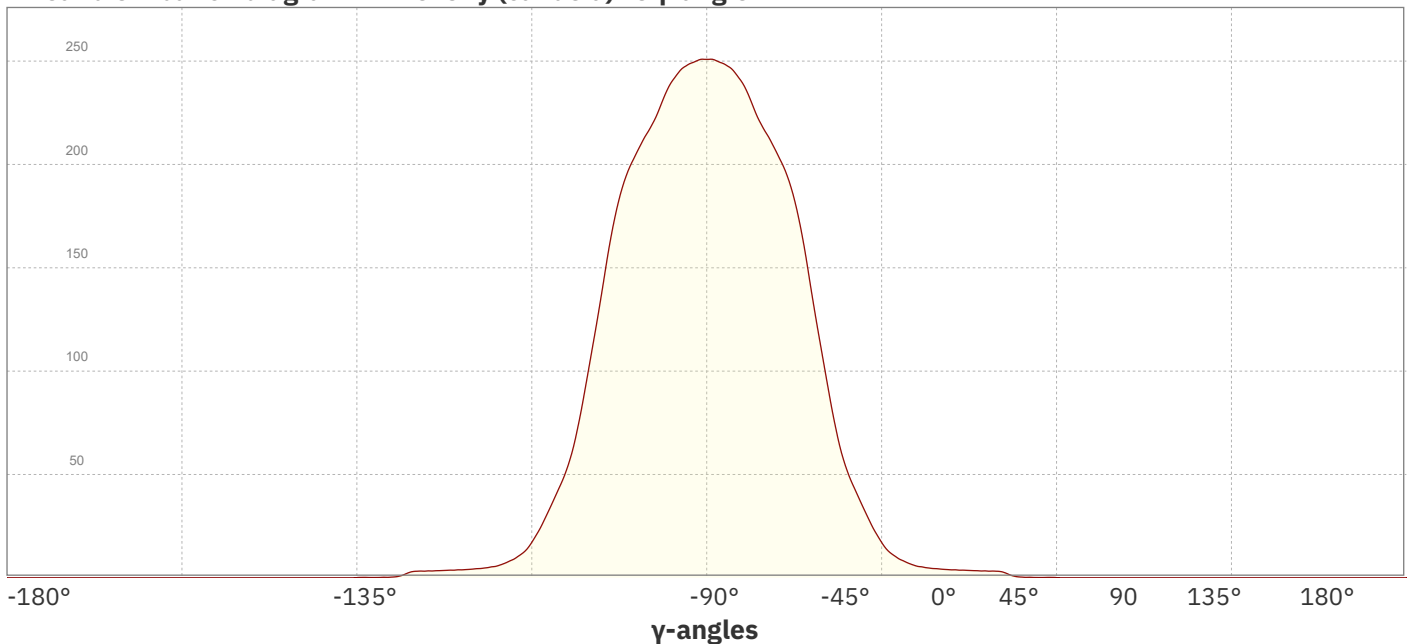


Document revision date: 1-7-2025 Measurement serial: VFR-250617-9755-SW



148-122 LED spot | porchlight | 350mA | 3.3W | alu | 2700K

Beam Details

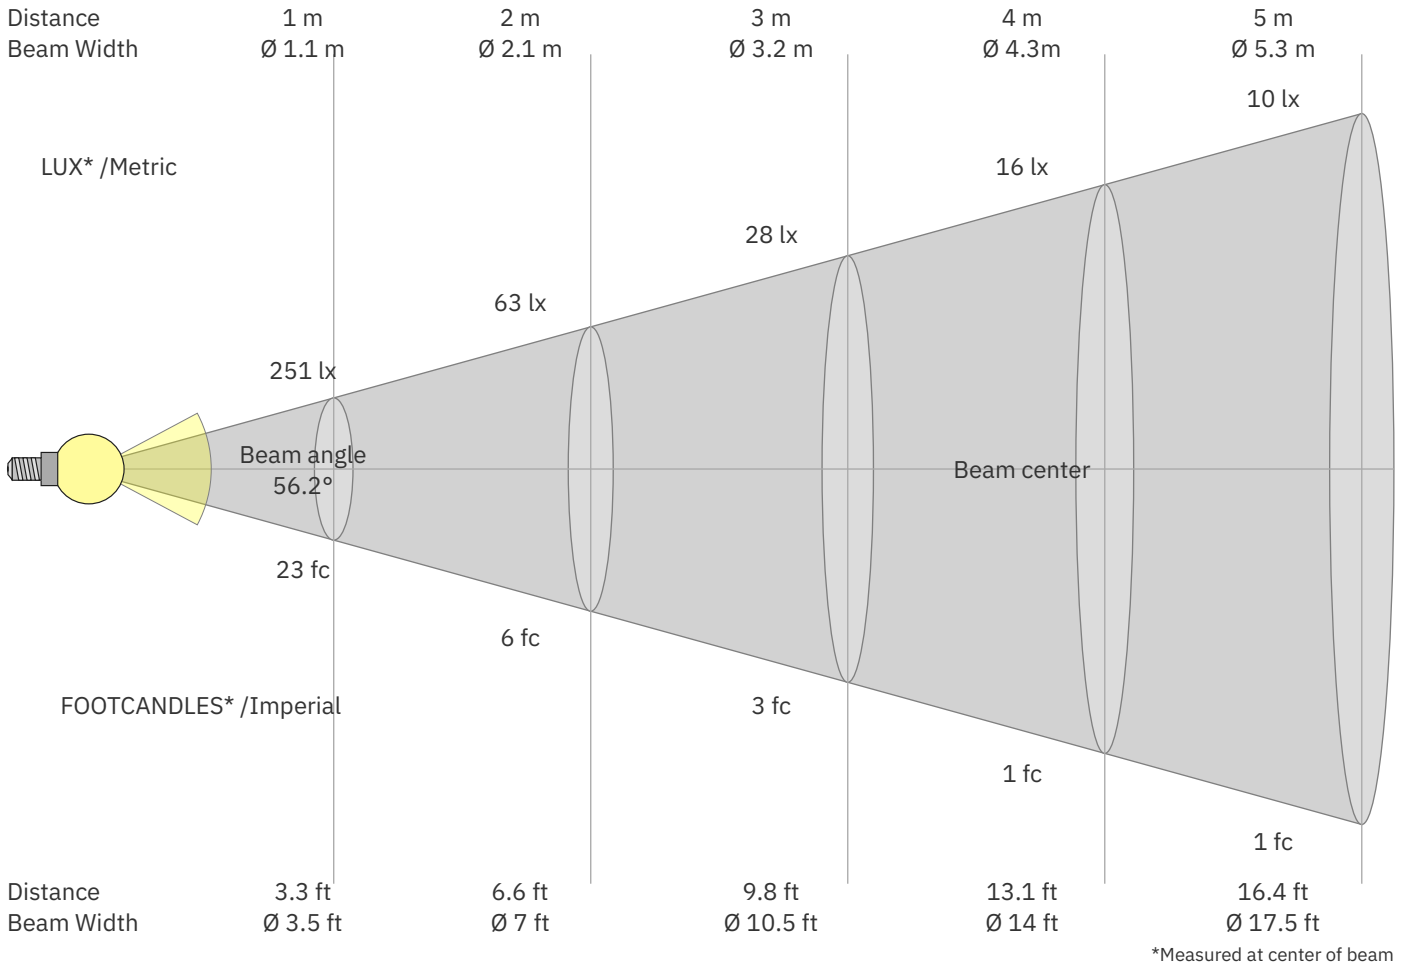

\*Measured at center of beam

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m	
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft	
251	63	28	16	10	7	5	4	3	3	2	2	1	1	1	1	1	1	1	1	1	lux
23.3	5.8	2.6	1.5	0.9	0.6	0.5	0.4	0.3	0.2	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	fc

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
251	251	249	247	243	237	228	219	213	206	198	187	171	150	127	105	84	66	53	43	cd
100%	100%	99%	98%	97%	94%	91%	87%	85%	82%	79%	74%	68%	60%	50%	42%	33%	26%	21%	17%	of 0°val

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
251	251	249	247	243	237	228	219	213	206	198	187	171	150	127	105	84	66	53	43	cd
100%	100%	99%	98%	97%	94%	91%	87%	85%	82%	79%	74%	68%	60%	50%	42%	33%	26%	21%	17%	of 0°val

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
251	251	249	247	243	237	228	219	213	206	198	187	171	150	127	105	84	66	53	43	cd
100%	100%	99%	98%	97%	94%	91%	87%	85%	82%	79%	74%	68%	60%	50%	42%	33%	26%	21%	17%	of 0°val

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	γ
251	251	249	247	243	237	228	219	213	206	198	187	171	150	127	105	84	66	53	43	cd
100%	100%	99%	98%	97%	94%	91%	87%	85%	82%	79%	74%	68%	60%	50%	42%	33%	26%	21%	17%	of 0°val

Document revision date: 1-7-2025 Measurement serial: VFR-250617-9755-SW





148-122 LED spot | porchlight | 350mA | 3.3W | alu | 2700K

Light Planning – UGR table

Uncorrected, comprehensive UGR table according to CIE 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	22.8	23.5	22.9	23.7	23.9	22.8	23.5	22.9	23.7	23.9
	3H	23.0	23.8	23.4	24.1	24.2	23.0	23.8	23.4	24.1	24.2
	4H	23.4	24.2	23.8	24.4	24.6	23.4	24.2	23.8	24.4	24.6
	6H	23.5	24.2	23.8	24.5	24.8	23.5	24.2	23.8	24.5	24.8
	8H	23.5	24.1	23.8	24.4	24.8	23.5	24.1	23.8	24.4	24.8
	12H	23.4	24.0	23.8	24.4	24.8	23.4	24.0	23.8	24.4	24.8
4H	2H	22.7	23.4	23.0	23.7	23.9	22.7	23.4	23.0	23.7	23.9
	3H	23.3	23.9	23.6	24.3	24.7	23.3	23.9	23.6	24.3	24.7
	4H	23.7	24.3	24.2	24.7	25.2	23.7	24.3	24.2	24.7	25.2
	6H	23.9	24.5	24.4	24.8	25.1	23.9	24.5	24.4	24.8	25.1
	8H	23.8	24.4	24.3	24.7	25.1	23.8	24.4	24.3	24.7	25.1
	12H	23.8	24.2	24.3	24.6	25.1	23.8	24.2	24.3	24.6	25.1
8H	4H	23.9	24.4	24.4	24.7	25.1	23.9	24.4	24.4	24.7	25.1
	6H	24.0	24.4	24.5	24.8	25.4	24.0	24.4	24.5	24.8	25.4
	8H	24.0	24.3	24.5	24.8	25.5	24.0	24.3	24.5	24.8	25.5
	12H	24.0	24.2	24.5	24.7	25.3	24.0	24.2	24.5	24.7	25.3
12H	4H	23.8	24.2	24.3	24.6	25.1	23.8	24.2	24.3	24.6	25.1
	6H	24.0	24.3	24.5	24.8	25.4	24.0	24.3	24.5	24.8	25.4
	8H	24.0	24.2	24.5	24.7	25.3	24.0	24.2	24.5	24.7	25.3

Variations with the observer position for the luminaire spacings. S:

S = 1.0H	2.8 / -2.1	2.8 / -2.1
S = 1.5H	5.0 / -2.4	5.0 / -2.4
S = 2.0H	6.7 / -2.9	6.7 / -2.9

Coefficients of Utilization

Ceiling reflectance	80	70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	0	
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0	
RCR	(RCR: Room Cavity Ratio)															
	Room Values are expressed as percentage of Lumen delivered to the task surface															
0	119	119	119	119	116	116	116	116	111	111	106	106	106	102	102	100
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89
3	102	95	90	85	100	93	89	85	91	87	83	88	85	82	86	83
4	96	88	83	78	94	87	82	78	85	80	77	83	79	76	81	78
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	72	68
7	82	73	67	62	81	72	66	62	71	66	62	70	65	62	69	64
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61
9	75	65	59	55	74	64	59	55	63	58	54	62	58	54	62	57
10	71	61	55	52	70	61	55	52	60	55	51	59	55	51	59	54