

### Features

- 900mm diameter circular architectural luminaire, can be surface mounted or suspended. Powder coated aluminium housing (RAL9016) with polycarbonate opal diffuser. Direct light distribution, 10375lm luminous flux, 76.8W system power, 135lm/W luminaire efficacy. DALI dimmable. Colour rendering index Ra >80, 3000K Warm White LED, chromaticity tolerance of 3-step MacAdam ellipse. IP40/IP20, IK03. 450mA drive current. Electrical protection Class1, 220-240V. Reported lifetime 66k hours L90B10.


### Product Overview

Product name	COLOSSAL 900mm 830 OPAL DIR WHITE DALI
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
General application	Hospitality, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	10375
Luminaire efficacy (lm/W)	135
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	76.8
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)

COLOSSAL 900mm 830 OPAL DIR WHITE DALI  
2071233

<b>Housing colour</b>	RAL9016
<b>IP rating</b>	IP40/20
<b>IK rating</b>	IK07
<b>Product EAN number</b>	5025768712335
<b>Warranty</b>	5 years
<b>Dimming method</b>	DALI
<b>Colour Code</b>	830

## Photometry

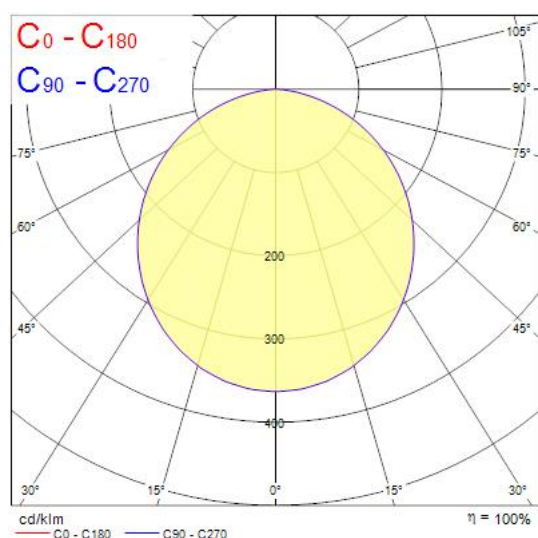

## Technical drawings

