


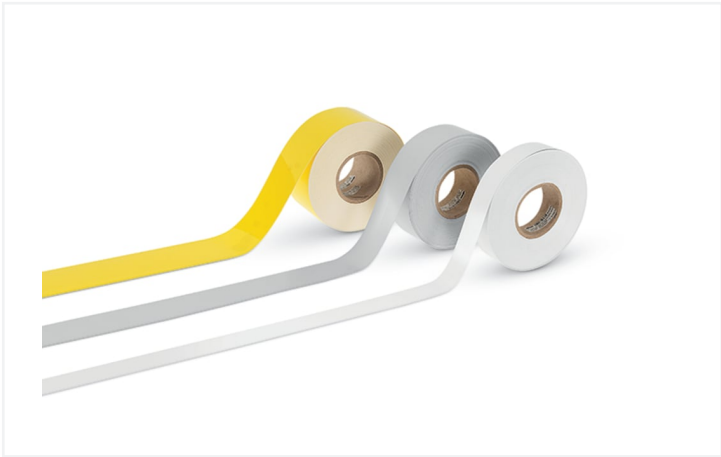

Color: white

Similar to illustration

Technical data	
Suitable	for TP 298+
Marking method	Thermal transfer
Marking	plain
Delivery form	Roll
Delivery form configuration	20 m; 1 line
Printing device	TP 298+

Physical data	
Width	100 mm
Depth	0.2 mm
Strip width	99 mm

Mechanical data	
Mounting type	Sticking
Smear resistance	in conjunction with 258-5005 Ink Ribbon

Material data	
Color	white
Material	Polyester
UV resistance	EN 60068-2-5:2010 Procedure B
Adhesive information	Acrylic; permanent
Halogen-free	Yes
Weight	0 g
Fire load	0 MJ



Environmental requirements	
Ambient temperature (storage)	+10 ... +21 °C
Ambient temperature (operation)	-40 ... +150 °C
Relative humidity	40 ... 50 %

Commercial data	
eCl@ss 10.0	27-40-06-29
eCl@ss 9.0	27-40-06-29
ETIM 9.0	EC001288
ETIM 8.0	EC001288
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143378956
Customs tariff number	39199080888

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 210-878

↓