


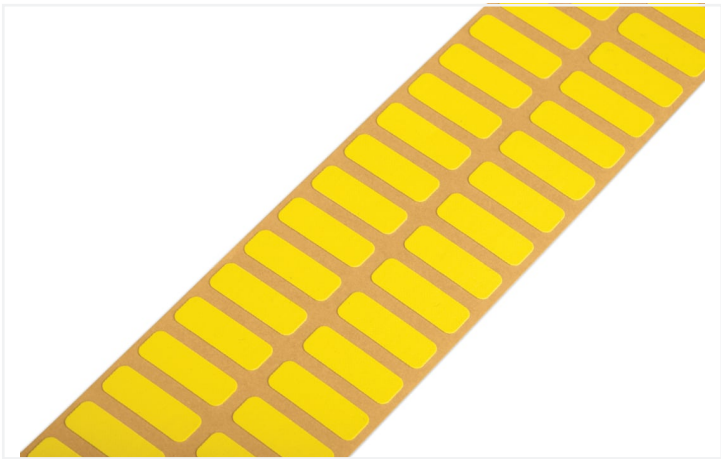

Color: yellow Similar to illustration

Technical data

Marking method	Thermal transfer
Marking	plain
Delivery form	Roll
Delivery form configuration	3,000 labels/reel; 2 lines
Printing device	Smart Printer (thermal transfer printer)

Physical data

Depth	0.26 mm
Marking surface	8 x 20 mm

Mechanical data

Mounting type	Sticking
Smear resistance	in conjunction with 258-5005 Ink Ribbon

Material data

Color	yellow
Material	Plastic-coated cotton fabric
UV resistance	EN 60068-2-5:2010 Procedure B
Adhesive information	Natural rubber
Halogen-free	Yes
Weight	187 g
Fire load	0 MJ



Environmental requirements	
Ambient temperature (storage)	+10 ... +21 °C
Ambient temperature (operation)	+180 °C
Relative humidity	40 ... 50 %

Commercial data	
eCl@ss 10.0	27-40-06-29
eCl@ss 9.0	27-40-06-29
ETIM 9.0	EC001288
ETIM 8.0	EC001288
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821674894
Customs tariff number	58071090000

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 210-811/000-002	

Documentation	
Operating Instructions	
210-811 Handha- bungshinweis zum Druckmaterial	128.08.2020pdf1397.18 KB

1 Compatible Products	
1.1 Optional Accessories	
1.1.1 Marking	
1.1.1.1 Marking device	



Item No.: 258-5000
Thermal transfer printer; Smart Printer; for complete control cabinet marking; 300 dpi; With marking material